



中国认可
国际互认
检测
TESTING
CNAS L6478



TEST REPORT

Reference No...... : WTF24F03044765E
Applicant..... : Mid Ocean Brands B.V.
Address..... : 7/F., Kings Tower, 111 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong
Manufacturer : 111033
Address..... : ---
Product Name..... : A4 portfolio
Model No...... : KC8063
Test specification..... : EN 55032:2015+A11:2020+A1:2020
EN 55035:2017+A11:2020
Date of Receipt sample : 2024-03-12
Date of Test..... : 2024-03-15 to 2024-03-19
Date of Issue..... : 2024-03-21
Test Report Form No...... : WEI-55032A-05B
Test Result..... : Pass

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:

Waltek Testing Group (Foshan) Co., Ltd.

Address: 1/F., Building 19, Sunlink Machinery City, Xingye 4 Road,
Guanglong Industrial Park, Chihua Neighborhood Committee, Chencun Town,
Shunde District, Foshan, Guangdong, China

Tel:+86-757-23811398

Fax:+86-757-23811381

E-mail:info@waltek.com.cn

Tested by:

Jess Chen

Jess Chen

Approved by:

Danny Zhou

Danny Zhou



1 Test Summary

EMISSION				
Test Item	Test Standard		Class / Severity	Result
Radiated Emission, 30MHz to 1000MHz	EN 55032:2015+A11:2020+A1:2020		Table A.4	Pass
IMMUNITY (EN 55035:2017+A11:2020)				
Test Item	Test Method	Class / Severity	Performance Criteria	Result
Electrostatic Discharge(ESD)	IEC 61000-4-2:2008	±4 Kv Contact ±8 Kv Air	B	Pass
Continuous RF Electromagnetic Field Disturbances	IEC 61000-4-3: 2006+A1+A2	3V/m, 80%, 1kHz, Amp. Mod.	A	Pass

Remark:

Pass Test item meets the requirement
Fail Test item does not meet the requirement
N/A Test case does not apply to the test object
A.M Amplitude Modulation

WALTEK



2 Contents

	Page
1 TEST SUMMARY	2
2 CONTENTS	3
3 GENERAL INFORMATION.....	4
3.1 GENERAL DESCRIPTION OF E.U.T.	4
3.2 DETAILS OF E.U.T.	4
3.3 DESCRIPTION OF SUPPORT UNITS	4
3.4 STANDARDS APPLICABLE FOR TESTING	4
3.5 TEST FACILITY.....	5
3.6 SUBCONTRACTED.....	5
3.7 ABNORMALITIES FROM STANDARD CONDITIONS.....	5
4 EQUIPMENT USED DURING TEST	6
4.1 SOFTWARE LIST	7
4.2 MEASUREMENT UNCERTAINTY	7
4.3 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT.....	7
4.4 DECISION RULE.....	7
5 EMISSION TEST RESULTS.....	8
5.1 RADIATED EMISSION, 30 MHz TO 1GHz.....	8
5.1.1 E.U.T. Operation	8
5.1.2 Block Diagram of Test Setup	8
5.1.3 Measurement Data	8
5.1.4 Corrected Amplitude & Margin Calculation	9
5.1.5 Radiated Emission Test Data.....	9
6 IMMUNITY TEST RESULTS.....	11
6.1 PERFORMANCE CRITERIA	11
6.2 ELECTROSTATIC DISCHARGE (ESD).....	12
6.2.1 E.U.T. Operation	12
6.2.2 Block Diagram of Setup	12
6.2.3 Direct Discharge Test Results	13
6.2.4 Indirect Discharge Test Results.....	13
6.3 CONTINUOUS RF ELECTROMAGNETIC FIELD DISTURBANCES.....	14
6.3.1 E.U.T. Operation	14
6.3.2 Block Diagram of Setup	14
6.3.3 Test Results.....	15
7 PHOTOGRAPHS – TEST SETUP	16
7.1 PHOTOGRAPH – RADIATED EMISSION TEST SETUP, 30MHz TO 1GHz.....	16
7.2 PHOTOGRAPH – ESD IMMUNITY TEST SETUP	16
7.3 PHOTOGRAPH – CONTINUOUS RF ELECTROMAGNETIC FIELD DISTURBANCES TEST SETUP	17
8 PHOTOGRAPHS – CONSTRUCTIONAL DETAILS	18
8.1 EUT – EXTERNAL VIEW	18



3 General Information

3.1 General Description of E.U.T.

Product Name : A4 portfolio

Model No. : KC8063

Remark : ---

3.2 Details of E.U.T.

Technical Data..... : Battery 1.5V

3.3 Description of Support Units

The EUT has been tested as an independent unit. KC8063 is the test sample. All tests were performed in the condition of Battery 1.5V.

3.4 Standards Applicable for Testing

The tests were performed according to following standards:

EN 55032:2015+A11:2020 Electromagnetic compatibility of multimedia equipment —
+A1:2020 Emission Requirements

EN 55035:2017+A11:2020 Electromagnetic compatibility of multimedia equipment - Immunity
requirements



3.5 Test Facility

The test facility has a test site registered with the following organizations:

- **ISED – Registration No.: 21895**

Waltek Testing Group (Foshan) Co., Ltd. has been registered and fully described in a report filed with the Innovation, Science and Economic Development Canada (ISED). The acceptance letter from the ISED is maintained in our files. Registration ISED number: 21895, March 12, 2019

- **FCC – Registration No.: 820106**

Waltek Testing Group (Foshan) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 820106, August 16, 2018

- **NVLAP – Lab Code: 600191-0**

Waltek Testing Group (Foshan) Co., Ltd. EMC Laboratory is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 600191-0.

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

3.6 Subcontracted

Whether parts of tests for the product have been subcontracted to other labs:

☐ Yes ☒ No

If Yes, list the related test items and lab information:

Test items: ---

Lab information: ---

3.7 Abnormalities from Standard Conditions

None.



4 Equipment Used during Test

☒ Radiated Emission (30MHz to 1GHz) 1#					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	3m Semi-anechoic Chamber	CHANGCHUANG	9m×6m×6m	---	Valid
2.	EMI Test Receiver	R&S	ESR7	101566	Valid
3.	Trilog Broadband Antenna	SCHWARZBECK	VULB 9162	9162-117	Valid
4.	Coaxial Cable (below 1GHz)	H+S	CBL3-NN-12+3 m	214NN320	Valid
☐ Radiated Emission (30MHz to 1GHz) 2#					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	3m Semi-anechoic Chamber	YIHENG	9m×6m×6m	YH2021071801	Valid
2.	EMI Test Receiver	R&S	ESR7	102454	Valid
3.	Trilog Broadband Antenna	SCHWARZBECK	VULB 9163	01418	Valid
4.	Coaxial Cable (below 1GHz)	Times-Microwave Systems	LMR240UF-NMSM-7.5	---	Valid
☒ ESD					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	ESD Simulator	TESEQ	NSG437	521	Valid
☒ Radio-frequency Electromagnetic Fields					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	RF Power Amplifier	OPHIR	5225R	1051/1712	Valid
2.	RF Power Amplifier	OPHIR	5293RE	1051/171	Valid
3.	Stacked double logarithmic periodic antenna	SCHWARZBECK	STLP9128E-SPECIAL	142	Valid
4.	Stacked double logarithmic periodic antenna	SCHWARZBECK	STLP 9149	476	Valid
5.	Analog signal generator	RS	SMB100A	105566	Valid
6.	Power meter	RS	NRP6A	101133	Valid
7.	Power meter	RS	NRP6A	101134	Valid

☐: Not Used

☒: Used



4.1 Software List

Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission 1#)	FARATRONIC	EZ-EMC	RA-03A1-1
EMI Test Software (Radiated Emission 2#)	FARATRONIC	EZ-EMC	RA-03A1-1
Radiated Immunity Test Software	TONSCEND	JS35-RS	V2.0.1.7

4.2 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Radiated Emission	30MHz~1GHz	±4.5dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

4.3 Special Accessories and Auxiliary Equipment

Item	Equipment	Technical Data	Manufacturer	Model No.	Serial No.
1.	/	/	/	/	/

4.4 Decision Rule

Compliance or non-compliance with a disturbance limit shall be determined in the following manner.

If U_{LAB} is less than or equal to U_{CISPR1} then

- Compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- Non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{LAB} is greater than U_{CISPR1} then

- Compliance is deemed to occur if no measured disturbance level, increased by $(U_{LAB} - U_{CISPR1})$, exceeds the disturbance limit;
- Non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{LAB} - U_{CISPR1})$, exceeds the disturbance limit.



5 Emission Test Results

5.1 Radiated Emission, 30 MHz to 1GHz

Test Requirement	: EN 55032 Annex A.2
Test Method.....	: EN 55032 Annex A.2
Test Limit.....	: Table A.4 of EN 55032
Test Result	: Pass
Frequency Range.....	: 30MHz to 1000MHz
Class.	: Class B

5.1.1 E.U.T. Operation

Operating Environment:


Temperature	: 23.3°C
Humidity	: 51.6%RH
Atmospheric Pressure	: 101.2kPa

EUT Operation:

Input Voltage	: Battery 1.5V
Operating Mode	: Working mode

5.1.2 Block Diagram of Test Setup

The Radiated Emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the CISPR 16-2-3.

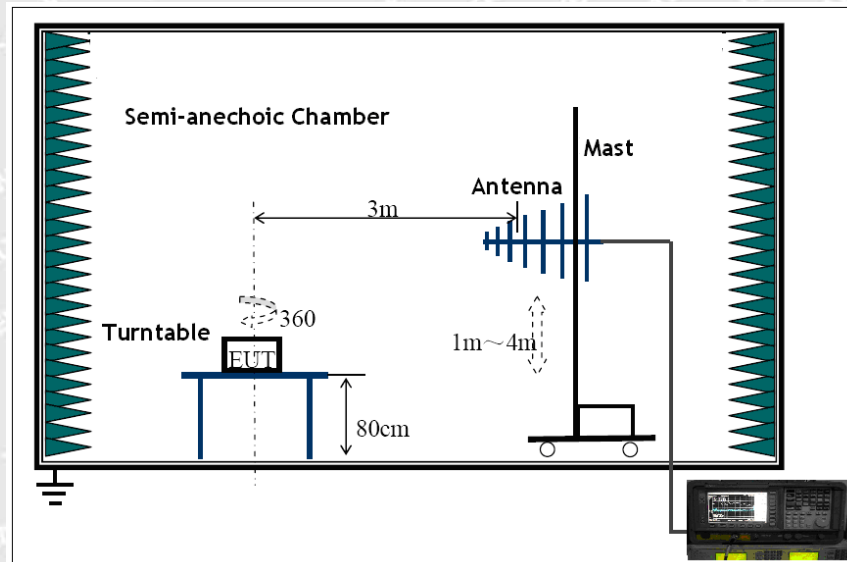

5.1.3 Measurement Data

The maximised peak emissions from the EUT was scanned and measured for EUT 0°-360°. Quasi-peak measurements were performed if peak emissions were within 6dB of the limit line.



5.1.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Corr. Factor}$$


$$\text{Corr. Factor} = \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

5.1.5 Radiated Emission Test Data

Vertical Polarization:

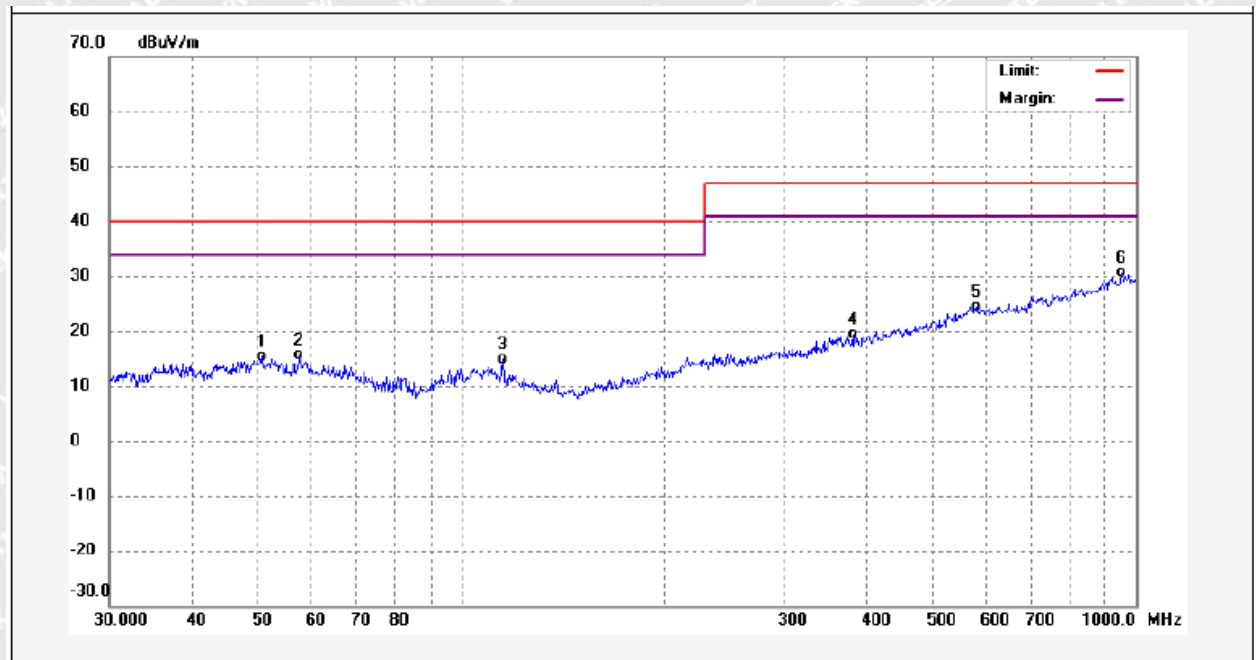

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	50.5328	1.00	14.27	15.27	40.00	-24.73	QP	
2	57.4527	1.21	14.36	15.57	40.00	-24.43	QP	
3	115.1993	2.93	12.02	14.95	40.00	-25.05	QP	
4	381.1150	1.39	17.97	19.36	47.00	-27.64	QP	
5	579.2790	1.56	22.82	24.38	47.00	-22.62	QP	
6	953.4301	2.98	27.63	30.61	47.00	-16.39	QP	

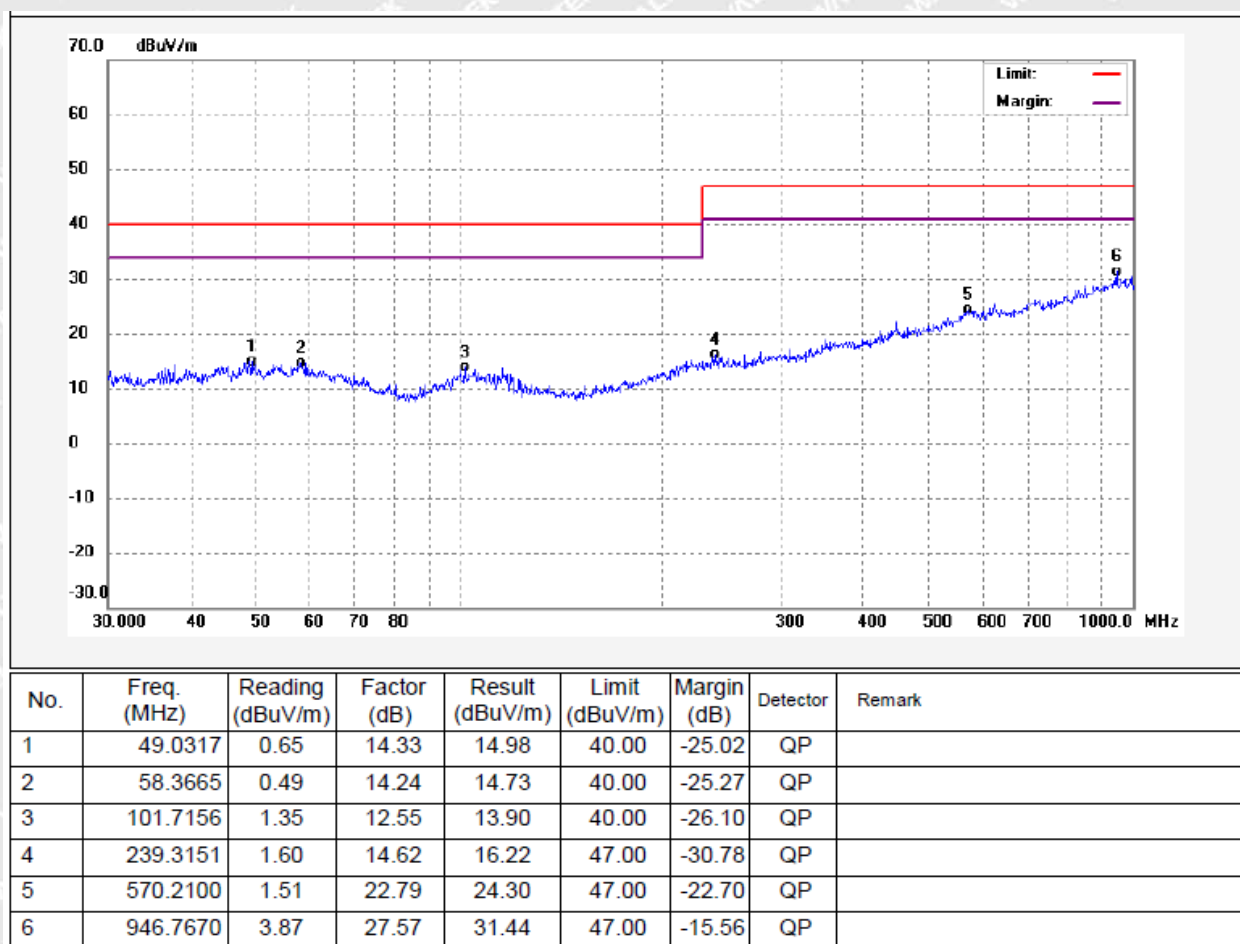**Horizontal Polarization:**



6 Immunity Test Results

6.1 Performance Criteria

Performance criterion A: The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer when the equipment is used as intended.

Performance criterion B: After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the equipment is used as intended. During the test, degradation of performance is allowed. However, no change of operating state or stored data is allowed to persist after the test

Performance criterion C: Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

WALTEK



6.2 Electrostatic Discharge (ESD)

Test Requirement	: EN 55035
Test Method	: IEC 61000-4-2
Test Result	: Pass
Discharge Impedance	: 330 Ω / 150pF
Discharge Voltage	: Air Discharge: $\pm 8\text{kV}$ Contact Discharge: $\pm 4\text{kV}$ HCP & VCP: $\pm 4\text{kV}$
Polarity	: Positive & Negative
Number of Discharge	: Minimum 10 times at each test point
Discharge Mode	: Single Discharge
Discharge Period	: 1 second minimum

6.2.1 E.U.T. Operation

Operating Environment:


Temperature	: 24.8 $^{\circ}\text{C}$
Humidity	: 54.6%RH
Barometric Pressure	: 101.3kPa

EUT Operation:

Input Voltage	: Battery 1.5V
Operating Mode	: On mode

6.2.2 Block Diagram of Setup

The ESD test was performed in accordance with the IEC 61000-4-2.

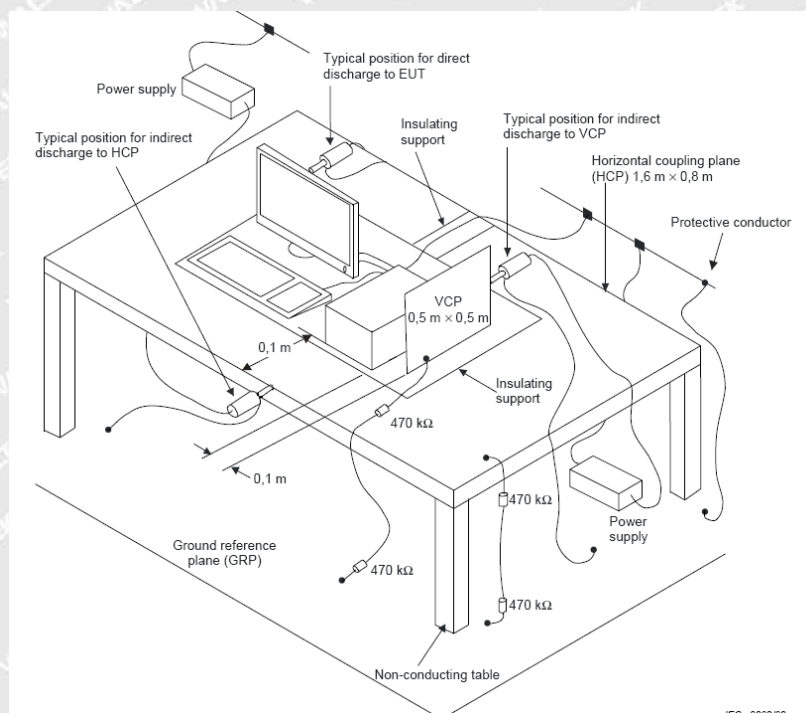



6.2.3 Direct Discharge Test Results

Observations:

Test points:

1. All Exposed Surface & Seams;
2. All metallic part

Direct Discharge			Test Results	
Applied Voltage (kV)	Performance Criterion	Test Point	Contact Discharge	Air Discharge
±8	B	1	N/A	Pass*
±4	B	2	Pass*	N/A

Remark:

- * During the test no deviation was detected to the selected operation mode(s)

6.2.4 Indirect Discharge Test Results

Observations:

Test points:

1. All sides.

Indirect Discharge			Test Results	
Applied Voltage (kV)	Performance Criterion	Test Point	Horizontal Coupling	Vertical Coupling
±4	B	1	Pass*	Pass*

Remark:

- * During the test no deviation was detected to the selected operation mode(s)



6.3 Continuous RF Electromagnetic Field Disturbances

Test Requirement	: EN 55035
Test Method	: IEC 61000-4-3
Test Result	: Pass
Frequency Range	: 80MHz to 1000MHz, 1800MHz, 2600MHz, 3500MHz, 5000MHz
Test level	: 3V/m
Modulation	: 80%, 1kHz Amplitude Modulation.
Face of EUT	: Front, Back, Left, Right
Antenna polarisation	: Horizontal & Vertical
Test Distance	: 3m

6.3.1 E.U.T. Operation

Operating Environment:


Temperature	: 23.1°C
Humidity	: 51.2%RH
Barometric Pressure	: 101.3kPa

EUT Operation:

Input Voltage	: Battery 1.5V
Operating Mode	: On mode

6.3.2 Block Diagram of Setup

The Radio-frequency electromagnetic fields Immunity test was performed in accordance with the IEC 61000-4-3.

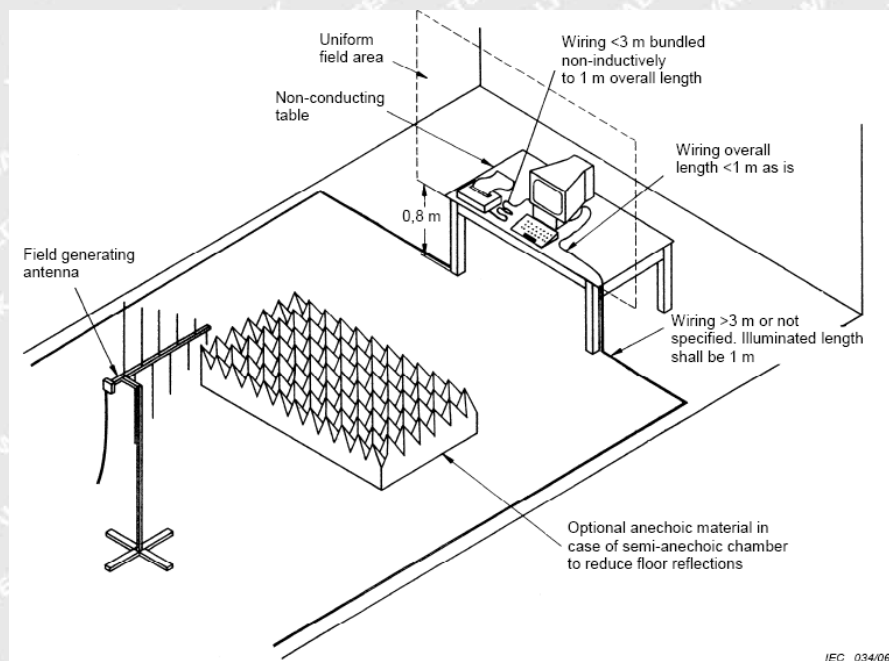



6.3.3 Test Results

Frequency	Face of EUT	Antenna polarisation	Test Level	Step Size	Dwell Time	Performance Criterion	Result
80 to 1000MHz	Front, Back, Left, Right	Horizontal	3V/m	1%	1s	A	Pass*
80 to 1000MHz	Front, Back, Left, Right	Vertical	3V/m	1%	1s	A	Pass*
1800MHz	Front, Back, Left, Right	Horizontal	3V/m	1%	1s	A	Pass*
1800MHz	Front, Back, Left, Right	Vertical	3V/m	1%	1s	A	Pass*
2600MHz	Front, Back, Left, Right	Horizontal	3V/m	1%	1s	A	Pass*
2600MHz	Front, Back, Left, Right	Vertical	3V/m	1%	1s	A	Pass*
3500MHz	Front, Back, Left, Right	Horizontal	3V/m	1%	1s	A	Pass*
3500MHz	Front, Back, Left, Right	Vertical	3V/m	1%	1s	A	Pass*
5000MHz	Front, Back, Left, Right	Horizontal	3V/m	1%	1s	A	Pass*
5000MHz	Front, Back, Left, Right	Vertical	3V/m	1%	1s	A	Pass*

Remark:

- * During the test no deviation was detected to the selected operation mode(s)



7 Photographs – Test Setup

7.1 Photograph – Radiated Emission Test Setup, 30MHz to 1GHz



7.2 Photograph – ESD Immunity Test Setup





7.3 Photograph – Continuous RF Electromagnetic Field Disturbances Test Setup




WALTEK



8 Photographs – Constructional Details

8.1 EUT – External View

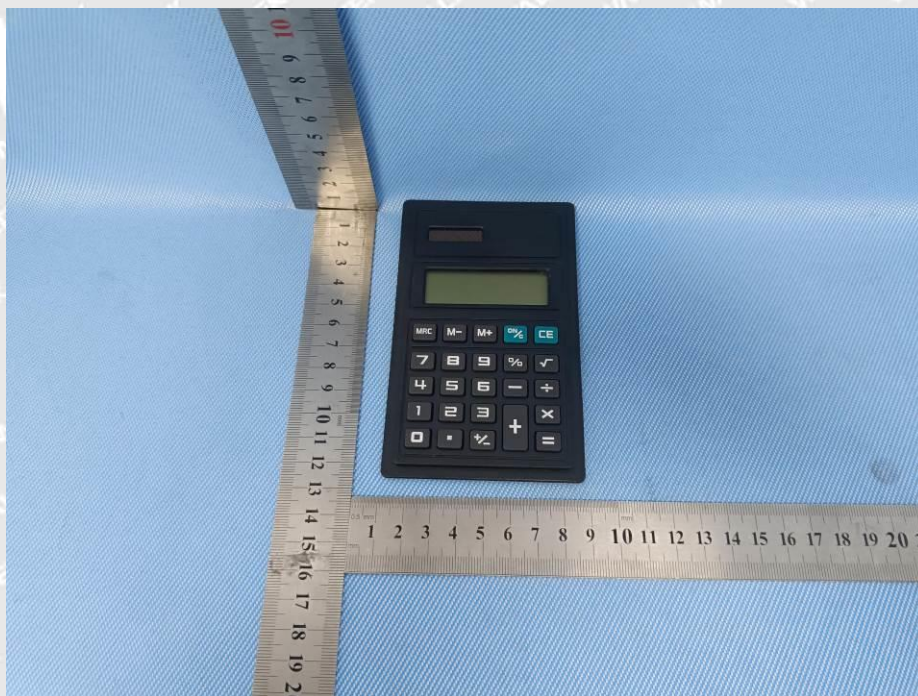

===== End of Report =====