

# **RF Test Report**

Report No.: AGC05443240925ER02

**PRODUCT DESIGNATION**: Wireless Power bank

**BRAND NAME** : N/A

MODEL NAME : MO2442

**APPLICANT** : MID OCEAN BRANDS B.V.

**DATE OF ISSUE** : Sep. 20, 2024

**STANDARD(S)** : ETSI EN 303 417 V1.1.1(2017-09)

**REPORT VERSION**: V1.0

Attestation of Global Conciliance (Shenzhen) Co., Ltd.



Page 2 of 31

#### REPORT REVISE RECORD

Rep	ort Version	Revise Time	Issued Date	Valid Version	Notes
	V1.0	1	Sep. 20, 2024	Valid	Initial Release



Page 3 of 31

#### **TABLE OF CONTENTS**

1. TEST RESULT CERTIFICATION	4
2. EUT DESCRIPTION	5
3. DESCRIPTION OF TEST ITEMS	6
4. TEST FACILITY	6
5. ETSI EN 303 417 REQUIREMENT	7
5.1 TRANSMITTER H-FIELD REQUIREMENTS	7
5.2 OPERATING FREQUENCY RANGES	12
5.3 TRANSMITTER OUT OF BAND (OOB) EMISSIONS	15
5.4 TRANSMITTER SPURIOUS EMISSIONS	
5.5 RECEIVER BLOCKING	
6. INTERPRETATION OF MEASUREMENT RESULTS	
APPENDIX I: PHOTOGRAPHS OF TEST SETUP	
APPENDIX II: PHOTOGRAPHS OF THE EUT	31



Report No.: AGC05443240925ER02 Page 4 of 31

# 1. TEST RESULT CERTIFICATION

MID OCEAN BRANDS B.V.				
7/F. Kings Tower , 111 King Lam Street,	Cheung Sha Wan, Kowloon, Hong Kong			
MID OCEAN BRANDS B.V.				
7/F. Kings Tower , 111 King Lam Street,	Cheung Sha Wan, Kowloon, Hong Kong			
MID OCEAN BRANDS B.V.				
7/F. Kings Tower , 111 King Lam Street,	Cheung Sha Wan, Kowloon, Hong Kong			
Wireless Power bank				
N/A				
MO2442				
N/A				
N/A				
Sep. 10, 2024				
Sep. 10, 2024~ Sep. 20, 2024				
<b>Deviation</b> None				
Normal				
Pass				
AGCRT-EC-RF				
	7/F. Kings Tower , 111 King Lam Street, MID OCEAN BRANDS B.V. 7/F. Kings Tower , 111 King Lam Street, MID OCEAN BRANDS B.V. 7/F. Kings Tower , 111 King Lam Street, Wireless Power bank N/A MO2442 N/A N/A Sep. 10, 2024 Sep. 10, 2024~ Sep. 20, 2024 None Normal Pass			

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By	Bibo zhang	
	Bibo Zhang (Project Engineer)	Sep. 20, 2024
Reviewed By	Calin Lin	
	Calvin Liu (Reviewer)	Sep. 20, 2024
Approved By	Max Zhang	
	Max Zhang Authorized Officer	Sep. 20, 2024



Page 5 of 31

#### 2. EUT DESCRIPTION

Details of technical specification refer to the description in follows:

Hardware Version	V1.0		
Software Version	V1.0		
Operate Frequency	110kHz-205kHz		
Modulation Type	ASK		
ocw	Energy transmission: Low channel 0.967kHz, Middle Channel 0.974kHz, High channel 0.983kHz Data communication: 0.874kHz		
Test Channels	Energy transmission: Low channel 118.1kHz, Middle Channel 149.6kHz, High channel 201.7kHz Data communication: 149.2kHz		
Antenna Type	Coil Antenna		
Operational Mode	Mode 1: base station in stand-by, idle mode Mode 3: communication Mode 4: energy transmission		
EUT Input& Output Rating	Type C Input: DC5V/2.4A,9V/2A Type C Output: DC 5V/3A,9V/2.22A,12V/1.66A		
Wireless Charging Output Power	5W,7.5W,10W,15W		

NOTE: 1. For more information, please refer to User's Manual.

- 2. During the initial establishment of the charging mode (mode 2), no or very low emission occur (below the sensitivity level of the test set-up), so the mode 2 can be assumed as irrelevant for the test.
- 3. Mode 3 and mode 4 have been performed within one set-up, worst-case alignment. But each mode have been tested separately with specific test software.
- 4. The maximum temperature of 40 is not a standard requirement and is measured according to the maximum service temperature stated by the manufacturer.
  - 5. The communication frequency 149.2kHz corresponds to the maximum field strength.



Page 6 of 31

#### 3. DESCRIPTION OF TEST ITEMS

	Harmonised Standard ETSI EN 303 417					
	Requirement	Requirement Conditionality				
No	Description	Requirement conditionality				
1	Permitted range of operating frequencies					
2	Operating frequency ranges					
3	H-field requirements					
4	Transmitter spurious emissions					
5	Transmitter out of band (OOB) emissions					
6	WPT system unwanted conducted emissions	☐ Applicable ☒ Not Applicable				
7	Receiver blocking					

#### 4. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



Page 7 of 31


#### 5. ETSI EN 303 417 REQUIREMENT

# **5.1 TRANSMITTER H-FIELD REQUIREMENTS**

#### **MEASUREMENT EQUIPMENT USED:**

NAME OF EQUIPMENT	MANUFACTURER	MODEL	S/N	Cal. Date	Cal. Due
Test Receiver	R&S	ESCI	10096	Feb. 01, 2024	Jan. 31, 2025
Power amplifier	AR	75A250	18464	N/A	N/A
Active Loop Antenna (9K-30Mhz)	ZHINAN	ZN30900C	18051	Mar. 05, 2024	Mar. 04, 2026

#### **TEST SETUP:**

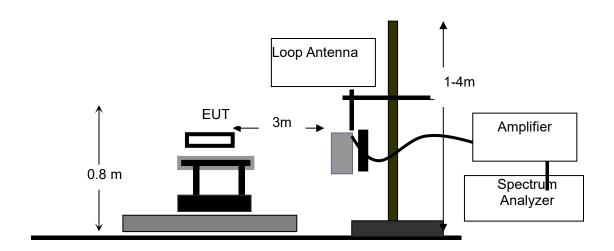



Page 8 of 31

#### **TEST LIMITS:**

The H-field limit in  $dB\mu A/m$  at 3 m,  $H_{3m}$ , is determined by the following equation:

$$H_{3m} = H_{10m} + C_3 (F.2)$$

Where:H<sub>10m</sub> is the H-field limit in dBµA/m at 10 m distance according to the present document; andC<sub>3</sub> is a conversion factor in dB determined from figure F.2.

According to EN 303 417 Tablet 3,

Table 3: H-field limits

Frequency range [MHz]	H-field strength limit [dBµA/m at 10 m]	Comments
0,019 ≤ f < 0,021	72	
0,059 ≤ f < 0,061	69,1 descending 10 dB/dec above 0,059 MHz	See note 1
0,079 ≤ f < 0,090	67,8 descending 10 dB/dec above 0,079 MHz	See note 2
0,100 ≤ f < 0,119	42	
0,119 ≤ f < 0,135	66 descending 10 dB/dec above 0,119 MHz	See note 1
0,135 ≤ f < 0,140	42	
0,140 ≤ f < 0,1485	37,7	
0,1485 ≤ f < 0,30	-5	
6,765 ≤ f < 6,795	42	

NOTE 1: Limit is 42 dBµA/m for the following spot frequencies: 60 kHz ± 250 Hz and 129,1 kHz ± 500 Hz.
NOTE 2: At the time of preparation of the present document the feasibility of increased limits for high power wireless power transmission systems to charge vehicles [i.4] was prepared. New specific requirements for such systems (e.g. higher H-field emission limits in the 79 - 90 kHz band) will be reflected within a future revision of the present document.

#### Correction factor, C3, for limits at 3 m distance, dB

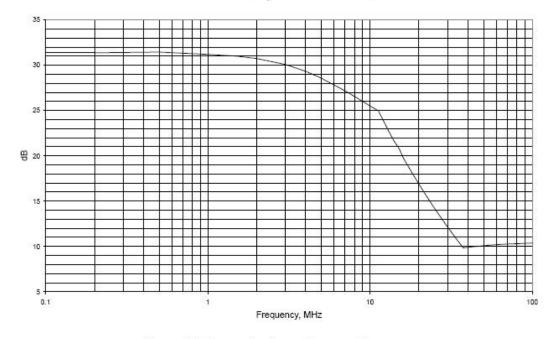


Figure F.2: Conversion factor C<sub>3</sub> versus frequency



Report No.: AGC05443240925ER02 Page 9 of 31

#### **TEST PROCEDURE:**

The EUT was placed on the top of an insulating table 0.8 meters above the ground at a semi-anechoic chamber.

The table was rotated 360 degrees to determine the position of the highest radiation.

The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

The H-field is measured with a shielded loop antenna connected to a measurement receiver.

The measuring bandwidth and detector type of the measurement receiver shall be in accordance with EN 300 330 V2.1.1 Table 11.

The EUT operate with modulation under normal and extreme conditions.

#### **TEST RESULTS:**

Test Mode: Mode 1

#### Extreme conditions state

conditions	Test Temp	Test Volt.(V)	Note
TN/VN	25℃	9.0	Worst case
TL/VL	0℃	8.1	
TH/VL	40℃	8.1	
TL/VH	0℃	9.9	
TH/VH	40℃	9.9	

#### Test results tested at 3m test sites:

Freq.	Antenna Factor	Reading Level	Corrected Level	Limit			
(MHz)	(dB/m)	(dBuA)	(dBuA/m)	(dBuA/m)			
0.1453	23.53	5.46	28.99	68.90			

#### Test results calculated to 10m test sites:

Freq.	Antenna Factor	Reading Level	Corrected Level	Limit
(MHz)	(dB/m)	(dBuA)	(dBuA/m)	(dBuA/m)
0.1453	23.53	-25.74	-2.21	37.70



Page 10 of 31

Test Mode: Mode 3

#### Extreme conditions state

conditions	Test Temp	Test Volt.(V)	Note
TN/VN	25℃	9.0	Worst case
TL/VL	-10°C	8.1	
TH/VL	45℃	8.1	
TL/VH	-10℃	9.9	
TH/VH	45℃	9.9	

#### Test results tested at 3m test sites:

Freq.	Antenna Factor	Reading Level	Corrected Level	Limit
(MHz)	(dB/m)	(dBuA)	(dBuA/m)	(dBuA/m)
0.1492	23.53	-6.39	17.14	26.20

#### Test results calculated to 10m test sites:

Freq.	Antenna Factor	Reading Level	Corrected Level	Limit
(MHz)	(dB/m)	(dBuA)	(dBuA/m)	(dBuA/m)
0.1492	23.53	-37.59	-14.06	-5.00



Page 11 of 31

#### Test Mode: Mode 4

#### Extreme conditions state

conditions	Test Temp	Test Volt.(V)	Note
TN/VN	25℃	9.0	Worst case
TL/VL	-10℃	8.1	
TH/VL	45℃	8.1	
TL/VH	-10℃	9.9	
TH/VH	45℃	9.9	

#### Test results tested at 3m test sites:

Freq.	Antenna Factor	Reading Level	Corrected Level	Limit
(MHz)	(dB/m)	(dBuA)	(dBuA/m)	(dBuA/m)
0.1181	23.53	-9.12	14.41	73.20
0.1496	23.53	-4.27	19.26	26.20
0.2017	23.53	-3.59	19.94	26.20

#### Test results calculated to 10m test sites:

Freq.	Antenna Factor	Reading Level	Corrected Level	Limit
(MHz)	(dB/m)	(dBuA)	(dBuA/m)	(dBuA/m)
0.1181	23.53	-40.32	-16.79	42.00
0.1496	23.53	-35.47	-11.94	-5.00
0.2017	23.53	-34.79	-11.26	-5.00

#### Remark:

(1) Corrected Level (dBuA/m) = Reading Level + Antenna Factor

(2) For the calculated method, please refer to Annex F at EN 300330.

(3) All extreme conditions were considered for test, but only record the worst case.




Page 12 of 31

#### **5.2 OPERATING FREQUENCY RANGES**

#### **MEASUREMENT EQUIPMENT USED:**

NAME OF EQUIPMENT	MANUFACTURER	MODEL	S/N	Cal. Date	Cal. Due
Test Receiver	R&S	ESCI	10096	Feb. 01, 2024	Jan. 31, 2025
Power amplifer	AR	75A250	18464	N/A	N/A
Active loop antenna(9K-30MHz)	ZHINAN	ZN30900C	18051	Mar. 05, 2024	Mar. 04, 2026

#### **TEST SETUP:**

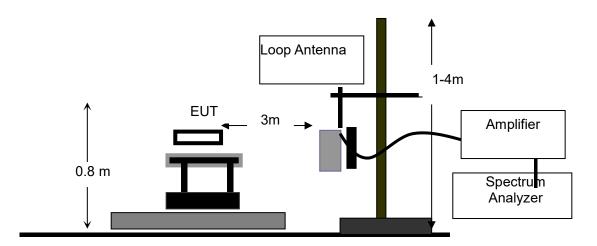

#### **TEST PROCEDURE:**

- 1). The EUT was placed on a turn table which is 0.8m above ground plane.
- 2). The EUT was modulated by normal signal,
- 3).Set SPA Center Frequency = fundamental frequency, RBW=VBW=200Hz, Span=5kHz, Detector=RMS. The 99 % OBW function shall be used to determine the operating frequency range, fH is the frequency of the upper marker resulting from the OFR, fL is the frequency of the lower marker resulting from the OFR.
- 4), Both normal test condition and extreme test condition applied

#### **LIMITS**

The operating frequency range for emissions shall be within one of the following limits: 19 - 21 kHz, 59 - 61 kHz, 79 - 90 kHz, 100 - 300 kHz, 6 765 - 6 795 kHz.



Page 13 of 31

#### **TEST RESULT**

Test Mode: Mode 1

# Frequency Range Test Result

Test Temperature	Test Voltage (V DC)	Lowest Frequency(K Hz)	Highest Frequency (KHz)	Limit
0℃	8.1	145.059	145.541	100kHz≤&≤300kHz
00	8.1	145.059	145.541	100kHz≤&≤300kHz
25℃	9.0	145.055	145.546	100kHz≤&≤300kHz
40℃	9.9	145.055	145.543	100kHz≤&≤300kHz
40 C	9.9	145.055	145.545	100kHz≤&≤300kHz
OF	R	0.491kHz		
Resi	ults	PASS		

Test Mode: Mode 3

# Frequency Range Test Result

Test Temperature	Test Voltage (V DC)	Lowest Frequency(K Hz)	Highest Frequency (KHz)	Limit
-10°C	8.1	148.763	149.635	100kHz≤&≤300kHz
-10 C	8.1	148.766	149.634	100kHz≤&≤300kHz
25℃	9.0	148.763	149.637	100kHz≤&≤300kHz
45℃	9.9	148.766	149.634	100kHz≤&≤300kHz
45 C	9.9	148.765	149.632	100kHz≤&≤300kHz
OFR		0.874kHz		
Result	S	PASS		



Page 14 of 31

Test Mode: Mode 4

# Frequency Range Test Result

Test Temperature	Test Voltage (V DC)	Lowest Frequency(K Hz)	Highest Frequency (KHz)	Limit
-10°C	8.1	117.618	202.190	100kHz≤&≤300kHz
-10 C	8.1	117.620	202.190	100kHz≤&≤300kHz
25℃	9.0	117.617	202.192	100kHz≤&≤300kHz
45℃	9.9	117.617	202.189	100kHz≤&≤300kHz
45 C	9.9	117.617	202.188	100kHz≤&≤300kHz
OFR	OFR		84.5	i75kHz
Results	;	PASS		

**NOTE:** All the modes had been tested, but only the worst data recorded in the report.




Page 15 of 31

# 5.3 TRANSMITTER OUT OF BAND (OOB) EMISSIONS

#### **MEASUREMENT EQUIPMENT USED:**

NAME OF EQUIPMENT	MANUFACTURER	MODEL	S/N	Cal. Date	Cal. Due
Test Receiver	R&S	ESCI	10096	Feb. 01, 2024	Jan. 31, 2025
Power amplifer	AR	75A250	18464	N/A	N/A
Active loop antenna(9K-30MHz)	ZHINAN	ZN30900C	18051	Mar. 05, 2024	Mar. 04, 2026

#### **TEST SETUP:**

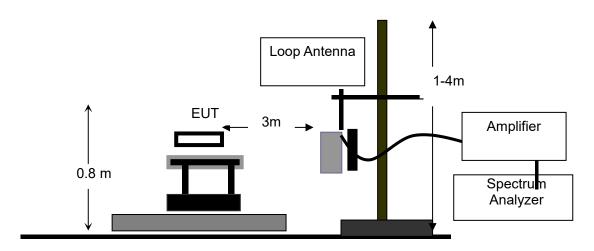

#### **TEST PROCEDURE:**

- 1). The EUT was placed on a turn table which is 0.8m above ground plane.
- 2). The EUT was modulated by normal signal,
- 3).Set SPA Center Frequency = fundamental frequency, RBW=VBW=200Hz, Span=5KHz, Detector=RMS. The 99 % OBW function shall be used to determine the operating frequency range, fH is the frequency of the upper marker resulting from the OFR, fL is the frequency of the lower marker resulting from the OFR.
- 4), Both normal test condition and extreme test condition applied



#### **LIMITS**

The OOB limits are visualized in figures; they are descending from the intentional limits from Table 3 at fH/fL with 10 dB/decade.

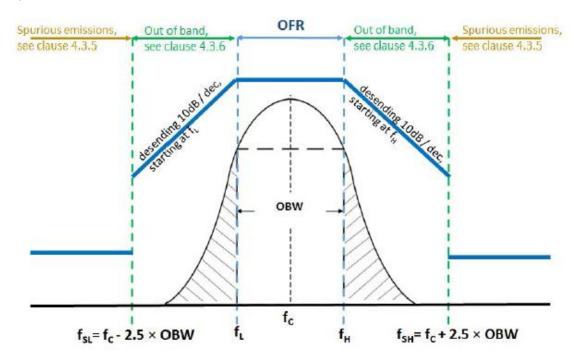


Figure 4: Out of band and spurious domain of a single frequency WPT system



Report No.: AGC05443240925ER02 Page 17 of 31

**TEST RESULT**Test Mode: Mode 1

Frequency range (KHz)		Maximum level @10m (dBuA/m)	Limit @ 10m (dBuA/m)	Result
fSL -fL	144.073 to 145.055	Less than -11.37	See figure 4	Pass
fL	145.055	-11.37	37.70	Pass
fH	145.546	-11.89	37.70	Pass
fH - fSH	145.546 to 146.528	Less than -11.89	See figure 4	Pass

Test Mode: Mode 3

Frequency range (KHz)		Maximum level @10m (dBuA/m)	Limit @ 10m (dBuA/m)	Result
fSL-fL	147.015 to 148.763	Less than -23.22	See figure 4	Pass
fL	148.763	-23.22	-5.00	Pass
fH	149.637	-23.74	-5.00	Pass
fH-fSH	149.637 to 151.385	Less than -23.74	See figure 4	Pass

Test Mode: Mode 4

Frequency range (KHz)		Maximum level @10m (dBuA/m)	Limit @ 10m (dBuA/m)	Result
fSL-fL	115.683 to 117.617	Less than -25.95	See figure 4	Pass
fL	117.617	-25.95	42.00	Pass
fH	202.192	-20.94	-5.00	Pass
fH-fSH	202.192 to 204.158	Less than -20.94	See figure 4	Pass

NOTE: All the modes had been tested, but only the worst data recorded in the report.



Page 18 of 31


#### **5.4 TRANSMITTER SPURIOUS EMISSIONS**

# **MEASUREMENT EQUIPMENT USED:**


NAME OF EQUIPMENT	MANUFACTURER	MODEL	S/N	Cal. Date	Cal. Due
Test Receiver	R&S	ESCI	10096	Feb. 01, 2024	Jan. 31, 2025
Power amplifer	AR	75A250	18464	N/A	N/A
Active loop antenna(9K-30MHz)	ZHINAN	ZN30900C	18051	Mar. 05, 2024	Mar. 04, 2026
ANTENNA	SCHWARZBECK	VULB9168	494	Jan. 05, 2023	Jan. 04, 2025

#### **TEST SETUP:**

FREQUENCY RANGE (9KHZ-30MHZ)

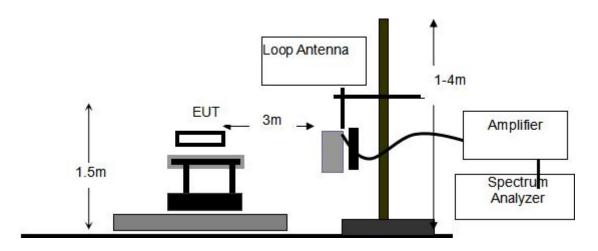

# FREQUENCY RANGE (ABOVE 30MHZ)

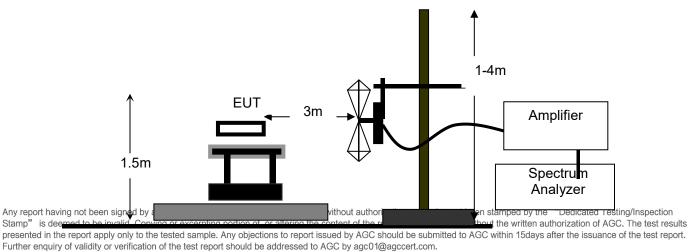


Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



Page 19 of 31

#### **SUBSTITUTION METHOD:**

#### **RADIATED BELOW 1GHZ**

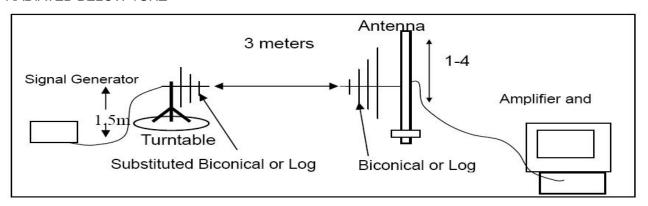

#### **TEST PROCEDURE:**

For test method of frequency range (9kHz-30MHz)

The EUT was placed on the top of an insulating table 1.5 meters above the ground at a semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

The H-field is measured with a shielded loop antenna connected to a measurement receiver.

The measuring bandwidth and detector type of the measurement receiver shall be in accordance with EN 300 330 Table 1.

For test method of frequency range (30 MHz-1000MHz)

EUT was placed on a 1.5m height wooden table. The search antenna is placed at 3m distances from the EUT and search antenna height is from 1-4m. With the transmitter operating at continuously mode, the turntable was slowly rotated to locate the direction of maximum emission. Once maximum direction is determined, the search antenna was raised and lowered in both vertical and horizontal polarizations.

The EUT was removed from the turntable and replaced with a linearly polarized antenna connected to a calibrated RF signal generator. The RF generator was set to a measured emission frequency and the search antenna was raised and lowered to produce a maximum received reading. The generator output was increased to match the radiated emission reading measured previously, and the result expressed in dB EIRP or ERP, correcting for substitution antenna gain at each frequency.



Page 20 of 31

#### **LIMITS OF RADIATED DISTURBANCES**

Below 30MHz

# Table 4

State (see note)	Frequency 9 kHz ≤ f < 10 MHz	Frequency 10 MHz ≤ f < 30 MHz	
Operating	27 dBμA/m at 9 kHz descending 10 dB/dec	-3,5 dBμA/m	
Standby	5,5 dBμA/m at 9 kHz descending 10 dB/dec	-25 dBμA/m	
	g" means mode 2, 3 and 4 according to To to Table 2.	able 2; "standby" means mode 1	

ABOVE 30MHz

#### Table 5

State (see note)	47 MHz to 74 MHz 87,5 MHz to 118 MHz 174 MHz to 230 MHz 470 MHz to 790 MHz	Other frequencies between 30 MHz to 1 000 MHz
Operating	4 nW	250 nW
Standby	2 nW	2 nW
NOTE: "Operating" means	mode 2, 3 and 4 according to Table 2;	"standby" means mode 1 according to
Table 2.		



Page 21 of 31

#### **TEST LIMITS & RESULT**

**Test Mode: Mode 3** 

FREQUENCY RANGE (9KHZ-30MHZ)

	Operation Mode										
Frequency	Reading level	Total Factor	Emission level	Limit	Margin						
(MHz)	(dB µA)	(dB/m )	(dB μA/m)	(dBµA/m)	(dBµA/m)						
0.059	-7.77	-7.96	-15.73	18.84	34.56						
0.234	-11.54	-7.96	-19.50	12.86	32.36						
0.576	-12.73	-7.96	-20.69	8.94	29.63						
1.464	-14.42	-3.98	-18.40	4.89	23.28						
3.048	-13.18	-3.09	-16.27	1.70	17.98						
3.831	-12.39	-1.25	-13.64	0.71	14.35						

#### Remark:

(1) Corrected Power (dBm)= Total Factor + Reading Level

(2) Measuring frequencies from 9KHz to the 30MHz.

Data of measurement within this frequency range shown " -- " in the table above means the

reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.



Page 22 of 31

#### FREQUENCY RANGE (ABOVE 30MHZ)

Transmitter Spurious Emission below 1GHz (30MHz-1GHz)

Frequency	Reading Level	Antenna	S.G.	Cable Loss	Ant.Gain	Emission Level	Limit	Margin
(MHz)	(dBuv/m)	Polarization	(dBm)	(dB)	(dBi)	(dBm)	(dBm)	(dB)
82.53	31.36	V	-62.82	0.04	0.22	-62.64	-36.00	26.64
153.49	27.42	V	-66.59	0.06	0.70	-65.95	-36.00	29.95
352.32	31.21	V	-66.63	0.25	5.76	-61.12	-36.00	25.12
427.73	27.85	V	-71.23	0.33	6.96	-64.60	-36.00	28.60
631.36	28.24	V	-72.43	0.52	7.28	-65.67	-54.00	11.67
760.90	27.21	V	-72.78	0.61	6.60	-66.79	-36.00	30.79
94.57	30.63	Н	-63.72	0.04	1.72	-62.04	-54.00	8.04
151.83	26.12	Н	-67.63	0.06	0.70	-66.99	-36.00	30.99
350.39	29.94	Н	-68.89	0.25	5.50	-63.63	-36.00	27.63
433.25	27.83	Н	-70.89	0.34	6.69	-64.54	-36.00	28.54
630.62	28.87	Н	-71.24	0.52	7.30	-64.45	-54.00	10.45
728.38	28.98	Н	-71.20	0.59	6.70	-65.09	-36.00	29.09

Note: 1.The margins of the other spectrum are not exceeding the minimum value of margin, and this part of the results without recording in the test report.

2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "--" remark, if no specific emission from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.



Page 23 of 31

# Test Mode: Mode 4(The low channel is the worst case) FREQUENCY RANGE (9KHZ-30MHZ)

Operation Mode										
Frequency	Reading level	Total Factor	Emission level	Limit	Margin					
(MHz)	(dB µA)	(dB/m )	(dB μA/m)	(dBµA/m)	(dBµA/m)					
0.024	-7.96	-7.96	-15.92	22.83	38.75					
0.230	-11.47	-7.96	-19.43	12.93	32.36					
0.462	-12.81	-7.96	-20.77	9.89	30.67					
1.658	-14.51	-3.98	-18.49	4.35	22.84					
3.194	-13.30	-3.09	-16.39	1.50	17.89					
4.466	-12.43	-1.25	-13.68	0.04	13.72					

#### Remark:

- (1) Corrected Power (dBm) = Total Factor + Reading Level
- (2) Measuring frequencies from 9KHz to the 30MHz.
- Data of measurement within this frequency range shown " -- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.



Page 24 of 31

#### FREQUENCY RANGE (ABOVE 30MHZ)

Transmitter Spurious Emission below 1GHz (30MHz-1GHz)

Frequency	Reading Level	Antenna	S.G.	Cable Loss	Ant.Gain	Emission Level	Limit	Margin
(MHz)	(dBuv/m)	Polarization	(dBm)	(dB)	(dBi)	(dBm)	(dBm)	(dB)
85.16	32.18	V	-61.59	0.04	0.70	-60.93	-36.00	24.93
157.08	27.75	V	-66.84	0.06	0.90	-66.00	-36.00	30.00
356.38	31.66	V	-67.22	0.25	6.28	-61.19	-36.00	25.19
424.52	26.95	V	-72.83	0.33	7.02	-66.15	-36.00	30.15
628.94	29.71	V	-70.62	0.51	7.22	-63.91	-54.00	9.91
760.94	27.91	V	-70.63	0.61	6.60	-64.64	-36.00	28.64
97.43	31.71	Н	-63.92	0.04	1.60	-62.36	-54.00	8.36
151.68	27.38	Н	-67.14	0.06	0.70	-66.50	-36.00	30.50
349.89	29.92	Н	-68.45	0.24	5.52	-63.17	-36.00	27.17
431.69	27.62	Н	-71.23	0.34	6.83	-64.74	-36.00	28.74
631.38	29.33	Н	-70.40	0.52	7.28	-63.63	-54.00	9.63
731.80	27.41	Н	-72.91	0.59	6.76	-66.74	-36.00	30.74

Note: 1.The margins of the other spectrum are not exceeding the minimum value of margin, and this part of the results without recording in the test report.

2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "--" remark, if no specific emission from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.



Page 25 of 31

Test Mode: Mode 1

FREQUENCY RANGE (9KHZ-30MHZ)

Standby Mode										
Frequency	Reading level	Total Factor	Emission level	Limit	Margin					
(MHz)	(dB µA)	(dB/m)	(dB μA/m)	(dBµA/m)	(dBµA/m)					
0.043	-7.28	-7.96	-15.24	-1.27	13.97					
0.265	-10.20	-7.96	-18.16	-9.20	8.97					
0.429	-11.18	-7.96	-19.14	-11.28	7.87					
1.616	-23.01	-3.98	-26.99	-17.04	9.95					
3.686	-27.97	-3.09	-31.06	-20.62	10.43					
5.723	-26.47	-1.25	-27.72	-22.53	5.18					

#### Remark:

- (1) Corrected Power (dBm) = Total Factor + Reading Level
- (2) Measuring frequencies from 9KHz to the 30MHz.
- Data of measurement within this frequency range shown " -- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.



Page 26 of 31

#### FREQUENCY RANGE (ABOVE 30MHZ)

Transmitter Spurious Emission below 1GHz (30MHz-1GHz)

Frequency	Reading Level	Antenna	S.G.	Cable Loss	Ant.Gain	Emission Level	Limit	Margin
(MHz)	(dBuv/m)	Polarization	(dBm)	(dB)	(dBi)	(dBm)	(dBm)	(dB)
85.39	27.12	V	-67.66	0.04	0.70	-67.00	-57.00	10.00
158.42	28.65	V	-65.53	0.06	1.00	-64.59	-57.00	7.59
360.32	28.53	V	-71.25	0.26	6.80	-64.71	-57.00	7.71
534.39	27.99	V	-71.85	0.44	6.84	-65.45	-57.00	8.45
675.69	30.30	V	-69.66	0.55	6.60	-63.61	-57.00	6.61
831.55	29.11	V	-70.46	0.66	6.37	-64.75	-57.00	7.75
124.28	28.06	Н	-65.05	0.04	0.40	-64.69	-57.00	7.69
161.65	29.83	Н	-63.72	0.06	1.28	-62.50	-57.00	5.50
343.43	29.14	Н	-69.44	0.24	5.64	-64.04	-57.00	7.04
536.52	28.82	Н	-70.02	0.45	6.96	-63.51	-57.00	6.51
675.81	29.74	Н	-68.64	0.55	6.60	-62.59	-57.00	5.59
826.99	28.37	Н	-70.00	0.66	6.50	-64.15	-57.00	7.15

Note: 1.The margins of the other spectrum are not exceeding the minimum value of margin, and this part of the results without recording in the test report.

2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "--" remark, if no specific emission from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.




Report No.: AGC05443240925ER02 Page 27 of 31

#### **5.5 RECEIVER BLOCKING**

#### **MEASUREMENT EQUIPMENT USED:**

NAME OF EQUIPMENT	MANUFACTURER	MODEL	S/N	Cal. Date	Cal. Due
MXG X-Series Vector Signal Generator	Agilent	N5182B	MY53050647	Feb. 01, 2024	Jan. 31, 2025
Active loop antenna(9K-30MHz)	ZHINAN	ZN30900C	18051	Mar. 05, 2024	Mar. 04, 2026
Clamp meter	PROVA	PROVA-11	17200101	Sep. 02, 2024	Sep. 01, 2025

#### **TEST SETUP:**

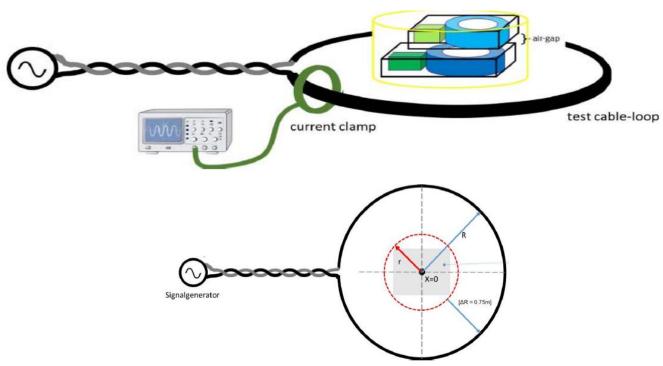

#### **TEST PROCEDURE:**

- 1). The test shall be carried out inside a test chamber according to clauses C.1.1 and C.1.2 in ETSI EN 300 330
- 2). A test loop with a radius r shall be used to create the magnetic field; the test loop shall lie on a non-metallic ground and the minimum distance to metallic objects (e.g. ground plane) shall be 0,75 m.The EUT shall be placed to the centre of the test-loop
- 3). The test loop shall be sufficiently large so that the test loop itself does not influence the WPT system; The radius R of the test-loop shall be in minimum  $\Delta R = 0.75$  m larger than the maximum dimension r of the EUT.

$$R >= r + \Delta R$$
.

The maximum H-Field can be calculated from the loop current I (into the test-loop) with the following formula:

H=I/2R



Page 28 of 31

4)The required output current to achieve the required magnetic field at the WPT system shall be generated with a signal generator (unmodulated signal) at the test frequencies. For each test frequency the "reaction" of the device shall be recorded and checked against the performance criterion

#### **LIMITS**

The EUT shall achieve the wanted performance criterion, in the presence of the blocking signal.

Table 6: Receiver blocking limits

8	In-band signal	OOB signal	Remote-band signal
Frequency	Centre frequency (f <sub>c</sub> ) of the WPT	$f = f_c \pm F$ (see note)	$f = f_c \pm 10 \times F$ (see note)
	system (see clause 4.3.3)	253	25.3
Signal level field strength at	72 dBµA/m	72 dBµA/m	82 dBµA/m
the EUT	C SANDYAN SAND NA THE EMISSION	0.000 VEX.000 12 • 0.000 VEX.000 VE	
NOTE: F = OFR see claus	e 4.3.3.		

#### **TEST RESULT**

Test Mode: Mode 1

Test F	Frequency(KHz)	Signal level @ EUT	Performance	Result
In-band signal	145.300	72dBuA/m	No function loss	Pass
OOB signal	144.809	72dBuA/m	No function loss	Pass
o o b o ignar	145.791	72dBuA/m	No function loss	Pass
Remote-band	140.390	82dBuA/m	No function loss	Pass
signal	150.210	82dBuA/m	No function loss	Pass

Test Mode: Mode 3

Test F	Frequency(KHz)	Signal level @ EUT	Performance	Result
In-band signal	149.200	72dBuA/m	No function loss	Pass
OOB signal	148.326	72dBuA/m	No function loss	Pass
	150.074	72dBuA/m	No function loss	Pass
Remote-band signal	140.460	82dBuA/m	No function loss	Pass
	157.940	82dBuA/m	No function loss	Pass




Page 29 of 31

#### 6. INTERPRETATION OF MEASUREMENT RESULTS

All the measurement equipments and accessories have been carefully selected to meet the maximum measurement uncertainty specified below:

RF Frequency	± 1 x 10 <sup>-7</sup>
RF Power, Conducted	± 0.75dB
Maximum Frequency Deviation: _ Within 300Hz and 6KHz of Audio Frequency _ Within 6KHz and 25KHz of Audio Frequency	± 5% ± 3dB
Adjacent channel power	± 3dB
Conducted Emission of Transmitter, Valid Up to 12.75GHz	
Conducted Emissions of Receivers	
Radiated Emission of Transmitter, Valid Up to 12.75GHz	

P.S. Uncertainty figures are valid to confidence level of 95% calculated according to the methods described in the ETSI TR 100 028.





**APPENDIX I: PHOTOGRAPHS OF TEST SETUP** 







Page 31 of 31

#### APPENDIX II: PHOTOGRAPHS OF THE EUT

Refer to the Report No.: AGC05443240925AP01
----END OF REPORT----



# Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.



# **Health Test Report**

Report No.: AGC05443240925EH01

**PRODUCT DESIGNATION**: Wireless Power bank

**BRAND NAME** : N/A

MODEL NAME : MO2442

**APPLICANT**: MID OCEAN BRANDS B.V.

**DATE OF ISSUE** : Sep. 20, 2024

**STANDARD(S)** : EN IEC 62311:2020 EN 50665:2017

**REPORT VERSION**: V1.0

Attestation of Global Confice (Shenzhen) Co., Ltd.



Page 2 of 17

# REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	1	Sep. 20, 2024	Valid	Initial release



Page 3 of 17

# **TABLE OF CONTENTS**

1. GENERAL INFORMATION	4
2. TECHNICAL INFORMATION	5
3. RF EXPOSURE MEASUREMENT	6
3.1 INTRODUCTION	6
3.2 TEST LIMIT	7
3.3 EVALUATION METHODS	8
4. TEST EQUIPMENT LIST	10
5. EUT OPERATION CONDITION	
4. TEST RESULT	
5. CONCLUSION	11
APPENDIX I: PHOTOGRAPHS OF TEST SETUP	12



Page 4 of 17

#### 1. GENERAL INFORMATION

Applicant	MID OCEAN BRANDS B.V.
Address	7/F. Kings Tower , 111 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong
Manufacturer	MID OCEAN BRANDS B.V.
Address	7/F. Kings Tower , 111 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong
Factory	MID OCEAN BRANDS B.V.
Address	7/F. Kings Tower , 111 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong
Product Designation	Wireless Power bank
Brand Name	N/A
Test Model	MO2442
Series Model	N/A
Difference Description	N/A
Date of receipt of test item	Sep. 10, 2024
Date of test	Sep. 10, 2024~ Sep. 20, 2024
Test Result	Pass

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By	Bibo zhang	
_	Bibo Zhang (Project Engineer)	Sep. 20, 2024
Reviewed By	Calin Lin	
	Calvin Liu (Reviewer)	Sep. 20, 2024
Approved By	Max Zhang	
	Max Zhang Authorized Officer	Sep. 20, 2024



Page 5 of 17

### 2. TECHNICAL INFORMATION

Note: the following data is based on the information by the applicant.

tote. the following data is based on the information by the applicant.			
Product Designation	Wireless Power bank		
Brand Name	N/A		
Test Model	MO2442		
Hardware Version	V1.0		
Software Version	V1.0		
Operation Frequency	110kHz-205kHz		
Modulation type	ASK		
Antenna Type	Coil Antenna		
EUT Input& Output Rating	Type C Input: DC5V/2.4A,9V/2A Type C Output: DC 5V/3A,9V/2.22A,12V/1.66A		
Wireless Charging Output Power	5W,7.5W,10W,15W		

Note: For more details, please refer to the user's manual of the EUT.



Page 6 of 17

## 3. RF EXPOSURE MEASUREMENT

#### 3.1 INTRODUCTION

This International Standard applies to electronic and electrical equipment for which no dedicated product- or product family standard regarding human exposure to electromagnetic fields applies.

This generic standard applies to electronic and electrical apparatus for which no dedicated product- or product family standard regarding human exposure to electromagnetic fields applies.

The frequency range covered is 0 Hz to 300 GHz.

The object of this generic standard is to provide assessment methods and criteria to evaluate such equipment against basic restrictions or reference levels on exposure of the general public related to electric, magnetic, electromagnetic fields and induced and contact current.

**NOTE**: This standard is intended to cover both intentional and non-intentional radiators. If the equipment complies with the requirements in another relevant standard, e.g. EN 62479 covering low power equipment, then the requirements of this standard (IEC 62311) are considered to be met and the application of this standard to that equipment is not necessary.



Page 7 of 17

#### 3.2 TEST LIMIT

According to EN 62311:2020, Assessment of electronic and electrical equipment related to human exposure restrictions for electromagnetic fields (0 Hz - 300 GHz).

#### Annex F Measurement of E and H field

A commonly used probe size is 100 cm<sup>2</sup>, also the contribution of the three axes X, Y and Z can be evaluated separately.

Reference levels for electric, magnetic and electromagnetic fields (0 Hz to 300 GHz, unperturbed rms values)

Frequency range	E-field strength (V/m)	H-field strength (A/m)	B-field (μΤ)	Equivalent plane wave power density S <sub>eq</sub> (W/m²)	
0-1 Hz	_	3,2 × 10 <sup>4</sup>	4 × 10 <sup>4</sup>	_	
1-8 Hz	10 000	$3,2 \times 10^4/f^2$	$4 \times 10^4/f^2$	3 <u></u> 3	
8-25 Hz	10 000	4 000/f	5 000/f	_	
0,025-0,8 kHz	250/f	4/f	5/f	_	
0,8-3 kHz	250/f	5	6,25	_	
3-150 kHz	87	5	6,25	<u></u>	
0,15-1 MHz	87	0,73/f	0,92/f	_	
1-10 MHz	87/f <sup>1/2</sup>	0,73/f	0,92/f	_	
10-400 MHz	28	0,073	0,092	2	
400-2 000 MHz	1,375 f <sup>1/2</sup>	0,0037 f <sup>1/2</sup>	0,0046 f <sup>1/2</sup>	f/200	
2-300 GHz	61	0,16	0,20	10	




Page 8 of 17

#### 3.3 EVALUATION METHODS

#### Measurement of E and H field

A commonly used probe size is 100 cm<sup>2</sup>, also the contribution of the three axes X, Y and Z can be evaluated separately.

For Portable:

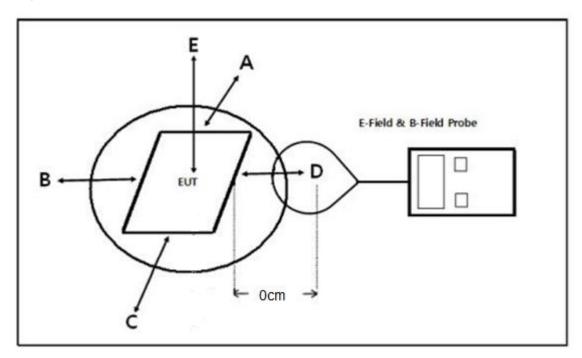


Note: Position A: Front of EUT; Position B: Left of EUT; Position C: back of EUT; Position D: Right of EUT; Position E: Top of EUT

The measurement probe was placed at test distance (0cm) which is between the edge and center of probe Based on the above standard limit, any device with output power below 5A/m cannot produce an exposure exceeding this restriction under the most pessimistic exposure conditions.



Page 9 of 17

#### For Mobile:

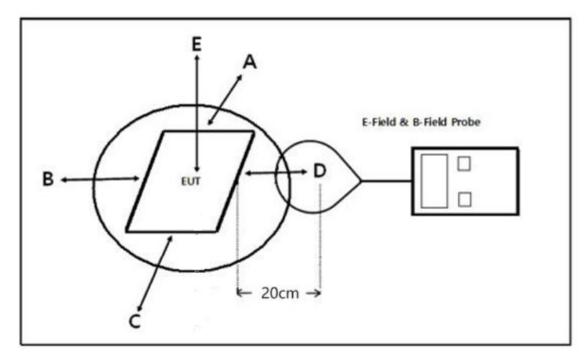

Note: Position A: Front of EUT; Position B: Left of EUT; Position C: back of EUT; Position D: Right of EUT; Position E: Top of EUT

The measurement probe was placed at test distance (20cm) which is between the edge and center of probe Based on the above standard limit, any device with output power below 5A/m cannot produce an exposure exceeding this restriction under the most pessimistic exposure conditions.



Page 10 of 17

## 4. TEST EQUIPMENT LIST

Description	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Broadband Field	Narda Safety Test	ELT-400	J-0004	Jun. 06, 2024	Jun. 05, 2025
Meter	Solutions GmbH	EL1-400	J-0004	Juli. 00, 2024	Juli. 03, 2023
Probe FHP	Narda Safety Test	2200/00 40	J-0015	Jun. 06, 2024	Jun. 05, 2025
	Solutions GmbH	2300/90.10			

#### 5. EUT OPERATION CONDITION

NO.	TEST MODE DESCRIPTION				
1	AC/DC Adapter + EUT + Wireless load(15W)				
2	AC/DC Adapter + EUT + Wireless load(10W)				
3	AC/DC Adapter + EUT + Wireless load(7.5W)				
4	AC/DC Adapter + EUT + Wireless load(5W)				
5	AC/DC Adapter + EUT + Wireless load(Null load)				
6	Wireless load(15W)				
7	Wireless load(10W)				
8	Wireless load(7.5W)				
9	Wireless load(5W)				
10	Wireless load(Null load)				
11	Wireless load(5W)+ type-c output: 5V2A				

Note:

The EUT supports 15W, 10W, 7.5W, 5W "wireless output, and all modes have been tested at full load, half load and null load, only the worst mode is reflected in the report.



Page 11 of 17

#### 4. TEST RESULT

#### Mobile

Frequency	Maximum Radiated H-Field at 20cm		Limit	Result
MHz	A/m		A/m	Pass/Fail
149.2kHz	position E	0.059	5	Pass
	position A	0.042		
	position B	0.041		
	position C	0.045		
	position D	0.046		

Since Radiated H-Field at worse case is 0.059A/m which cannot exceed the exempt condition, 5A/m. It is deemed to full fit the requirement of RF exposure basic restriction specified in EC Council Recommendation (1999/519/EC).

#### **Portable**

1 OI table				
Frequency	Maximum Radiated H-Field at 0cm		Limit	Result
MHz	A/m		A/m	Pass/Fail
149.2kHz	position F	0.061	5	Pass
	position E	0.049		
	position A	0.047		
	position B	0.048		
	position C	0.046		
	position D	0.047		

Since Radiated H-Field at worse case is 0.061A/m which cannot exceed the exempt condition, 5A/m. It is deemed to full fit the requirement of RF exposure basic restriction specified in EC Council Recommendation (1999/519/EC).

### 5. CONCLUSION


Remark: EUT meets the basic requirements in the standard.




Page 12 of 17

## **APPENDIX I: PHOTOGRAPHS OF TEST SETUP**

For Frequency: (Mobile) WPT Equipment\_ Position E

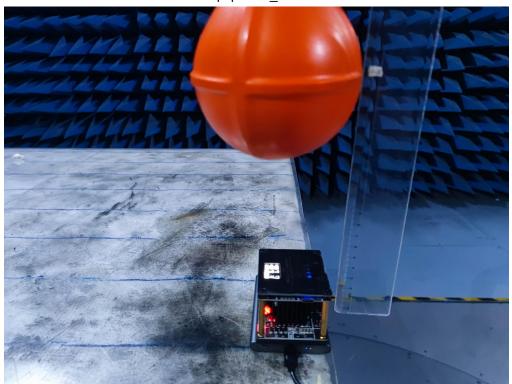

WPT Equipment Position A

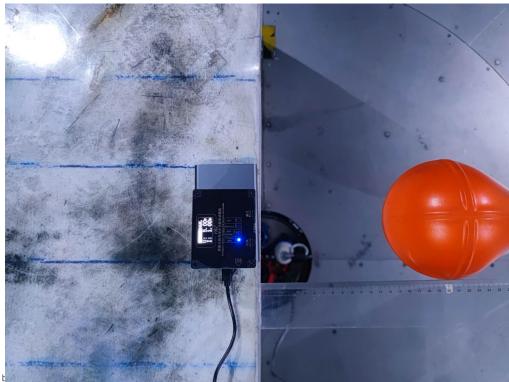

Any report having not b Testing/Inspection


Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Web: http://www.agccert.com/



Page 13 of 17

## WPT Equipment\_ Position B

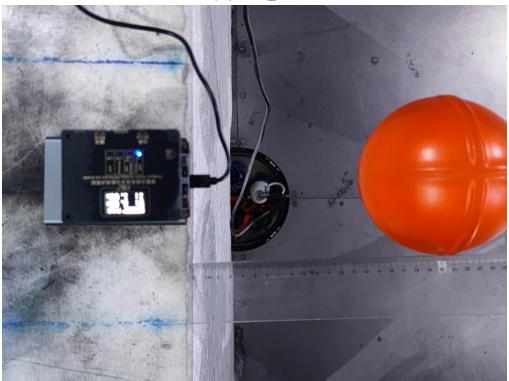



WPT Equipment\_ Position C





Page 14 of 17




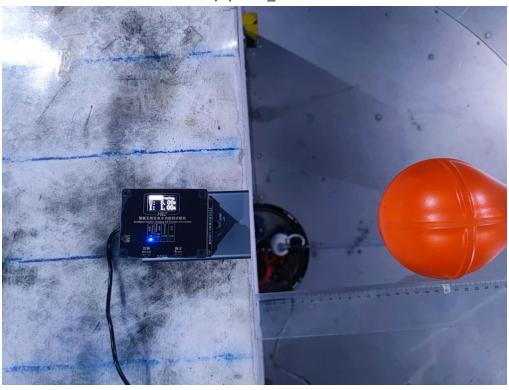




Page 15 of 17

# For Frequency: (Portable) WPT Equipment\_ Position E

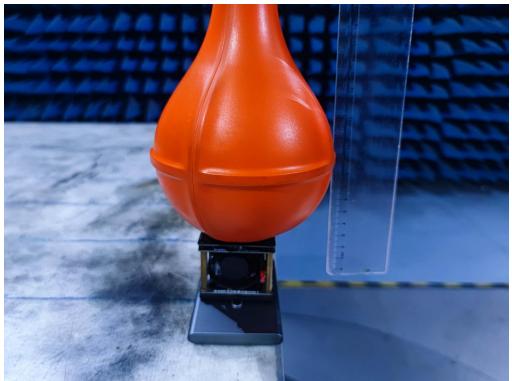


WPT Equipment\_ Position A

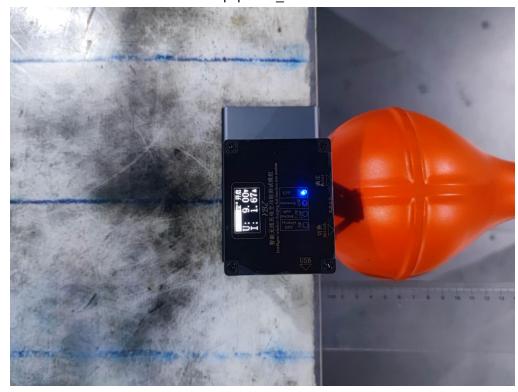





Page 16 of 17

## WPT Equipment\_ Position B

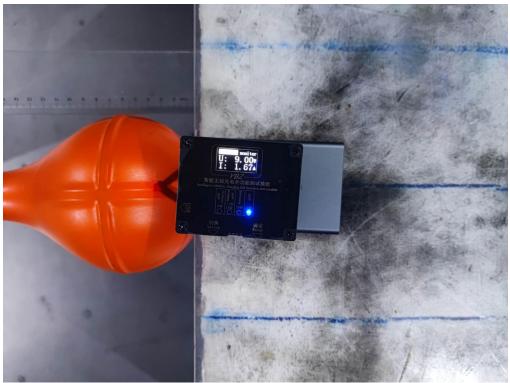


WPT Equipment\_ Position C

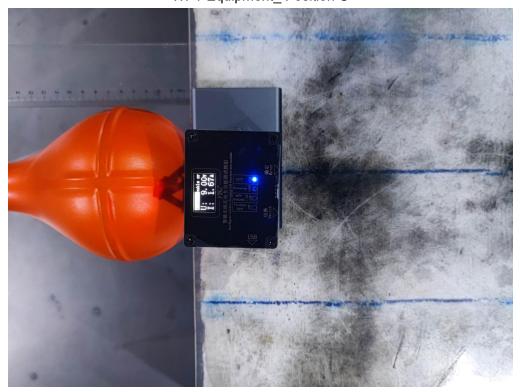






WPT Equipment\_ Position D

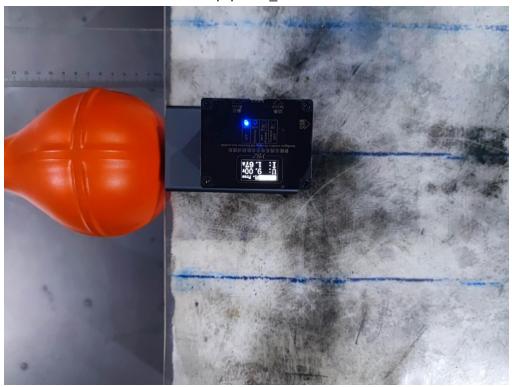

WPT Equipment\_ Position F

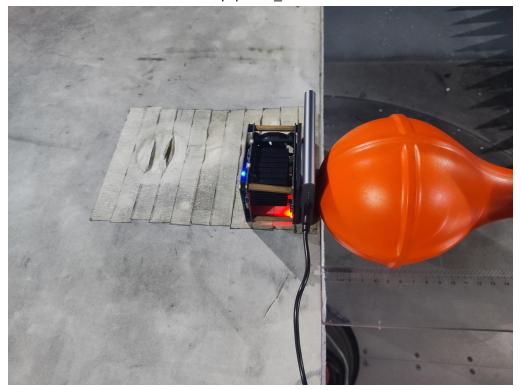



## Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.