



TEST REPORT

Reference No:	WTF25F03055322J
Applicant:	Mid Ocean Brands B.V.
Address	7/F., Kings Tower, 111 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong
Manufacturer:	118833
Address:	Titel mitter white white with with and the terms
Product Name:	Waterproof speaker
Model No:	MO6642
Test specification	IEC 60529:1989+A1:1999+A2:2013
Date of Receipt sample :	2025-04-11
Date of Test:	2025-04-14 to 2025-04-15

Date of Issue..... : 2025-04-16

Test Report Form No......: WST-60529-60D

Test Result.....: Pass

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:

Waltek Testing Group (Foshan) Co., Ltd.

Address: No.13-19, 2/F., 2nd Building, Sunlink Machinery City, Xingye 4 Road, Guanglong Industrial Park, Chihua Neighborhood Committee, Chencun, Shunde District, Foshan, Guangdong, China Tel:+86-757-23811398 Fax:+86-757-23811381 E-mail:info@waltek.com.cn

Tested by:	Approved by:	
yarvin [Jerry Mu	
Garvin Li	Jerry Mu	



Reference No.: WTF25F03055322J

Page 2 of 7



List of test items:

Result
Pass
Whitek Whitek Whitek whi
nt result with the applicable rtainty ("simple





Test Item:

Tests for protection against ingress moisture: IPX7

Test Method:

The tests should be carried out under the standard atmospheric condition. The atmospheric conditions during tests are as follows:

Temperature range: 15 °C to 35 °C. Relative humidity: 25 % to 75 %.

The tests are conducted with fresh water.

The test is made by completely immersing the enclosure in water in its service position as specified by the manufacturer so that the following conditions are satisfied:

- —the lowest point of enclosures with a height less than 850 mm is located 1 000 mm below the surface of the water:
- —the highest point of enclosures with a height equal to or greater than 850 mm is located 150 mm below the surface of the water;
 - -the duration of the test is 30 min;
- —the water temperature does not differ from that of the equipment by more than 5 K. However, a modified requirement may be specified in the relevant product standard if the tests are to be made when the equipment is energized and / or its parts in motion.

Acceptance Conditions:

After testing in accordance with the appropriate requirements, the enclosure shall be inspected for ingress of water.

It is the responsibility of the relevant Technical Committee to specify the amount of water which may be allowed to enter the enclosure and the details of a dielectric strength test, if any.

In general, if any water has entered, it shall not:

- ■be sufficient to interfere with the correct operation of the equipment or impair safety;
- ■deposit on insulation parts where it could lead to tracking along the creepage distances;
- ■reach live parts or windings not designed to operate when wet;
- ■accumulate near the cable end or enter the cable if any.

If the enclosure is provided with drain-holes, it should be proved by inspection that any water which enters does not accumulate and that it drains away without doing any harm to the equipment.

For enclosures without drain-holes, the relevant product standard shall specify the acceptance conditions if water can accumulate to reach live parts.

est Result	The same	
⊠ Pass	☐ Fail	

Photo Documentation: Model: MO6642



Photo 1



Photo 2



Photo 3



Photo 4





Photo 5

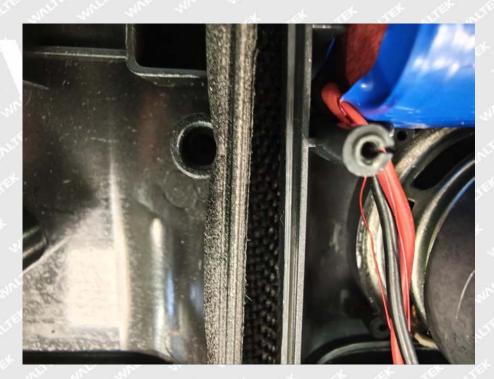


Photo 6

Equipment Used during Test:

Equipment	Model/Type	Cal. Date
Ipx1-8 water-proof UL test equipment	KXT1318	2024-07-02
Measure Tape	3m	2025-01-13
Clock	HS-70W	2025-01-11

===== End of Report =====

