



中国认可
国际互认
检测
TESTING
CNAS L4062



TEST REPORT

Reference No..... : WTF22X06110286W003
Manufacturer..... : Mid Ocean Brands B.V.
Address..... : 7/F., Kings Tower, 111 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong
Factory..... : 114768
Product Name..... : Wireless charger penholder
Model No..... : MO6679
Standards..... : ETSI EN 301 489-1 V2.2.3 (2019-11)
ETSI EN 301 489-3 V2.1.1 (2019-03)
Date of Receipt sample..... : 2022-06-01
Date of Test..... : 2022-06-01 to 2022-08-23
Date of Issue..... : 2022-08-23
Test Report Form No..... : WTX_ETSI EN 301 489_1_2019W
Test Result..... : Pass

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,

Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:

Jack Huang

Jack Huang

Approved by:

Silin Chen

Silin Chen



TABLE OF CONTENTS

1. GENERAL INFORMATION.....	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	5
1.2 TEST STANDARDS.....	6
1.3 TEST METHODOLOGY.....	6
1.4 TEST FACILITY	6
1.5 EUT SETUP AND OPERATION MODE	7
1.6 PERFORMANCE CRITERIA FOR EMS	8
1.7 MEASUREMENT UNCERTAINTY	9
1.8 TEST EQUIPMENT LIST AND DETAILS	10
2. SUMMARY OF TEST RESULTS	12
3. CONDUCTED EMISSIONS	13
3.1 TEST PROCEDURE.....	13
3.2 BASIC TEST SETUP BLOCK DIAGRAM.....	13
3.3 ENVIRONMENTAL CONDITIONS	13
3.4 CONDUCTED EMISSIONS TEST DATA.....	13
4. RADIATED EMISSIONS.....	20
4.2 TEST PROCEDURE.....	20
4.2 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	20
4.3 ENVIRONMENTAL CONDITIONS	21
4.4 SUMMARY OF TEST RESULTS/PLOTS	21
5. HARMONIC CURRENT EMISSIONS	27
5.1 TEST PROCEDURE	27
5.2 TEST SETUP BLOCK DIAGRAM.....	27
5.3 TEST STANDARDS	27
5.4 ENVIRONMENTAL CONDITIONS.....	27
5.5 HARMONIC CURRENT EMISSIONS TEST DATA.....	27
6. VOLTAGE FLUCTUATION AND FLICKER	33
6.1 TEST PROCEDURE	33
6.2 TEST SETUP BLOCK DIAGRAM.....	33
6.3 TEST STANDARDS	33
6.4 ENVIRONMENTAL CONDITIONS.....	33
6.5 VOLTAGE FLUCTUATION AND FLICKER TEST DATA.....	33
7. ELECTROSTATIC DISCHARGE (ESD)	35
7.1 TEST PROCEDURE	35
7.2 TEST SETUP BLOCK DIAGRAM.....	35
7.3 TEST PERFORMANCE	35
7.4 ENVIRONMENTAL CONDITIONS.....	35
7.5 ELECTROSTATIC DISCHARGE IMMUNITY TEST DATA	35
8. RADIO FREQUENCY ELECTROMAGNETIC FIELD (R/S)	37
8.1 TEST PROCEDURE	37
8.2 TEST SETUP BLOCK DIAGRAM.....	37
8.3 TEST PERFORMANCE	37
8.4 ENVIRONMENTAL CONDITIONS.....	37
8.5 CONTINUOUS RADIATED DISTURBANCES TEST DATA.....	37
9. FAST TRANSIENTS, COMMON MODE (EFT)	39
9.1 TEST PROCEDURE	39
9.2 TEST SETUP BLOCK DIAGRAM.....	39
9.3 TEST PERFORMANCE	39
9.4 ENVIRONMENTAL CONDITIONS.....	39
9.5 ELECTRICAL FAST TRANSIENTS TEST DATA	39
10. SURGES	41
10.1 TEST PROCEDURE	41



Reference No.: WTF22X06110286W003

10.2 TEST SETUP BLOCK DIAGRAM.....	41
10.3 TEST PERFORMANCE	41
10.4 ENVIRONMENTAL CONDITIONS.....	41
10.5 SURGE TEST DATA.....	41
11. RADIO FREQUENCY, COMMON MODE (C/S)	43
11.1 TEST PROCEDURE	43
11.2 TEST SETUP BLOCK DIAGRAM.....	43
11.3 TEST PERFORMANCE	43
11.4 ENVIRONMENTAL CONDITIONS.....	43
11.5 CONTINUOUS CONDUCTED DISTURBANCES TEST DATA	43
12. VOLTAGE DIPS AND INTERRUPTIONS.....	45
12.1 TEST PROCEDURE.....	45
12.2 TEST SETUP BLOCK DIAGRAM.....	45
12.3 TEST PERFORMANCE	45
12.4 ENVIRONMENTAL CONDITIONS.....	45
12.5 VOLTAGE DIPS AND INTERRUPTIONS TEST DATA	45
EXHIBIT 1 - EUT PHOTOGRAPHS.....	46
EXHIBIT 2 - TEST SETUP PHOTOGRAPHS.....	47

WALTEK



Report version

Version No.	Date of issue	Description
Rev.00	2022-08-23	Original
/	/	/

WALTEK



1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT	
Product Name:	Wireless charger penholder
Trade Name:	/
Model No.:	MO6679
Adding Model(s):	/
Rate Power:	Input: 5V 2.1A, DC 9V 3A Output: DC 5V / 2A Wireless Output 15W Max
Software Version:	YM—W353 V0.1
Hardware Version:	V1
Note: The test data is gathered from a production sample, provided by the manufacturer.	

Technical Characteristics of EUT	
EN 303417	
Frequency Range:	105-205kHz
Radiated H-Field:	43.34dBuA/m(@3m)
Type of Antenna:	Coil Antenna
Note: The Antenna Gain is provided by the customer and can affect the validity of results.	



1.2 Test Standards

The tests were performed according to following standards:

ETSI EN 301 489-1 V2.2.3 (2019-11): Electromagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements; Harmonised Standard for Electromagnetic Compatibility.

ETSI EN 301 489-3 V2.1.1 (2019-03): Electromagnetic Compatibility (EMC) standard for radio equipment and services; Part 3: Specific conditions for Short-Range Devices (SRD) operating on frequencies between 9 kHz and 246 GHz; Harmonised Standard covering the essential requirements of article 3.1(b) of Directive 2014/53/EU.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product maybe which result in lowering the emission/immunity should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with the standard ETSI EN 301489-1, Electromagnetic compatibility and Radio spectrum Matters (ERM); Electromagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.



1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission/immunity level. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	Wireless Charging	Connect to the adapter; AC230V/50Hz for adapter; Wireless charging: output 5W
TM2	Wireless Charging	Connect to the adapter; AC230V/50Hz for adapter; Wireless charging: output 10W
TM3	Wireless Charging	Connect to the adapter; AC230V/50Hz for adapter; Wireless charging: output 15W
TM4	Wireless Charging	TT,CT for EMS testing

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
USB Cable	1.00	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
wireless charging tester	YBZ	YBZ wireless charging tester	/
Adapter	Xiaomi	MDY-08-ES	/



1.6 Performance Criteria for EMS

➤ EN 301 489-3, The performance criteria are:

In the table below:

- performance criterion A applies for immunity tests with phenomena of a continuous nature;
- performance criterion B applies for immunity tests with phenomena of a transient nature.

NOTE: Whether a phenomenon is considered transient, continuous or otherwise is indicated in the test procedures for the phenomenon in ETSI EN 301 489-1 [1], clause 9.

Table 2: Performance Requirements

Criterion	During test	After test
A	Operate as intended No loss of function No unintentional responses	Operate as intended No loss of function No degradation of performance No loss of stored data or user programmable functions
B	May show loss of function No unintentional responses	Operate as intended Lost function(s) shall be self-recoverable No degradation of performance No loss of stored data or user programmable functions

Where "operate as intended" or "no loss of function" is specified, the EUT shall demonstrate correct functioning as described in clause 5.

Where the EUT has more than one mode of operation (see clause 4.5.2), an unplanned transition from one mode to another is considered as an unintentional response. The EUT shall be tested in sufficient modes to confirm there are no such unintentional responses.



1.7 Measurement Uncertainty

Measurement uncertainty	
Parameter	Uncertainty
Uncertainty for Radiated Emission in 3m chamber	@30-200MHz $\pm 4.52\text{dB}$ @0.2-1GHz $\pm 5.56\text{dB}$ @1-6GHz $\pm 3.84\text{dB}$ @6-18GHz $\pm 3.92\text{dB}$
Uncertainty for Conducted Emission	@9-150kHz $\pm 3.74\text{dB}$ @0.15-30MHz $\pm 3.34\text{dB}$
Uncertainty for Harmonic test	3.26%
Uncertainty for Flicker test	4.76%
Uncertainty for RS test	21%, k=2
Uncertainty for CS test	29%, k=2
Uncertainty for ESD test	The immunity measurement system uncertainty is within standard requirement and is based on a standard uncertainty multiplied by a coverage factor k=2, providing a level of confidence of approximately 95%.
Uncertainty for EFT test	
Uncertainty for Surges test	
Uncertainty for Voltage Dips, Voltage Variations and Short Interruptions Test	
Uncertainty for PFMF test	



1.8 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal Date	Due Date
☒ Chamber A: Below 1GHz					
Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2022-03-22	2023-03-21
EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2022-03-22	2023-03-21
Amplifier	Agilent	8447F	3113A06717	2022-01-07	2023-01-06
Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-20	2023-03-19
Trilog Broadband Antenna	Schwarz beck	VULB9163	9163-333	2021-03-20	2023-03-19
☐ Chamber A: Above 1GHz					
Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2022-03-22	2023-03-21
Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2022-03-22	2023-03-21
EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2022-03-22	2023-03-21
Amplifier	C&D	PAP-1G18	2002	2022-03-22	2023-03-21
Horn Antenna	ETS	3117	00086197	2021-03-19	2023-03-18
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2021-04-27	2023-04-26
Pre-amplifier	Schwarz beck	BBV 9721	9721-031	2022-03-25	2023-03-24
☐ Chamber B:Below 1GHz					
Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2021-04-09	2023-04-08
Amplifier	Agilent	8447D	2944A10179	2022-03-22	2023-03-21
EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2022-03-25	2023-03-24
☐ Chamber C:Below 1GHz					
EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2022-01-07	2023-01-06
Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2021-05-28	2023-05-27
Amplifier	HP	8447F	2944A03869	2022-03-22	2023-03-21
☒ Conducted Room 1#					
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2022-03-22	2023-03-21
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2022-03-25	2023-03-24
AC LISN	Schwarz beck	NSLK8126	8126-224	2022-03-22	2023-03-21
8-WIRE LISN	Schwarz beck	8158	CAT3-8158-0059	2022-03-22	2023-03-21
8-WIRE LISN	Schwarz beck	8158	CAT5-8158-0117	2022-03-22	2023-03-21
☐ Conducted Room 2#					
EMI Test Receiver	Rohde & Schwarz	ESPI	10129	2022-03-22	2023-03-21
LISN	Rohde & Schwarz	ENV 216	100097	2022-03-22	2023-03-21
EMF					
VDH Test Head	AFJ	VDH 30	SC022Z	2022-03-25	2023-03-24
3 Loop Antenna					
Loop Antenna	ZHINAN	ZN30401	19037	2021-04-26	2023-04-25



Clamp					
Clamp	Luthi	MDS21	3809	2022-03-28	2023-03-27
PFMF					
PMF Generator	LIONCEL	PMF-801C-C	0171101	2022-03-22	2023-03-21
PMF Antenna	LIONCEL	PMF-801C-A	0180302	2022-03-22	2023-03-21
Instantaneous PMF Generator Module	LIONCEL	PMF-801C-T	0171001	2022-03-22	2023-03-21
H/F					
Digital Power Analyzer	California Instrument	CTS	72831	2022-03-22	2023-03-21
Power Source	California Instrument	5001IX-CTS-400	25965	2022-03-22	2023-03-21
ESD					
ESD Generator	LIONCEL	ESD-203B	0170901	2022-03-28	2023-03-27
EFT/SURGE/DIPS					
Transient 2000	EMC PARTNER	TRA2000	863	2022-03-22	2023-03-21
Couple Clamp	EMC PARTNER	CN-EFT1000	513	2022-03-22	2023-03-21
CS					
CONDUCTED IMMUNITY TEST SYSTEM	FRANKONIA	CIT-10/75	126B1247/2013	2022-01-07	2023-01-06
Attenuator	EMTEST	MA-5100/6BF2	1009	2022-03-22	2023-03-21
CDN	Luthi	L-801M2/M3	2665	2022-03-22	2023-03-21
CDN	LIONCEL	CDN-T8	0210401	2022-03-25	2023-03-24
EM Clamp	TESEQ	KEMZ801A	45028	2022-03-25	2023-03-24
RS					
Signal Generator	HP	8688B	3438A00604	2022-03-22	2023-03-21
Power Meter	KEITHLEY	3500	1162591	2022-03-22	2023-03-21
Power Meter	KEITHLEY	3500	1121428	2022-03-22	2023-03-21
RF Power Amplifier	MicoTop	MPA-80-1000-250	MPA1906239	2022-03-22	2023-03-21
RF Power Amplifier	MicoTop	MPA-80-6000-100	MPA1906238	2022-03-22	2023-03-21
Antenna	SCHWARZBECK	STLP 9129	9129 114	N/A	N/A
Power Meter	Agilent	E4419B	GB42420578	2022-03-22	2023-03-21

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing.



2. SUMMARY OF TEST RESULTS

Standards	Reference	Description of Test Item	Result
ETSI EN 301 489-1	8.2	Radiated Emissions	Pass
	8.3	Conducted Emissions for DC Power Port	N/A
	8.4	Conducted Emissions for AC Power Port	Pass
	8.5	Harmonic Current Emissions	Pass
	8.6	Voltage Fluctuations and Flicker	Pass
	8.7	Telecommunication Ports	N/A
	9.2	Radio Frequency Electromagnetic Field	Pass
	9.3	Electrostatic Discharge	Pass
	9.4	Fast Transients, Common Mode	Pass
	9.5	Radio Frequency, Common Mode	Pass
	9.6	Transient and Surges in the Vehicular Environment	N/A
	9.7	Voltage Dips and Interruptions	Pass
	9.8	Surges	Pass
Pass: The EUT complies with the essential requirements in the standard. Fail: The EUT does not comply with the essential requirements in the standard. N/A: Not applicable.			




3. Conducted Emissions

3.1 Test Procedure

Test is conducting under the description of EN55032 Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement.

3.2 Basic Test Setup Block Diagram

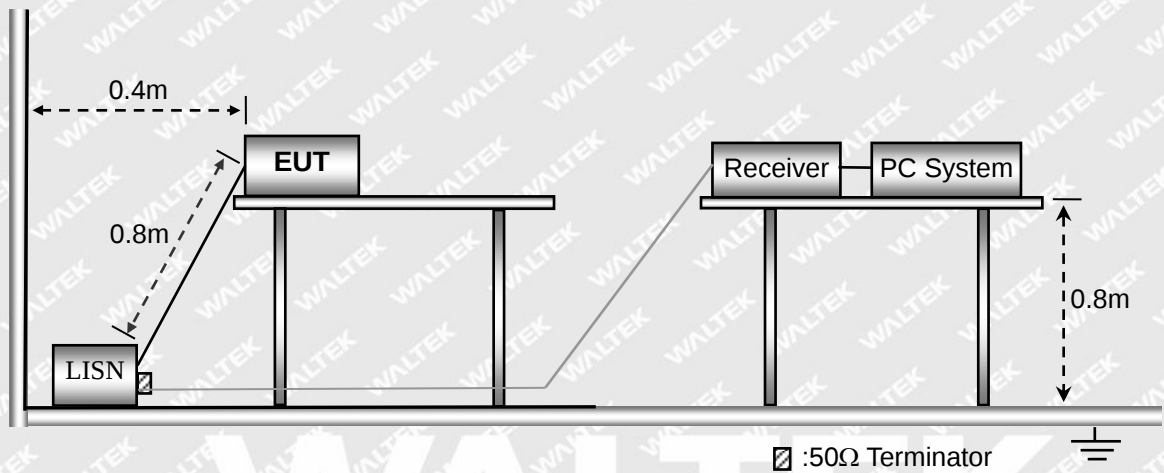

3.3 Environmental Conditions


Temperature:	23.5 ° C
Relative Humidity:	54 %
ATM Pressure:	1015 mbar

3.4 Conducted Emissions Test Data

Note: Only show the worst case in the test report.




Test mode:	TM1	Polarity:	Neutral
------------	-----	-----------	---------

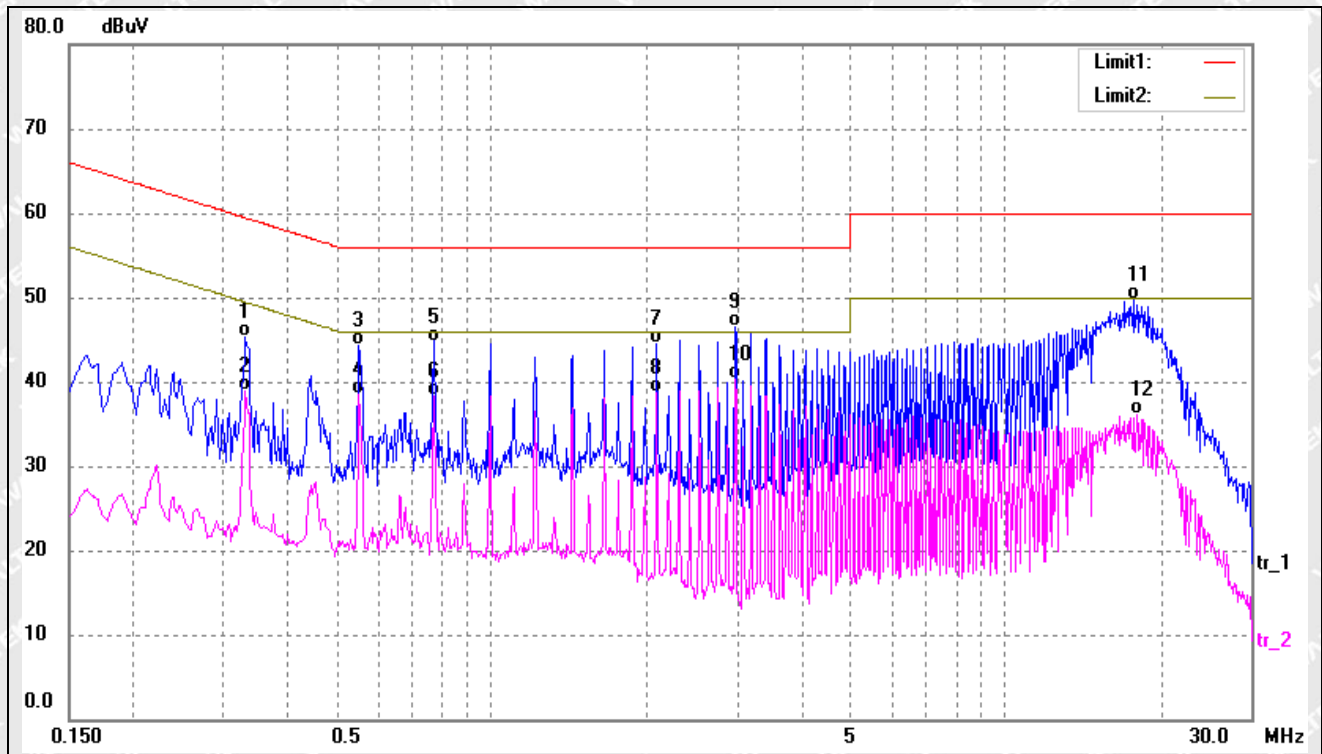

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3300	35.01	10.24	45.25	59.45	-14.20	QP
2	0.3300	28.59	10.24	38.83	49.45	-10.62	AVG
3	0.5500	34.12	10.21	44.33	56.00	-11.67	QP
4	0.5500	28.36	10.21	38.57	46.00	-7.43	AVG
5	0.7700	34.63	10.17	44.80	56.00	-11.20	QP
6	0.7700	28.06	10.17	38.23	46.00	-7.77	AVG
7	2.0940	34.17	10.25	44.42	56.00	-11.58	QP
8	2.0940	28.41	10.25	38.66	46.00	-7.34	AVG
9	2.9739	36.18	10.28	46.46	56.00	-9.54	QP
10*	2.9739	29.99	10.28	40.27	46.00	-5.73	AVG
11	17.7460	39.40	10.31	49.71	60.00	-10.29	QP
12	17.9540	25.72	10.32	36.04	50.00	-13.96	AVG




Test mode:	TM1	Polarity:	Line
------------	-----	-----------	------

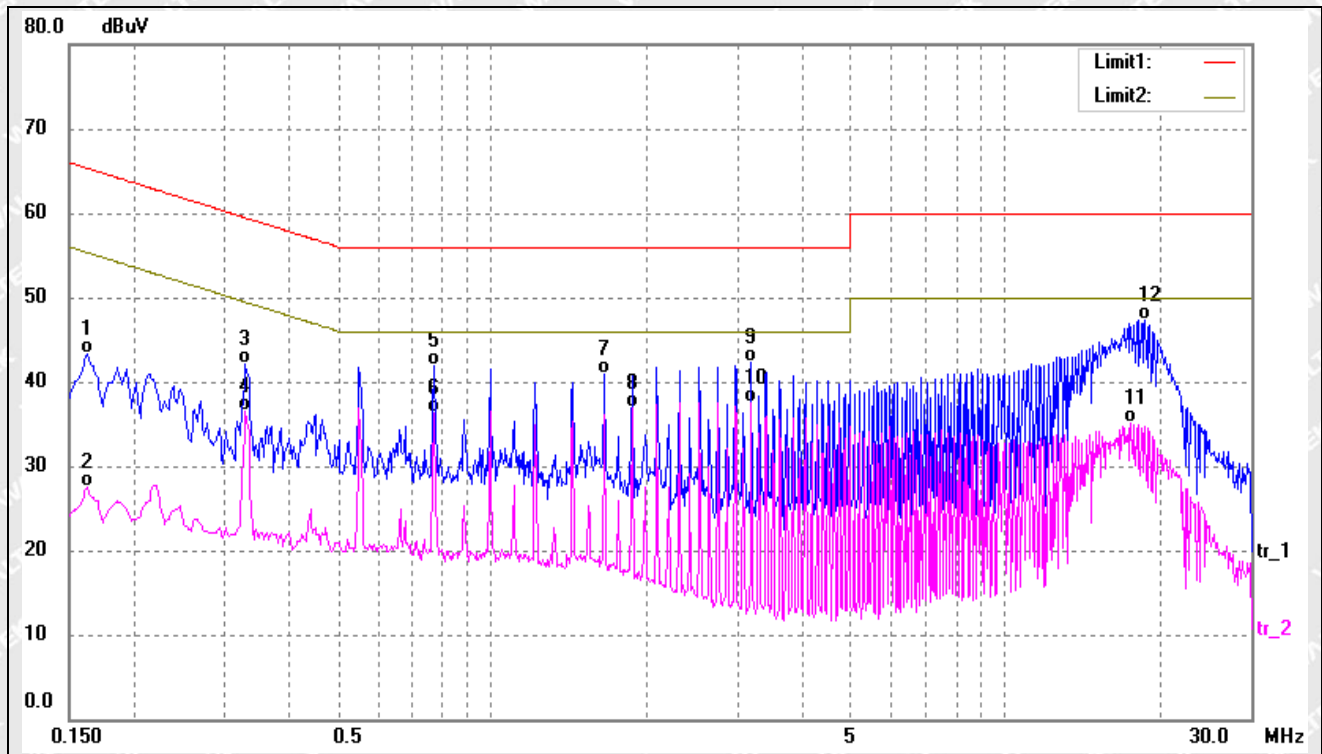

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1620	32.98	10.31	43.29	65.36	-22.07	QP
2	0.1620	17.14	10.31	27.45	55.36	-27.91	AVG
3	0.3300	31.95	10.24	42.19	59.45	-17.26	QP
4	0.3300	26.34	10.24	36.58	49.45	-12.87	AVG
5	0.7700	31.68	10.17	41.85	56.00	-14.15	QP
6	0.7700	26.10	10.17	36.27	46.00	-9.73	AVG
7	1.6540	30.59	10.22	40.81	56.00	-15.19	QP
8	1.8740	26.68	10.24	36.92	46.00	-9.08	AVG
9	3.1940	32.02	10.28	42.30	56.00	-13.70	QP
10*	3.1940	27.14	10.28	37.42	46.00	-8.58	AVG
11	17.5300	24.70	10.31	35.01	50.00	-14.99	AVG
12	18.6340	36.95	10.33	47.28	60.00	-12.72	QP




Test mode:	TM2	Polarity:	Neutral
------------	-----	-----------	---------

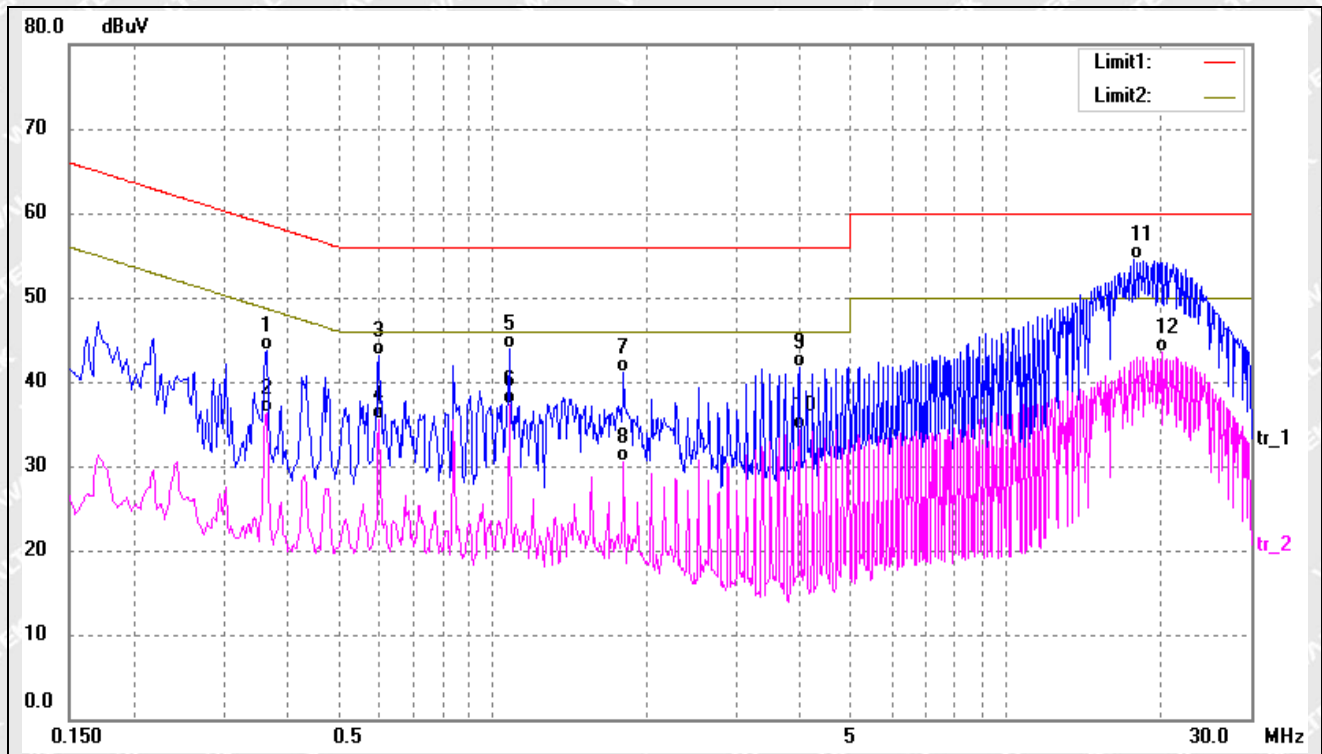

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3620	33.41	10.23	43.64	58.68	-15.04	QP
2	0.3620	26.13	10.23	36.36	48.68	-12.32	AVG
3	0.6020	32.88	10.21	43.09	56.00	-12.91	QP
4	0.6020	25.33	10.21	35.54	46.00	-10.46	AVG
5	1.0820	33.79	10.15	43.94	56.00	-12.06	QP
6	1.0820	27.16	10.15	37.31	46.00	-8.69	AVG
7	1.8020	30.89	10.23	41.12	56.00	-14.88	QP
8	1.8020	20.36	10.23	30.59	46.00	-15.41	AVG
9	3.9660	31.33	10.30	41.63	56.00	-14.37	QP
10	3.9660	23.94	10.30	34.24	46.00	-11.76	AVG
11*	17.7900	44.12	10.32	54.44	60.00	-5.56	QP
12	20.1940	33.10	10.37	43.47	50.00	-6.53	AVG




Test mode:	TM2	Polarity:	Line
------------	-----	-----------	------

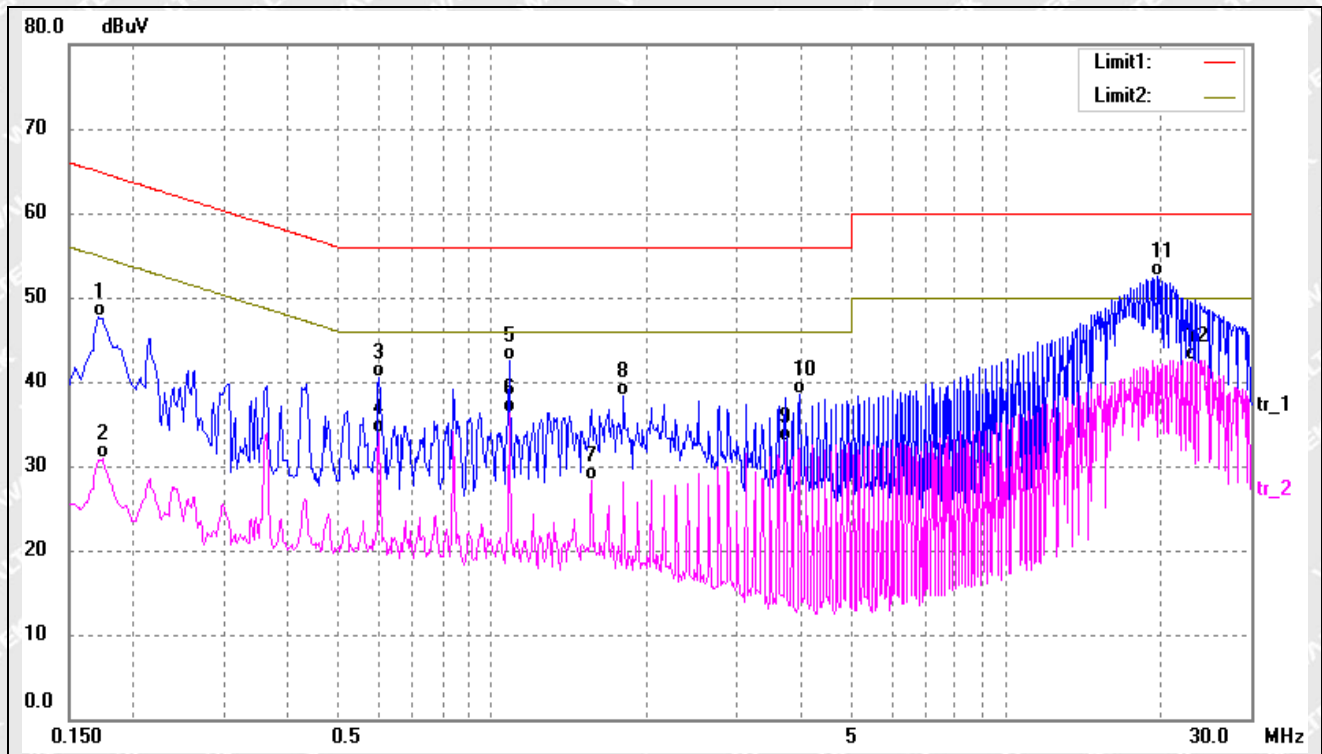

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1700	37.30	10.31	47.61	64.96	-17.35	QP
2	0.1740	20.53	10.30	30.83	54.76	-23.93	AVG
3	0.6020	30.38	10.21	40.59	56.00	-15.41	QP
4	0.6020	23.77	10.21	33.98	46.00	-12.02	AVG
5	1.0820	32.29	10.15	42.44	56.00	-13.56	QP
6	1.0820	26.22	10.15	36.37	46.00	-9.63	AVG
7	1.5620	18.18	10.21	28.39	46.00	-17.61	AVG
8	1.8020	28.01	10.23	38.24	56.00	-17.76	QP
9	3.7220	22.65	10.30	32.95	46.00	-13.05	AVG
10	3.9660	28.25	10.30	38.55	56.00	-17.45	QP
11	19.7099	42.09	10.36	52.45	60.00	-7.55	QP
12*	23.0740	32.21	10.38	42.59	50.00	-7.41	AVG




Test mode:	TM3	Polarity:	Neutral
------------	-----	-----------	---------

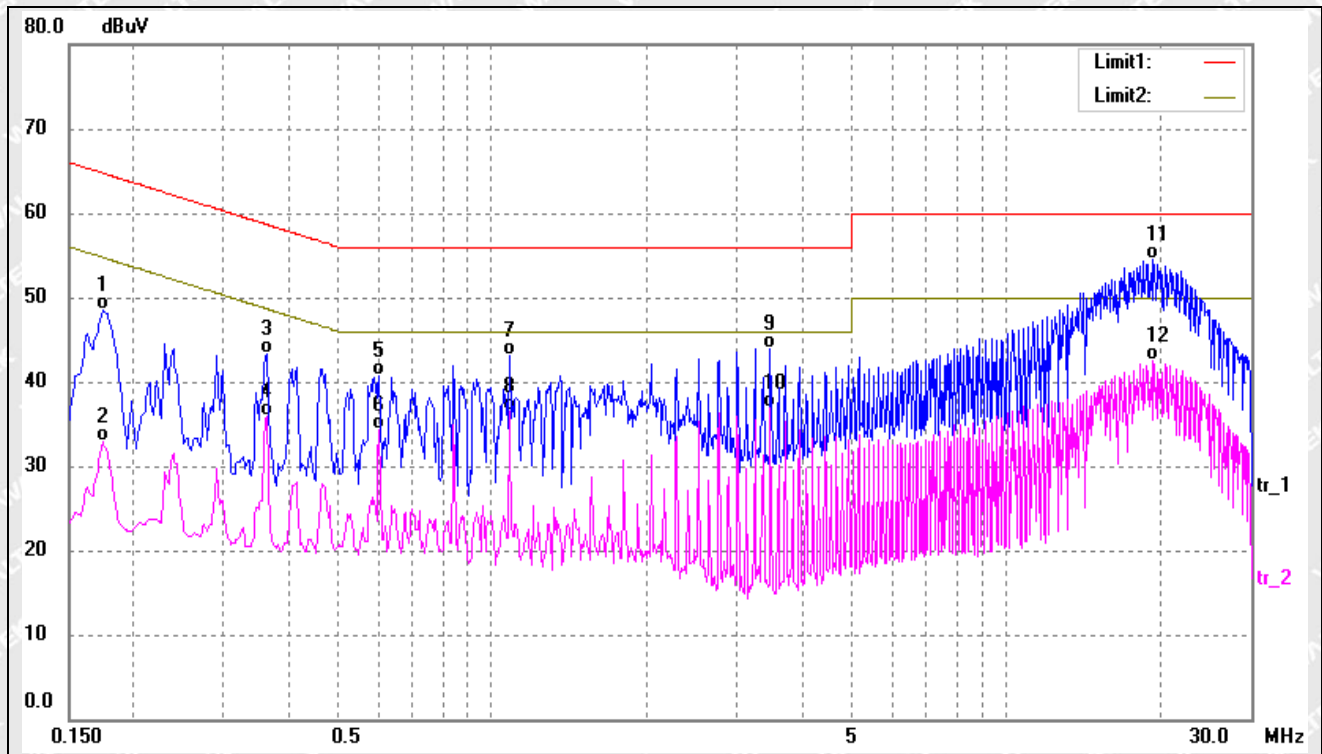

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1740	38.23	10.30	48.53	64.76	-16.23	QP
2	0.1740	22.67	10.30	32.97	54.76	-21.79	AVG
3	0.3620	33.00	10.23	43.23	58.68	-15.45	QP
4	0.3620	25.76	10.23	35.99	48.68	-12.69	AVG
5	0.6020	30.51	10.21	40.72	56.00	-15.28	QP
6	0.6020	24.05	10.21	34.26	46.00	-11.74	AVG
7	1.0820	32.98	10.15	43.13	56.00	-12.87	QP
8	1.0820	26.44	10.15	36.59	46.00	-9.41	AVG
9	3.4860	33.71	10.29	44.00	56.00	-12.00	QP
10	3.4860	26.69	10.29	36.98	46.00	-9.02	AVG
11*	19.2340	44.24	10.35	54.59	60.00	-5.41	QP
12	19.2340	32.14	10.35	42.49	50.00	-7.51	AVG



Test mode:	TM3	Polarity:	Line
------------	-----	-----------	------

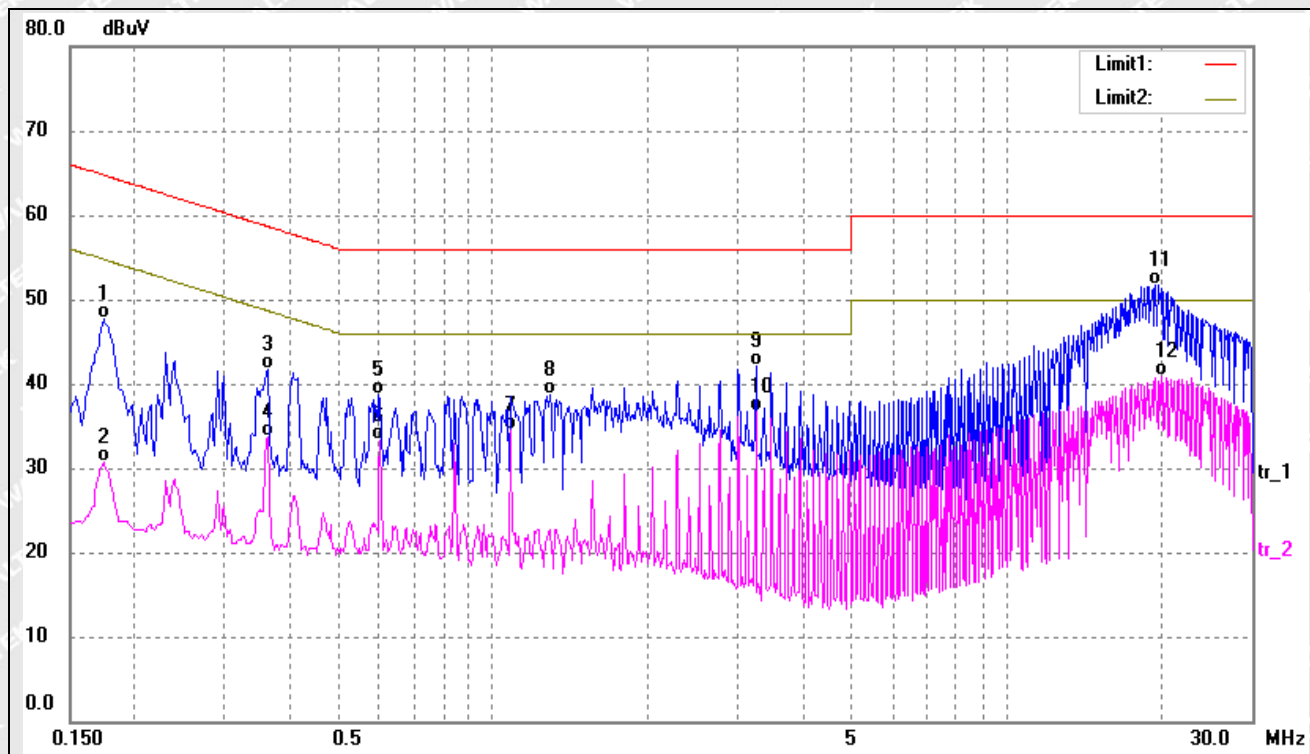


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1740	37.44	10.30	47.74	64.76	-17.02	QP
2	0.1740	20.33	10.30	30.63	54.76	-24.13	AVG
3	0.3620	31.42	10.23	41.65	58.68	-17.03	QP
4	0.3620	23.51	10.23	33.74	48.68	-14.94	AVG
5	0.5980	28.46	10.21	38.67	56.00	-17.33	QP
6	0.6020	23.10	10.21	33.31	46.00	-12.69	AVG
7	1.0820	24.29	10.15	34.44	46.00	-11.56	AVG
8	1.2900	28.49	10.17	38.66	56.00	-17.34	QP
9	3.2460	31.76	10.28	42.04	56.00	-13.96	QP
10	3.2460	26.49	10.28	36.77	46.00	-9.23	AVG
11*	19.4700	41.32	10.36	51.68	60.00	-8.32	QP
12	19.9500	30.47	10.37	40.84	50.00	-9.16	AVG



4. Radiated Emissions

4.2 Test Procedure

Test is conducting under the description of EN55032 Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement.

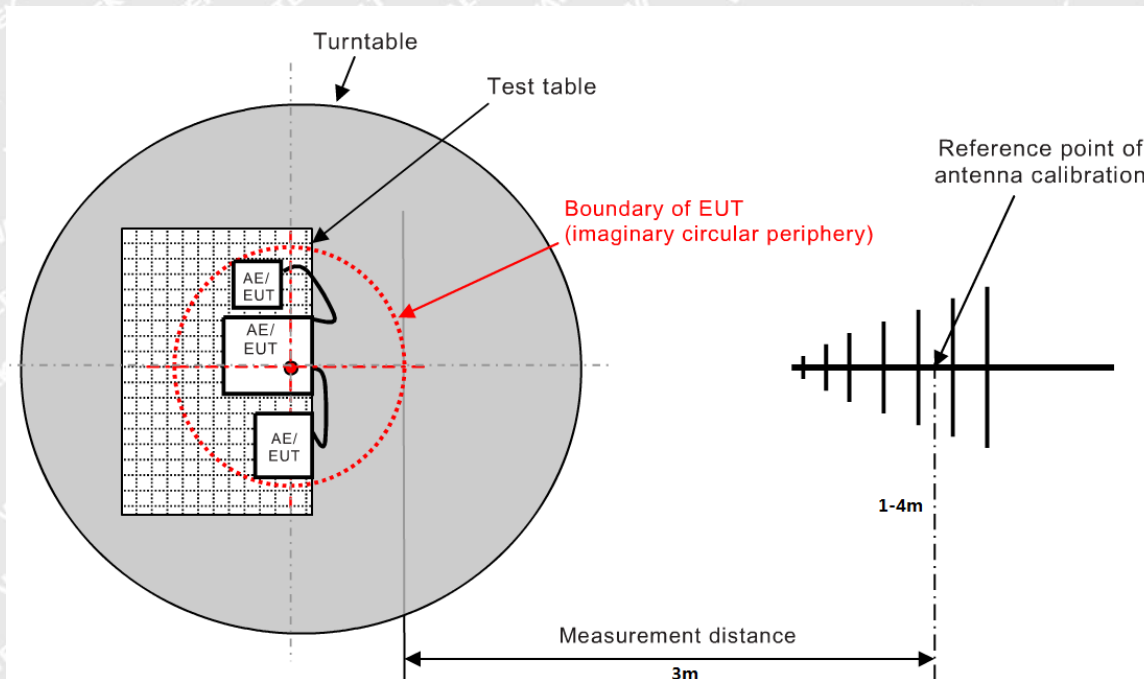

4.2 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dBμV means the emission is 6dBμV below the maximum limit for Class B device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{EN 301489 Class B Limit}$$



4.3 Environmental Conditions


Temperature:	22.5° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

4.4 Summary of Test Results/Plots

Note: Only show the worst case in the test report

➤ 30MHz to 1GHz


Test mode:	TM1	Polarity:	Horizontal
------------	-----	-----------	------------

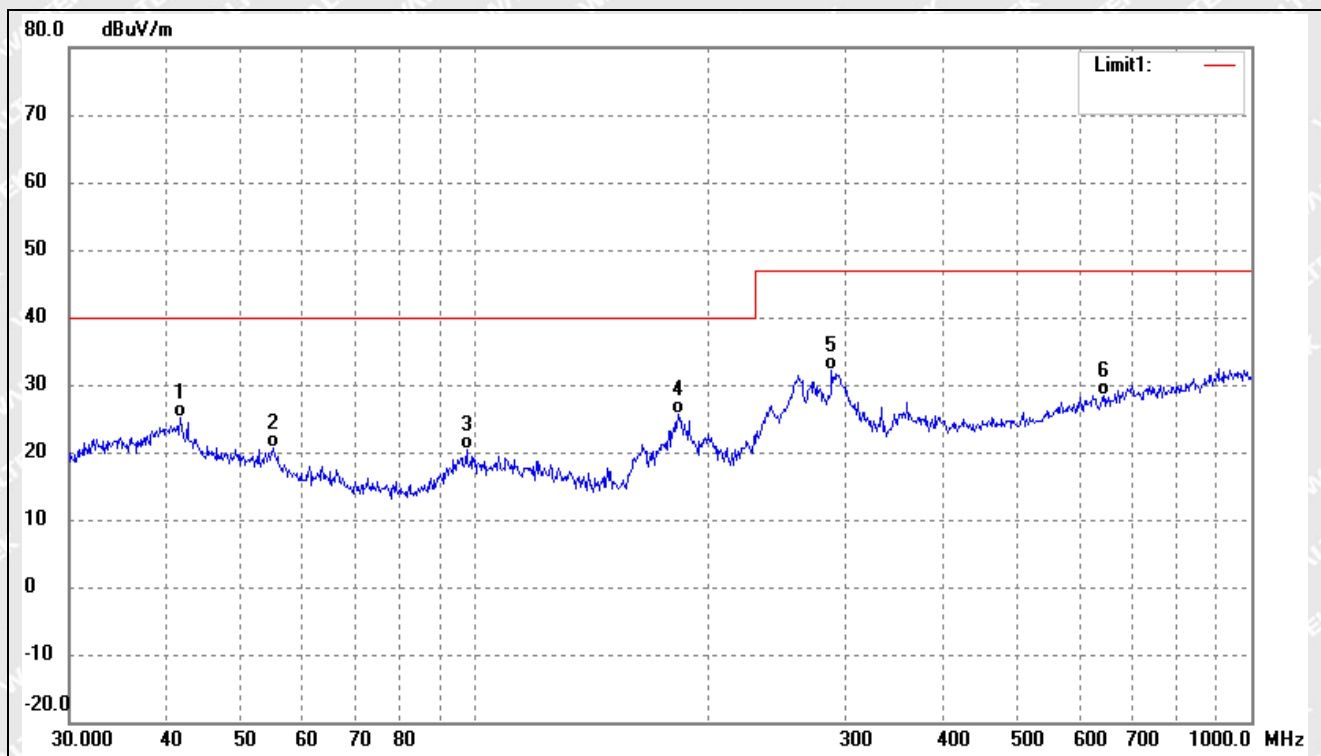

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	41.7129	32.90	-7.81	25.09	40.00	-14.91	-	-	QP
2	54.8348	29.42	-8.80	20.62	40.00	-19.38	-	-	QP
3	97.4560	29.62	-9.35	20.27	40.00	-19.73	-	-	QP
4	182.5592	35.94	-10.24	25.70	40.00	-14.30	-	-	QP
5	287.9904	37.84	-5.77	32.07	47.00	-14.93	-	-	QP
6	645.1195	28.07	0.35	28.42	47.00	-18.58	-	-	QP




Test mode:	TM1	Polarity:	Vertical
------------	-----	-----------	----------

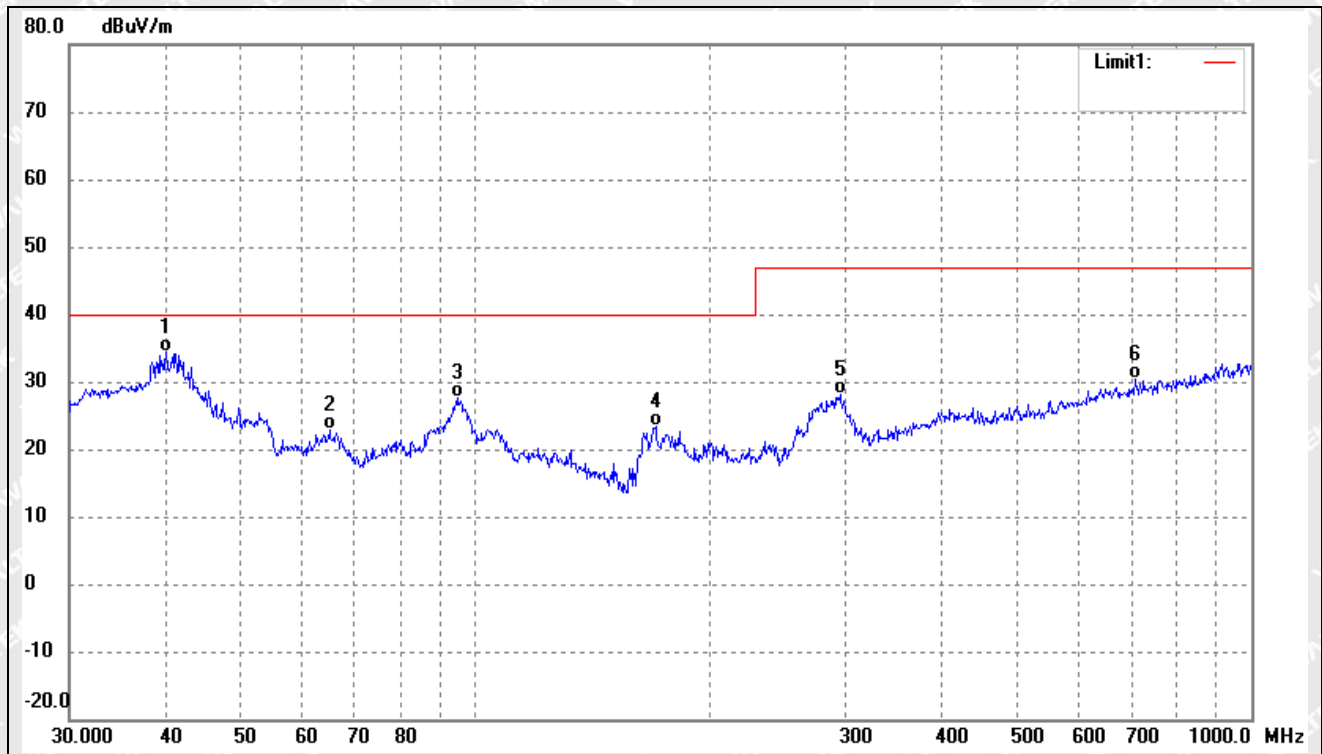

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	39.9942	42.07	-7.77	34.30	40.00	-5.70	-	-	QP
2	64.8865	33.57	-10.68	22.89	40.00	-17.11	-	-	QP
3	94.7601	37.71	-10.09	27.62	40.00	-12.38	-	-	QP
4	170.7926	34.52	-11.06	23.46	40.00	-16.54	-	-	QP
5	295.1469	33.62	-5.52	28.10	47.00	-18.90	-	-	QP
6	709.1823	29.14	1.22	30.36	47.00	-16.64	-	-	QP




Test mode:	TM2	Polarity:	Horizontal
------------	-----	-----------	------------

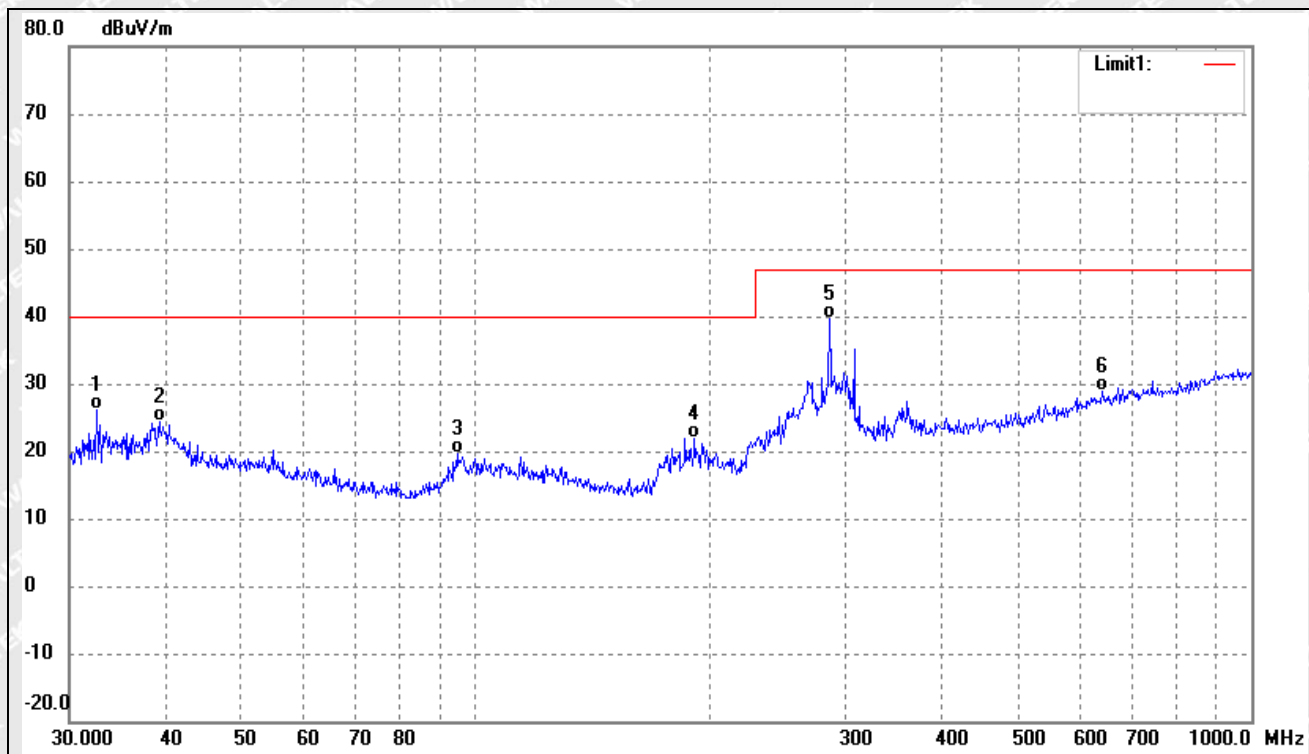

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	32.5198	35.58	-9.44	26.14	40.00	-13.86	-	-	QP
2	39.1616	32.25	-7.96	24.29	40.00	-15.71	-	-	QP
3	94.7601	29.75	-10.09	19.66	40.00	-20.34	-	-	QP
4	191.7450	31.12	-9.19	21.93	40.00	-18.07	-	-	QP
5	285.9778	45.51	-5.84	39.67	47.00	-7.33	-	-	QP
6	642.8613	28.65	0.31	28.96	47.00	-18.04	-	-	QP




Test mode:	TM2	Polarity:	Vertical
------------	-----	-----------	----------

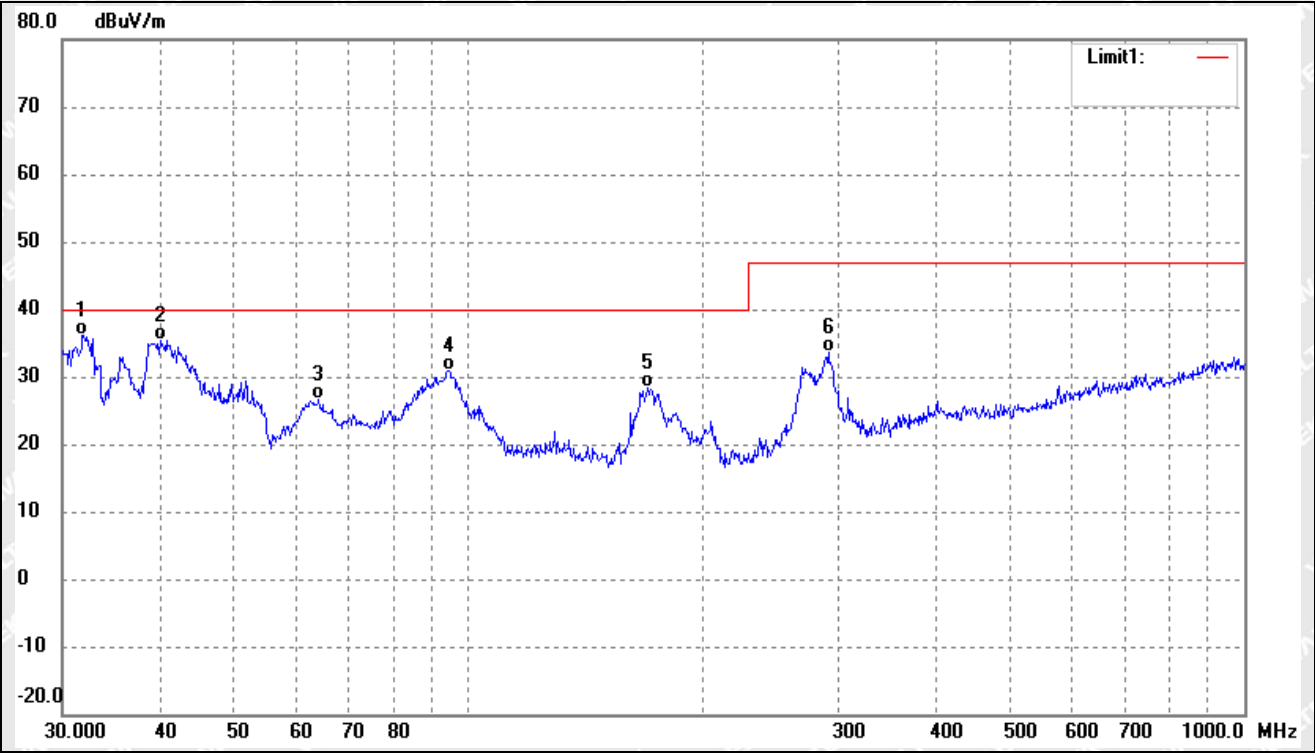

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	31.8427	45.67	-9.58	36.09	40.00	-3.91	-	-	QP
2	40.1347	43.24	-7.78	35.46	40.00	-4.54	-	-	QP
3	64.2074	37.05	-10.54	26.51	40.00	-13.49	-	-	QP
4	94.4283	41.18	-10.20	30.98	40.00	-9.02	-	-	QP
5	170.1947	39.36	-11.09	28.27	40.00	-11.73	-	-	QP
6	291.0360	39.18	-5.66	33.52	47.00	-13.48	-	-	QP




Test mode:	TM3	Polarity:	Horizontal
------------	-----	-----------	------------

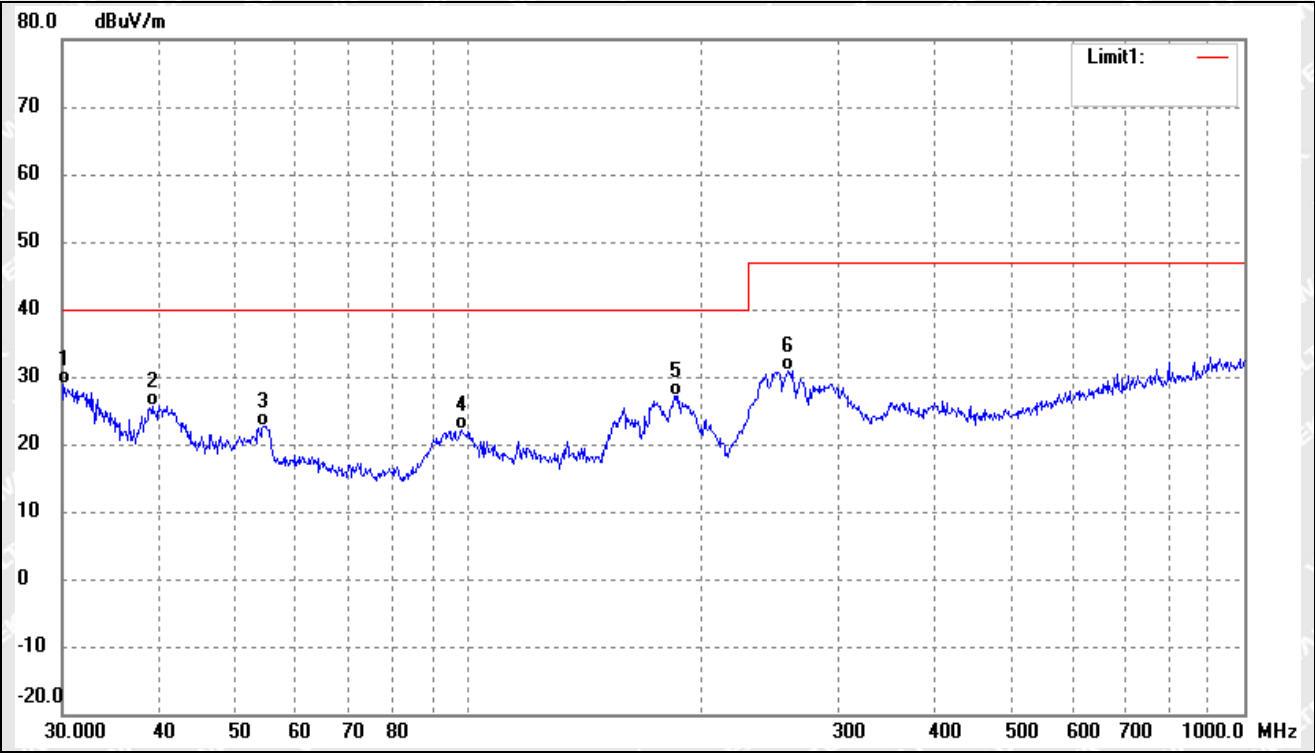

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	30.0000	38.81	-10.00	28.81	40.00	-11.19	-	-	QP
2	39.1616	33.68	-7.96	25.72	40.00	-14.28	-	-	QP
3	54.4516	31.47	-8.73	22.74	40.00	-17.26	-	-	QP
4	98.1419	31.38	-9.15	22.23	40.00	-17.77	-	-	QP
5	185.1379	36.92	-9.90	27.02	40.00	-12.98	-	-	QP
6	258.3264	37.71	-6.80	30.91	47.00	-16.09	-	-	QP



Test mode:	TM3	Polarity:	Vertical
------------	-----	-----------	----------

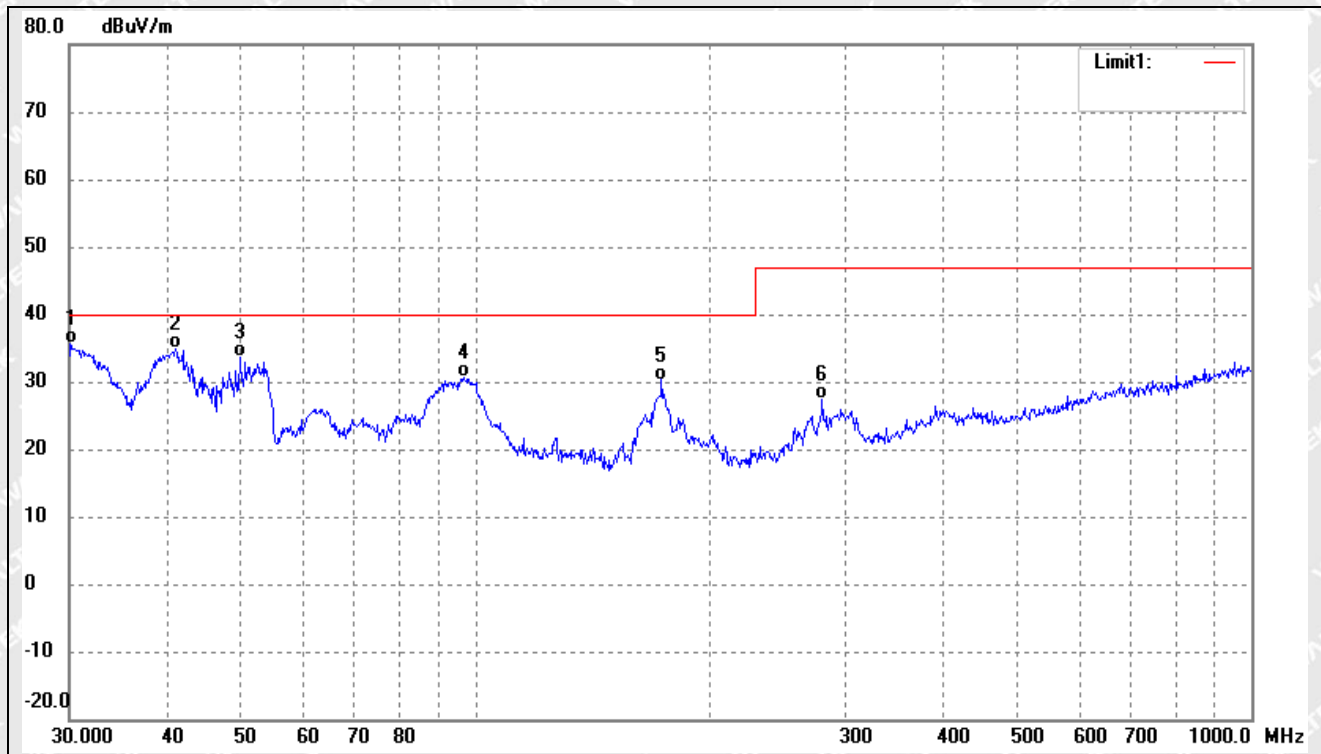


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	30.0000	45.51	-10.00	35.51	40.00	-4.49	-	-	QP
2	41.1320	42.62	-7.79	34.83	40.00	-5.17	-	-	QP
3	49.7068	41.69	-7.95	33.74	40.00	-6.26	-	-	QP
4	96.7749	40.18	-9.53	30.65	40.00	-9.35	-	-	QP
5	173.8135	41.15	-10.90	30.25	40.00	-9.75	-	-	QP
6	280.0237	33.37	-6.04	27.33	47.00	-19.67	-	-	QP

Remark: '-' Means the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

5.1 Test Procedure

5.2 Test Setup Block Diagram


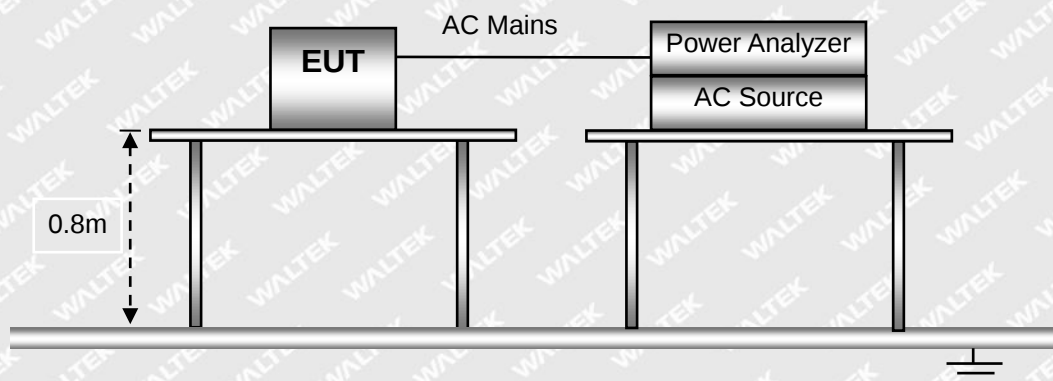


EN61000-3-2, Clause 7.1 Limits for Class A equipment.

5.4 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	50%
ATM Pressure:	1011 mbar

5.5 Harmonic Current Emissions Test Data

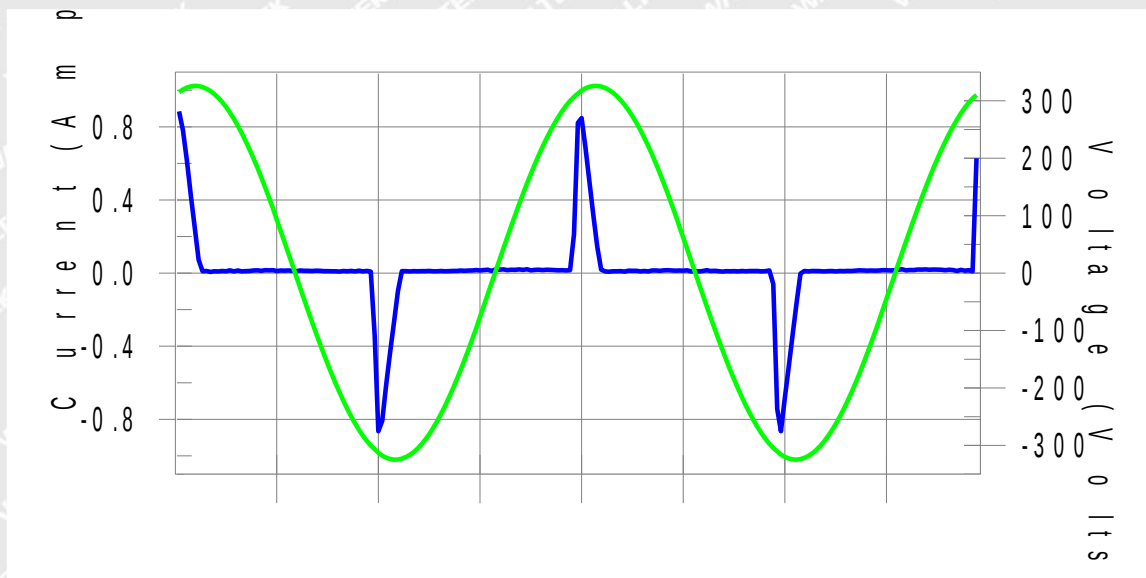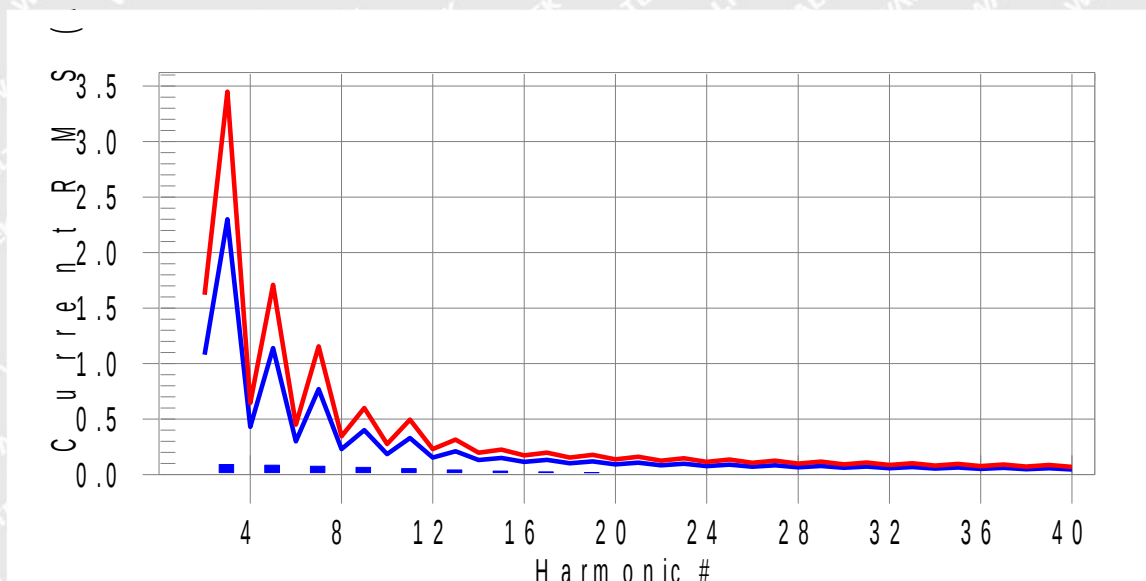**Harmonics – Class-A per IEC 61000-3-2:2018/AMD1:2020(Run time)****Test category: Class-A (European limits)****Test Margin: 100****Test date: 2022/8/19****Start time: 9:39:27****End time: 9:42:08****Test duration (min): 2.5****Data file name: H-000015.cts_data****Comment: Comments****Customer: Customer information****Test Result: Pass****Source qualification: Normal****Current & voltage waveforms****Harmonics and Class A limit line****European Limits****Test result: Pass Worst harmonics H15-14.6% of 150% limit, H15-21.4% of 100% limit**



Current Test Result Summary (Run time)

Test category: Class-A (European limits)

Test Margin: 100

Test date: 2022/8/19

Start time: 9:39:27

End time: 9:42:08

Test duration (min): 2.5

Data file name: H-000015.cts_data

Comment: Comments

Customer: Customer information

Test Result: Pass

Source qualification: Normal

THC(A): 0.182

I-THD(%): 189.8

POHC(A): 0.037

POHC Limit(A): 0.251

Highest parameter values during test:

V_RMS (Volts): 230.17

Frequency(Hz): 50.00

I_Peak (Amps): 0.925

I_RMS (Amps): 0.210

I_Fund (Amps): 0.096

Crest Factor: 4.474

Power (Watts): 21.7

Power Factor: 0.459

Harm#	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
2	0.001	1.080	N/A	0.001	1.620	N/A	Pass
3	0.091	2.300	3.9	0.092	3.450	2.7	Pass
4	0.001	0.430	N/A	0.001	0.645	N/A	Pass
5	0.084	1.140	7.4	0.085	1.710	5.0	Pass
6	0.000	0.300	N/A	0.001	0.450	N/A	Pass
7	0.076	0.770	9.8	0.076	1.155	6.6	Pass
8	0.000	0.230	N/A	0.001	0.345	N/A	Pass
9	0.065	0.400	16.2	0.066	0.600	11.0	Pass
10	0.000	0.184	N/A	0.001	0.276	N/A	Pass
11	0.054	0.330	16.2	0.054	0.495	11.0	Pass
12	0.000	0.153	N/A	0.001	0.230	N/A	Pass
13	0.042	0.210	20.1	0.043	0.315	13.6	Pass
14	0.000	0.131	N/A	0.001	0.197	N/A	Pass
15	0.032	0.150	21.4	0.033	0.225	14.6	Pass
16	0.000	0.115	N/A	0.001	0.173	N/A	Pass
17	0.024	0.132	18.1	0.025	0.198	12.5	Pass
18	0.000	0.102	N/A	0.001	0.153	N/A	Pass
19	0.019	0.118	15.8	0.020	0.178	11.0	Pass
20	0.000	0.092	N/A	0.001	0.138	N/A	Pass
21	0.016	0.107	15.2	0.017	0.161	10.6	Pass
22	0.000	0.084	N/A	0.001	0.125	N/A	Pass
23	0.016	0.098	15.9	0.016	0.147	11.0	Pass
24	0.000	0.077	N/A	0.001	0.115	N/A	Pass
25	0.015	0.090	16.7	0.016	0.135	11.6	Pass



Reference No.: WTF22X06110286W003

26	0.000	0.071	N/A	0.001	0.107	N/A	Pass
27	0.014	0.083	16.7	0.015	0.125	11.6	Pass
28	0.000	0.066	N/A	0.001	0.099	N/A	Pass
29	0.012	0.078	15.8	0.013	0.116	11.0	Pass
30	0.000	0.061	N/A	0.001	0.092	N/A	Pass
31	0.010	0.073	14.0	0.011	0.109	9.9	Pass
32	0.000	0.058	N/A	0.000	0.086	N/A	Pass
33	0.008	0.068	12.0	0.009	0.102	8.5	Pass
34	0.000	0.054	N/A	0.000	0.081	N/A	Pass
35	0.007	0.064	10.4	0.007	0.096	7.4	Pass
36	0.000	0.051	N/A	0.000	0.077	N/A	Pass
37	0.006	0.061	9.7	0.006	0.091	6.9	Pass
38	0.000	0.048	N/A	0.000	0.073	N/A	Pass
39	0.006	0.058	9.9	0.006	0.087	6.9	Pass
40	0.000	0.046	N/A	0.000	0.069	N/A	Pass

WALTEK



Voltage Source Verification Data (Run time)

Test category: Class-A (European limits)

Test Margin: 100

Test date: 2022/8/19

Start time: 9:39:27

End time: 9:42:08

Test duration (min): 2.5

Data file name: H-000015.cts_data

Comment: Comments

Customer: Customer information

Test Result: Pass

Source qualification: Normal

Highest parameter values during test:

Voltage (Vrms): 230.17

Frequency(Hz): 50.00

I_Peak (Amps): 0.925

I_RMS (Amps): 0.210

I_Fund (Amps): 0.096

Crest Factor: 4.474

Power (Watts): 21.7

Power Factor: 0.459

Harm#	Harmonics V-rms	Limit V-rms	% of Limit	Status
2	0.060	0.460	13.13	OK
3	0.522	2.071	25.21	OK
4	0.076	0.460	16.41	OK
5	0.063	0.920	6.84	OK
6	0.037	0.460	7.98	OK
7	0.045	0.690	6.59	OK
8	0.015	0.460	3.16	OK
9	0.039	0.460	8.41	OK
10	0.010	0.460	2.15	OK
11	0.045	0.230	19.51	OK
12	0.009	0.230	4.07	OK
13	0.034	0.230	14.64	OK
14	0.007	0.230	3.21	OK
15	0.036	0.230	15.72	OK
16	0.008	0.230	3.37	OK
17	0.023	0.230	9.81	OK
18	0.010	0.230	4.16	OK
19	0.023	0.230	9.85	OK
20	0.015	0.230	6.66	OK
21	0.019	0.230	8.22	OK
22	0.004	0.230	1.87	OK
23	0.020	0.230	8.50	OK
24	0.003	0.230	1.42	OK
25	0.021	0.230	9.03	OK
26	0.003	0.230	1.21	OK



Reference No.: WTF22X06110286W003

27	0.020	0.230	8.69	OK
28	0.003	0.230	1.35	OK
29	0.022	0.230	9.48	OK
30	0.004	0.230	1.57	OK
31	0.017	0.230	7.52	OK
32	0.002	0.230	0.99	OK
33	0.016	0.230	6.74	OK
34	0.002	0.230	0.73	OK
35	0.013	0.230	5.85	OK
36	0.002	0.230	1.08	OK
37	0.012	0.230	5.04	OK
38	0.002	0.230	0.90	OK
39	0.010	0.230	4.38	OK
40	0.007	0.230	3.21	OK

WALTEK




6. Voltage Fluctuation and Flicker

6.1 Test Procedure

Test is conducting under the description of EN 61000-3-3.

6.2 Test Setup Block Diagram

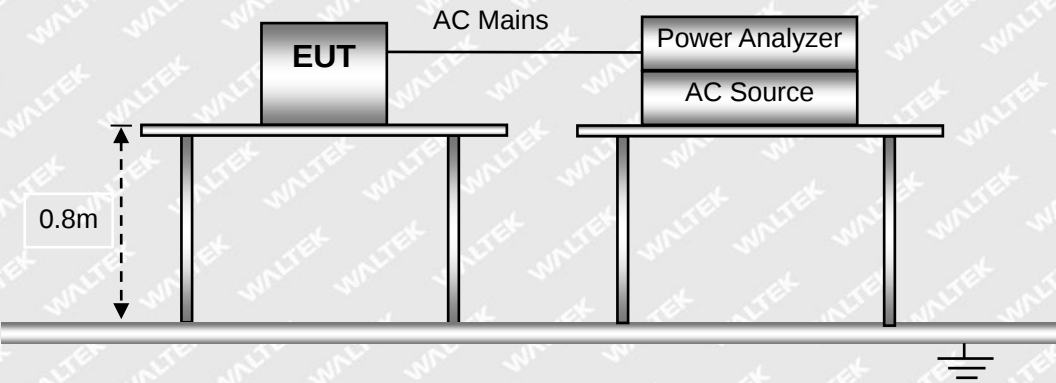

6.3 Test Standards

EN61000-3-3, Limit: Clause 5.

6.4 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	50%
ATM Pressure:	1011 mbar

6.5 Voltage Fluctuation and Flicker Test Data

Result: The EUT is compliance with the requirements of this section.




Test mode:	TM1
------------	-----

Test Result: Pass

Status: Test Completed

Pst and limit line

European Limits

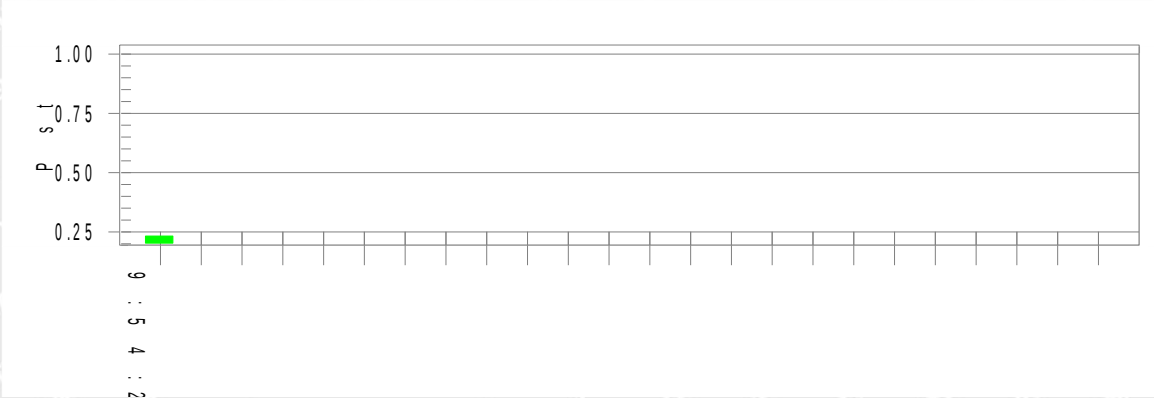

Plt and limit line



Parameter values recorded during the test:

Vrms at the end of test (Volt): 230.08

Highest dt (%):

T-max (mS): 0

Highest dc (%): 0.00

Highest dmax (%): 0.00

Highest Pst (10 min. period): 0.233

Highest Plt (2 hr. period): 0.102

Test limit (%):

Test limit (mS): 500.0 Pass

Test limit (%): 3.30 Pass

Test limit (%): 4.00 Pass

Test limit: 1.000 Pass

Test limit: 0.650 Pass




7. Electrostatic Discharge (ESD)

7.1 Test Procedure

Test is conducting under the description of EN 61000-4-2.

7.2 Test Setup Block Diagram

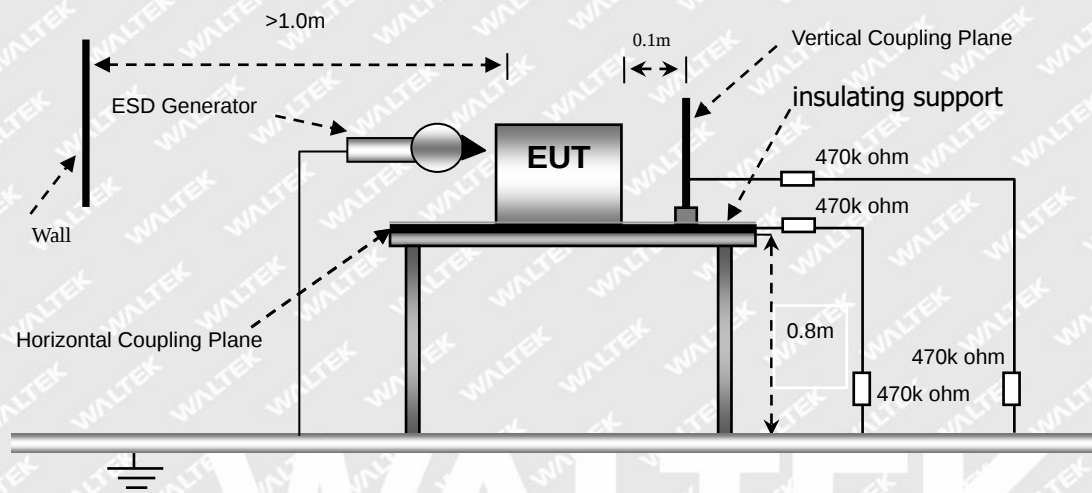

7.3 Test Performance

Performance Criterion:	Mode	Verdict
	TM1-TM4	B
Note: TM4 for TT,TR		

7.4 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	50%
ATM Pressure:	1011 mbar

7.5 Electrostatic Discharge Immunity Test Data



Test mode	TM1-TM4							
EN 61000-4-2 Test Points	Test Levels (kV)							
	-2	+2	-4	+4	-6	+6	-8	+8
Air Discharge								
Indicator Light	B	B	B	B	B	B	B	B
USB Port	B	B	B	B	B	B	B	B
Enclosure	B	B	B	B	B	B	B	B
Direct Contact Discharge								
USB Port	B	B	B	B	/	/	/	/
Enclosure	B	B	B	B	/	/	/	/
Indirect Contact Discharge								
HCP (6 Sides)	A	A	A	A	/	/	/	/
VCP (4 Sides)	A	A	A	A	/	/	/	/

Test Result: Pass

WALTEK




8. Radio Frequency Electromagnetic Field (R/S)

8.1 Test Procedure

Test is conducting under the description of EN 61000-4-3.

8.2 Test Setup Block Diagram

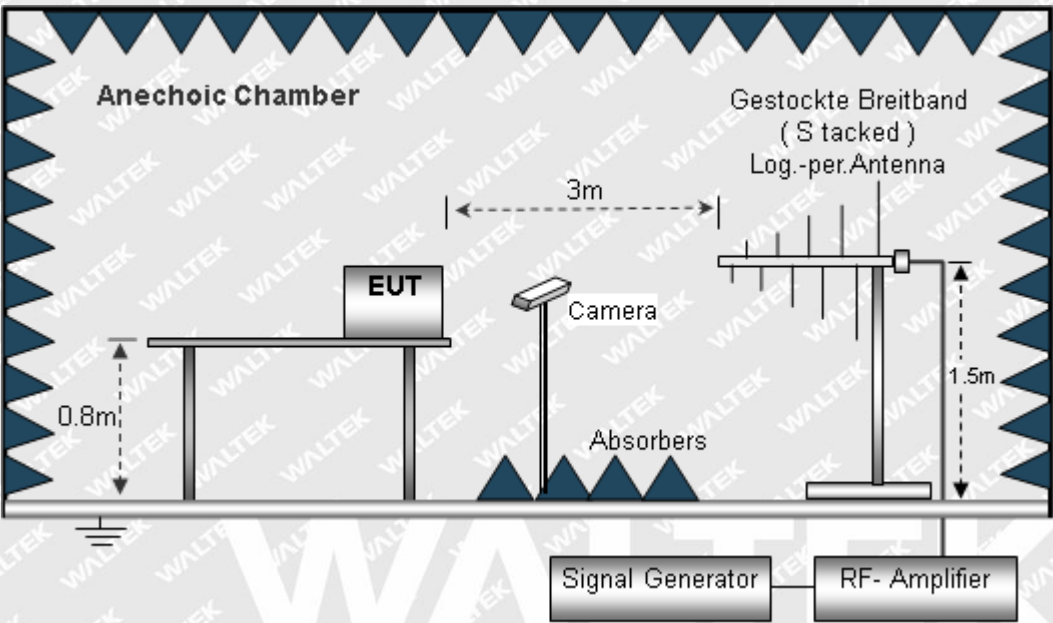

8.3 Test Performance

Performance Criterion:	Mode	Verdict
	TM1-TM4	A
Note: TM4 for CT,CR		

8.4 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	50%
ATM Pressure:	1011 mbar

8.5 Continuous Radiated Disturbances Test Data

Frequency step: 1% of fundamental
Dwell time: 1 second
Modulation: AM by 1kHz sine wave with 80% modulation depth



Test mode		TM1-TM4							
Frequency Range(MHz)	Field (V/m)	Front		Rear		Left Side		Right Side	
		VERT	HORI	VERT	HORI	VERT	HORI	VERT	HORI
80-1000	3	A	A	A	A	A	A	A	A
1000-3000	3	A	A	A	A	A	A	A	A
3000-6000	3	A	A	A	A	A	A	A	A

Test Result: Pass

WALTEK




9. Fast Transients, Common Mode (EFT)

9.1 Test Procedure


Test is conducting under the description of EN 61000-4-4.

9.2 Test Setup Block Diagram

For AC Mains or DC Ports:

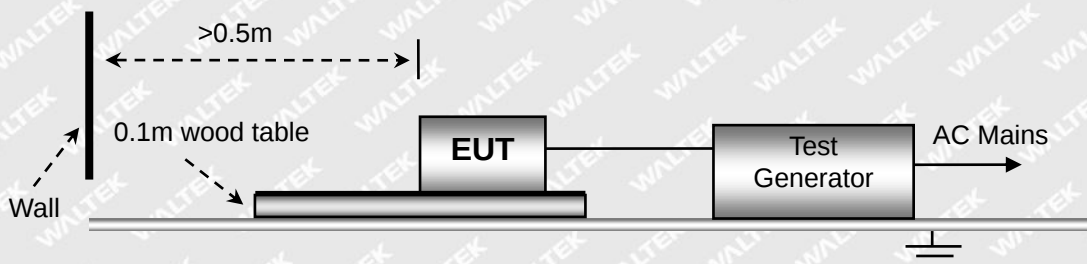

For Signal or Telecommunication Ports:

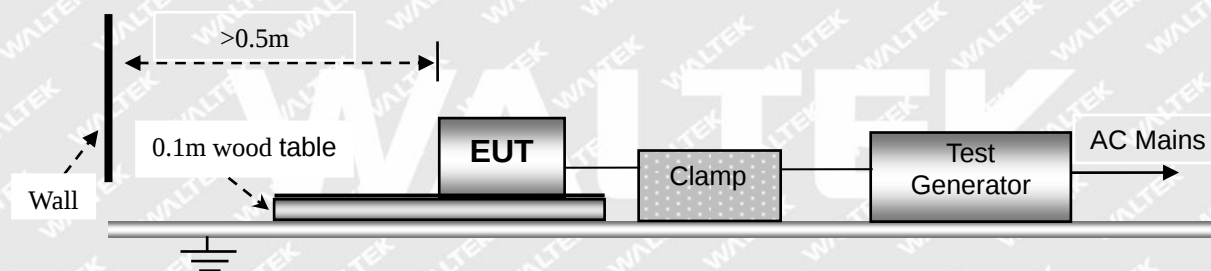

9.3 Test Performance

Performance Criterion:	Mode	Verdict
	TM1-TM4	B
Note: TM4 for TT,TR		

9.4 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	50%
ATM Pressure:	1011 mbar

9.5 Electrical Fast Transients Test Data



Test Mode		TM1-TM4							
EN 61000-4-4 Test Line		Test Levels (kV)							
		+0.5	-0.5	+1.0	-1.0	+2.0	-2.0	+4.0	-4.0
AC Main Power port	L	A	A	A	A	/	/	/	/
	N	A	A	A	A	/	/	/	/
	PE	/	/	/	/	/	/	/	/
	L-N	A	A	A	A	/	/	/	/
	L-PE	/	/	/	/	/	/	/	/
	N-PE	/	/	/	/	/	/	/	/
	L-N-PE	/	/	/	/	/	/	/	/
Signal ports	/	/	/	/	/	/	/	/	/

Test Result: Pass

WALTEK




10. Surges

10.1 Test Procedure


Test is conducting under the description of EN 61000-4-5.

10.2 Test Setup Block Diagram

For AC Mains or DC Ports:

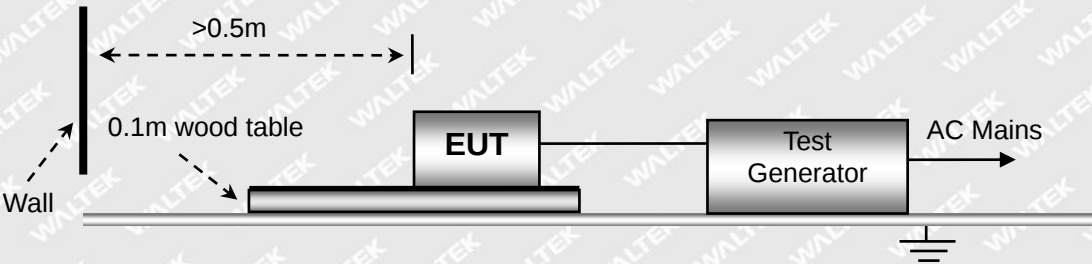

For Signal or Telecommunication Ports:

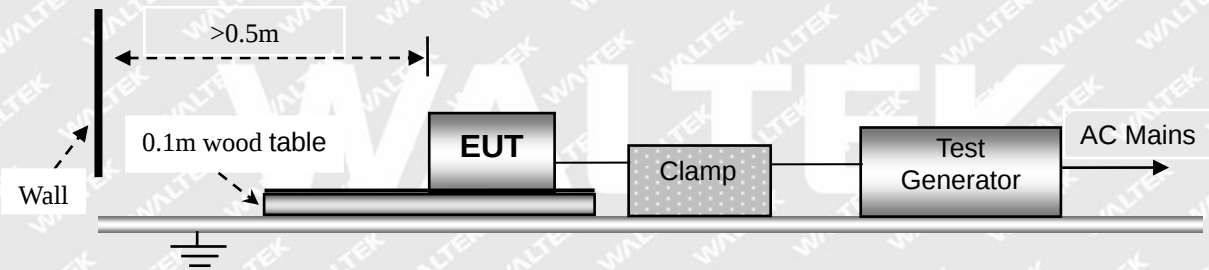

10.3 Test Performance

Performance Criterion:	Mode	Verdict
	TM1-TM4	
Note: TM4 for TT,TR		

10.4 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	50%
ATM Pressure:	1011 mbar

10.5 Surge Test Data



Test Mode	TM1-TM4			
Voltage	Poll	Path	Pass	Fail
0.5kV	±	L-N	A	/
1kV	±	L-N	A	/
2kV	±	L-N, L-PE, N-PE	/	/
4kV	±	L-N, L-PE, N-PE	/	/

Test Result: Pass

WALTEK




11. Radio Frequency, Common Mode (C/S)

11.1 Test Procedure


Test is conducting under the description of EN 61000-4-6.

11.2 Test Setup Block Diagram

For AC Mains or DC Input:

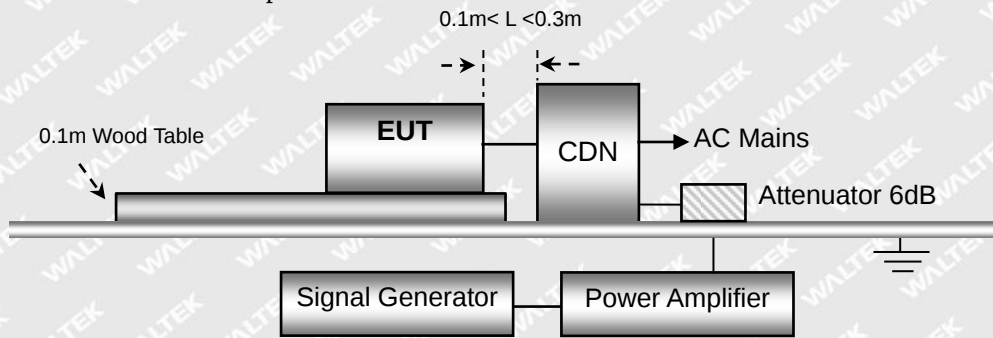

For Signal or Telecommunication Ports:

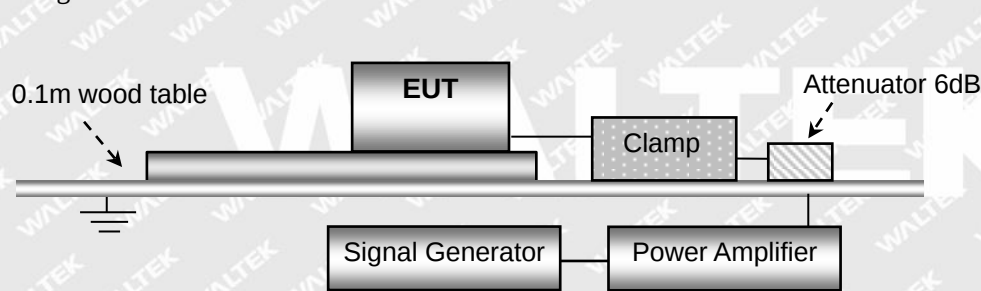

11.3 Test Performance

Performance Criterion:	Mode	Verdict
	TM1-TM4	A
Note: TM4 for CT,CR		

11.4 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	50%
ATM Pressure:	1011 mbar

11.5 Continuous Conducted Disturbances Test Data

Sweep frequency range: 150kHz~80MHz

Frequency step: 1% of fundamental

Dwell time: 1 second



Test Mode		TM1-TM4		
Level	Voltage (V) (rms, unmodulated)	Modulation:	Pass	Fail
1	1	AM 80%, 1kHz sinewave	/	/
2	3	AM 80%, 1kHz sinewave	A	/
3	10	AM 80%, 1kHz sinewave	/	/
X	Special	/	/	/

Test Result: Pass

WALTEK




12. Voltage Dips and Interruptions

12.1 Test Procedure

Test is conducting under the description of EN 61000-4-11.

12.2 Test Setup Block Diagram

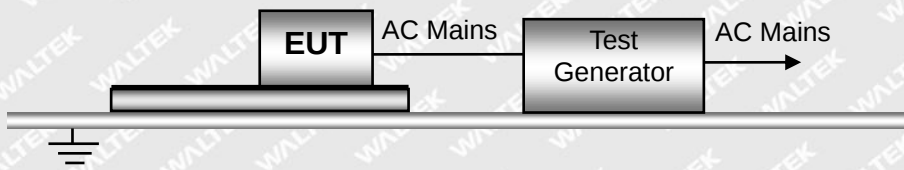

12.3 Test Performance

Performance Criterion:	Mode	Verdict
	TM1-TM4	B for voltage dip/ C for voltage interruption
Note: TM4 for TT,TR		

12.4 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	50%
ATM Pressure:	1011 mbar

12.5 Voltage Dips And Interruptions Test Data

U: Voltage dips in % U_T (U_T is rated voltage for the EUT)

T: Test duration

Level	U	T	Phase Angle	N	Pass	Fail
1	100%	10ms	0/90/180/270	3	A	/
2	100%	20ms	0/90/180/270	3	B	/
3	30%	500ms	0/90/180/270	3	B	/
4	100%	5000ms	0/90/180/270	3	B	/

Test Result: Pass



EXHIBIT 1 - EUT PHOTOGRAPHS


Please refer to “ANNEX”.

WALTEK




EXHIBIT 2 - TEST SETUP PHOTOGRAPHS

**Conducted Emission
Test Setup**

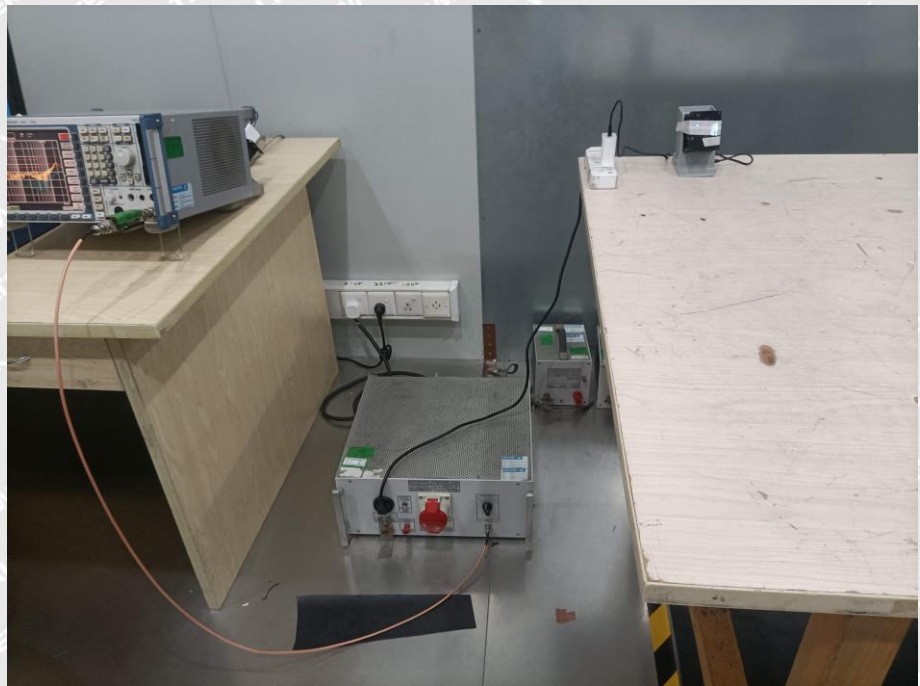


**Radiation Emission Test
View(30MHz to 1GHz)**

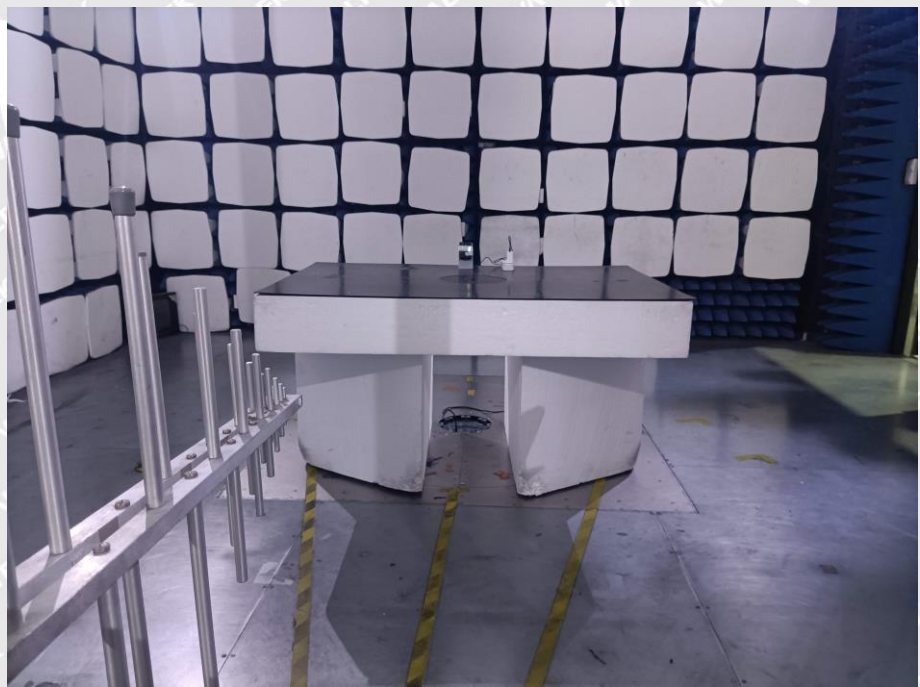



**Harmonic/Flicker Test
View**

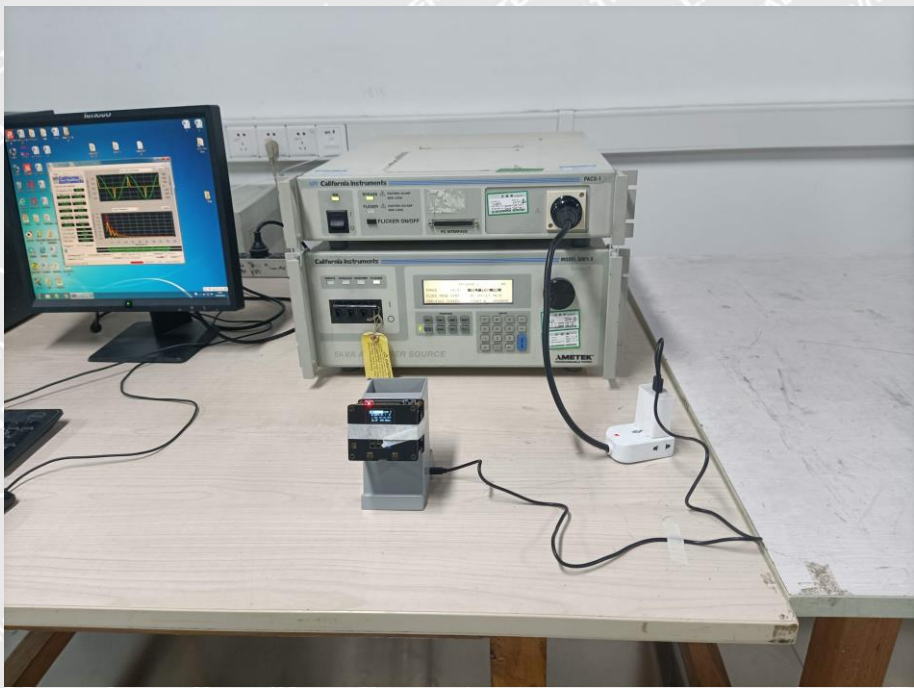


EN 61000-4-2 Test View






EN 61000-4-3 Test View

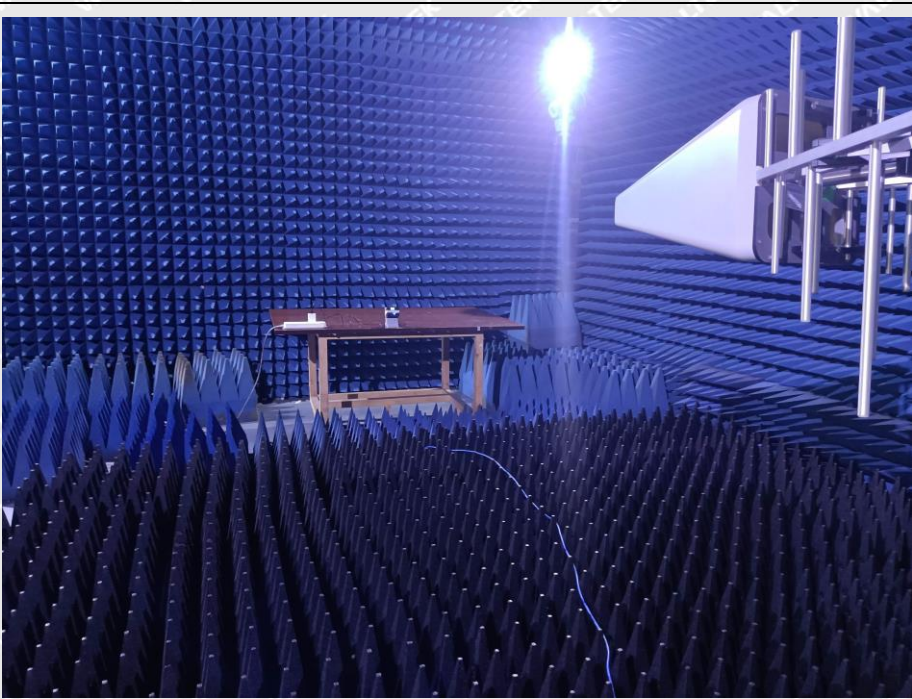


EN 61000-4-4/5/11 Test View

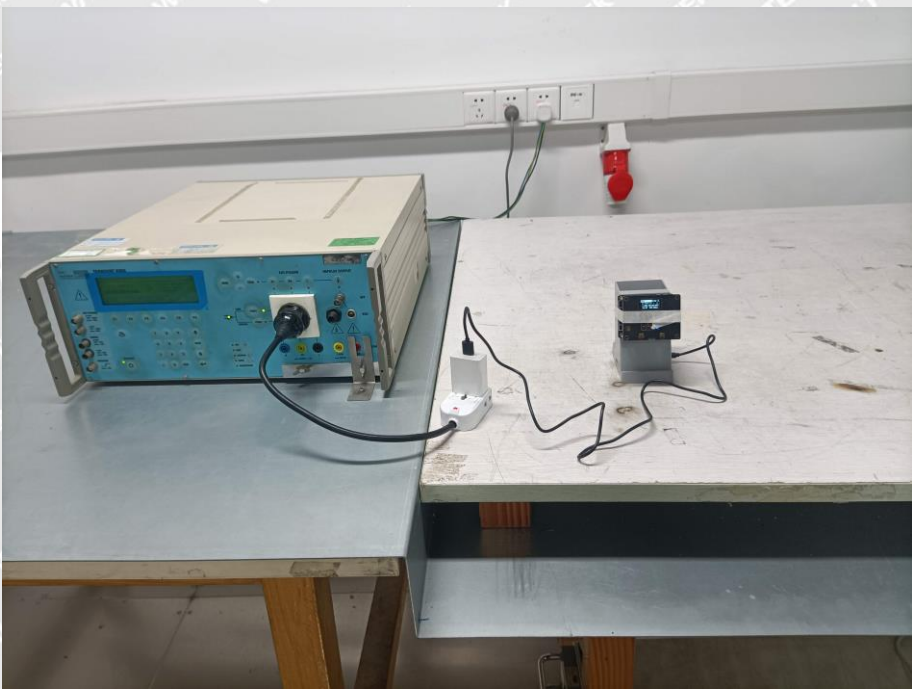



EN 61000-4-6 Test View

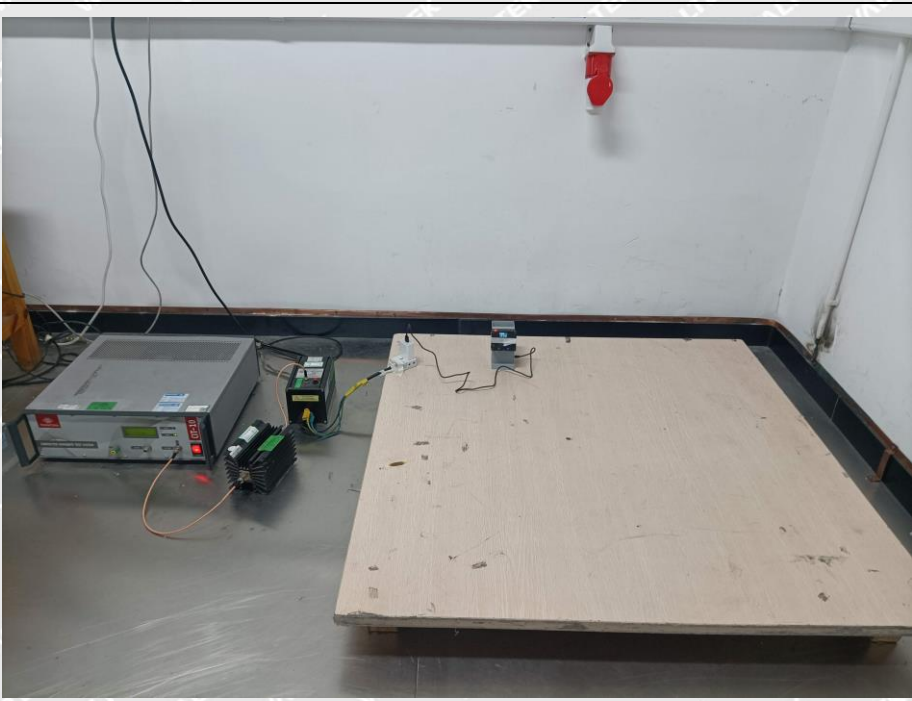

***** END OF REPORT *****

WALTEK