

RF Test Report

Report No.: AGC05443240940ER02

PRODUCT DESIGNATION: Glass wireless charger

BRAND NAME : N/A

MODEL NAME : MO6761

APPLICANT : MID OCEAN BRANDS B.V.

DATE OF ISSUE : Sep. 26, 2024

STANDARD(S) : ETSI EN 303 417 V1.1.1(2017-09)

REPORT VERSION : V1.0

Attestation of Global Conclinate (Shenzhen) Co., Ltd.



Page 2 of 31

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	1	Sep. 26, 2024	Valid	Initial Release



Report No.: AGC05443240940ER02 Page 3 of 31

9

TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION	4
2. EUT DESCRIPTION	
3. DESCRIPTION OF TEST ITEMS	
4. TEST FACILITY	
5. ETSI EN 303 417 REQUIREMENT	
5.1 TRANSMITTER H-FIELD REQUIREMENTS	7
5.2 OPERATING FREQUENCY RANGES	12
5.3 TRANSMITTER OUT OF BAND (OOB) EMISSIONS	15
5.4 TRANSMITTER SPURIOUS EMISSIONS	18
5.5 RECEIVER BLOCKING	27
6. INTERPRETATION OF MEASUREMENT RESULTS	29
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	30
APPENDIX B: PHOTOGRAPHS OF THE EUT	31



Report No.: AGC05443240940ER02 Page 4 of 31

1. TEST RESULT CERTIFICATION

Applicant	MID OCEAN BRANDS B.V.		
Address	7/F. Kings Tower, 111 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong		
Manufacturer	MID OCEAN BRANDS B.V.		
Address	7/F. Kings Tower, 111 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong		
Factory	MID OCEAN BRANDS B.V.		
Address	7/F. Kings Tower, 111 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong		
Product Designation	Glass wireless charger		
Brand Name	N/A		
Test Model	MO6761		
Series Model(s)	N/A		
Difference Description	n N/A		
Date of receipt of test item	eipt of test item Sep. 14, 2024		
Date of test	Sep. 14, 2024 to Sep. 26, 2024		
Deviation	None		
Condition of Test Sample	Normal		
Test Result	Pass		
Report Template	AGCRT-EC-RF		

Note: The test results of this report relate only to the tested sample identified in this report.

Thea Huang
(Project Engineer)

Reviewed By

Calvin Liu
(Reviewer)

Approved By

Max Zhang
(Authorized Officer)

Sep. 26, 2024

Sep. 26, 2024



Report No.: AGC05443240940ER02 Page 5 of 31

2. EUT DESCRIPTION

Details of technical specification refer to the description in follows:

	1
Hardware Version	V1.0
Software Version	V1.0
Frequency Band	110kHz-205kHz
ocw	Energy transmission: Low channel 0.706kHz, Middle Channel 0.731kHz, High channel 0.745kHz Data communication: 0.731kHz
Test Channels	Energy transmission: Low channel 118.3kHz, Middle Channel 137.4kHz, High channel 167.2kHz Data communication: 137.4kHz
Modulation	ASK
Antenna Type	Coil Antenna
Operational Mode	Mode 1: base station in stand-by, idle mode Mode 3: communication Mode 4: energy transmission
Wireless Charging Input Rating	DC 5V/2A,9V/2A
Wireless Charging Output Power	DC 5V/1A,7.5V/1A,9V/1.1A 10W (MAX)

- **NOTE:** 1. For more information, please refer to User's Manual.
- 2. During the initial establishment of the charging mode (mode 2), no or very low emission occur (below the sensitivity level of the test set-up), so the mode 2 can be assumed as irrelevant for the test.
- 3. Mode 3 and mode 4 have been performed within one set-up, worst-case alignment. But each mode have been tested separately with specific test software.
- 4. The maximum temperature of 40 is not a standard requirement and is measured according to the maximum service temperature stated by the manufacturer.
 - 5. The EUT support 9V voltage input and recorded in this report as the worst case.
 - 6. The communication frequency 137.4 kHz corresponds to the maximum field strength.



Page 6 of 31

3. DESCRIPTION OF TEST ITEMS

	Harmonised Standard ETSI EN 303 417					
	Requirement	Requirement Conditionality				
No	Description	Requirement conditionality				
1	Permitted range of operating frequencies					
2	Operating frequency ranges					
3	H-field requirements					
4	Transmitter spurious emissions					
5	Transmitter out of band (OOB) emissions					
6	WPT system unwanted conducted emissions	☐ Applicable ☒ Not Applicable				
7	Receiver blocking					

4. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd	
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China	



Page 7 of 31


5. ETSI EN 303 417 REQUIREMENT

5.1 TRANSMITTER H-FIELD REQUIREMENTS

MEASUREMENT EQUIPMENT USED:

NAME OF EQUIPMENT	MANUFACTURER	MODEL	S/N	Cal. Date	Cal. Due
Test Receiver	R&S	ESCI	10096	Feb. 01, 2024	Jan. 31, 2025
Power amplifer	AR	75A250	18464	N/A	N/A
Active loop antenna(9K-30MHz)	ZHINAN	ZN30900C	18051	Mar. 05, 2024	Mar. 04, 2026

TEST SETUP:

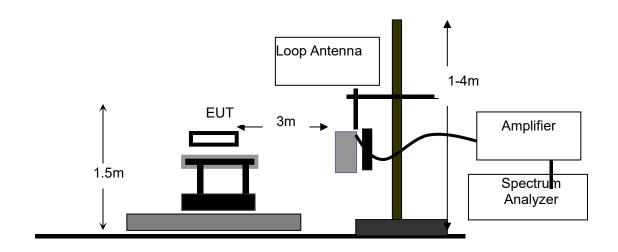



Page 8 of 31

TEST LIMITS:

The H-field limit in $dB\mu A/m$ at 3 m, H_{3m} , is determined by the following equation:

$$H_{3m} = H_{10m} + C_3 (F.2)$$

Where:H_{10m} is the H-field limit in dBµA/m at 10 m distance according to the present document; andC₃ is a conversion factor in dB determined from figure F.2.

According to EN 303 417 Tablet 3,

Table 3: H-field limits

Frequency range [MHz]	H-field strength limit [dBµA/m at 10 m]	Comments
0,019 ≤ f < 0,021	72	
0,059 ≤ f < 0,061	69,1 descending 10 dB/dec above 0,059 MHz	See note 1
0,079 ≤ f < 0,090	67,8 descending 10 dB/dec above 0,079 MHz	See note 2
0,100 ≤ f < 0,119	42	
0,119 ≤ f < 0,135	66 descending 10 dB/dec above 0,119 MHz	See note 1
0,135 ≤ f < 0,140	42	
0,140 ≤ f < 0,1485	37,7	
0,1485 ≤ f < 0,30	-5	
6,765 ≤ f < 6,795	42	

NOTE 1: Limit is 42 dBµA/m for the following spot frequencies: 60 kHz ± 250 Hz and 129,1 kHz ± 500 Hz.
NOTE 2: At the time of preparation of the present document the feasibility of increased limits for high power wireless power transmission systems to charge vehicles [i.4] was prepared. New specific requirements for such systems (e.g. higher H-field emission limits in the 79 - 90 kHz band) will be reflected within a future revision of the present document.

Correction factor, C3, for limits at 3 m distance, dB

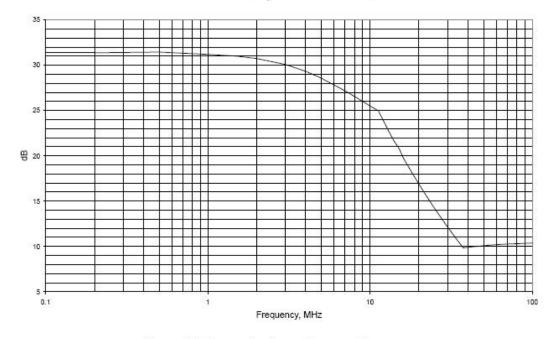


Figure F.2: Conversion factor C₃ versus frequency



Report No.: AGC05443240940ER02 Page 9 of 31

TEST PROCEDURE:

The EUT was placed on the top of an insulating table 0.8 meters above the ground at a semi-anechoic chamber.

The table was rotated 360 degrees to determine the position of the highest radiation.

The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

The H-field is measured with a shielded loop antenna connected to a measurement receiver.

The measuring bandwidth and detector type of the measurement receiver shall be in accordance with EN 300 330 V2.1.1 Table 11.

The EUT operate with modulation under normal and extreme conditions.

TEST RESULTS:

Test Mode: Mode 1

Extreme conditions state

conditions	Test Temp	Test Volt.(V)	Note
TN/VN	25℃	9.00	Worst case
TL/VL	-10℃	8.10	
TH/VL	45℃	8.10	
TL/VH	-10℃	9.90	
TH/VH	45℃	9.90	

Test results tested at 3m test sites:

Freq.	Antenna Factor	Reading Level	Corrected Level	Limit
(MHz)	(dB/m)	(dBuA)	(dBuA/m)	(dBuA/m)
0.1667	29.52	6.35	35.87	26.20

Test results calculated to 10m test sites:

Freq.	Antenna Factor	Reading Level	Corrected Level	Limit
(MHz)	(dB/m)	(dBuA)	(dBuA/m)	(dBuA/m)
0.1667	29.52	-24.85	4.67	-5.00



Page 10 of 31

Test Mode3:

Extreme conditions state

conditions	Test Temp	Test Volt.(V)	Note
TN/VN	25℃	9.00	Worst case
TL/VL	-10℃	8.10	
TH/VL	45℃	8.10	
TL/VH	-10℃	9.90	
TH/VH	45℃	9.90	

Test results tested at 3m test sites:

Freq.	Antenna Factor	Reading Level	Corrected Level	Limit
(MHz)	(dB/m)	(dBuA)	(dBuA/m)	(dBuA/m)
0.1374	29.52	6.41	35.93	73.20

Test results calculated to 10m test sites:

Freq.	Antenna Factor	Reading Level	Corrected Level	Limit
(MHz)	(dB/m)	(dBuA)	(dBuA/m)	(dBuA/m)
0.1374	29.52	-24.79	4.73	42.00



Page 11 of 31

Test Mode: Mode 4:

Extreme conditions state

conditions	Test Temp	Test Volt.(V)	Note
TN/VN	25℃	9.00	Worst case
TL/VL	-10℃	8.10	
TH/VL	45℃	8.10	
TL/VH	-10℃	9.90	
TH/VH	45℃	9.90	

Test results tested at 3m test sites:

Freq.	Antenna Factor	Reading Level	Corrected Level	Limit
(MHz)	(dB/m)	(dBuA)	(dBuA/m)	(dBuA/m)
0.1183	29.64	6.25	35.89	73.20
0.1374	29.52	-3.67	25.85	73.20
0.1672	29.48	-2.38	27.10	26.20

Test results calculated to 10m test sites:

TOST TOSUITS CATOURAL	Test results calculated to Torri test sites.						
Freq.	Antenna Factor	Reading Level	Corrected Level	Limit			
(MHz)	(dB/m)	(dBuA)	(dBuA/m)	(dBuA/m)			
0.1183	29.64	-24.95	4.69	42.00			
0.1374	29.52	-34.87	-5.35	42.00			
0.1672	29.48	-33.58	-4.10	-5.00			

Remark:

(1) Corrected Level (dBuA/m) = Reading Level + Antenna Factor

(2) For the calculated method, please refer to Annex F at EN 300330.

(3) All extreme conditions were considered for test, but only record the worst case.




Page 12 of 31

5.2 OPERATING FREQUENCY RANGES

MEASUREMENT EQUIPMENT USED:

NAME OF EQUIPMENT	MANUFACTURER	MODEL	S/N	Cal. Date	Cal. Due
Test Receiver	R&S	ESCI	10096	Feb. 01, 2024	Jan. 31, 2025
Power amplifer	AR	75A250	18464	N/A	N/A
Active loop antenna(9K-30MHz)	ZHINAN	ZN30900C	18051	Mar. 05, 2024	Mar. 04, 2026

TEST SETUP:

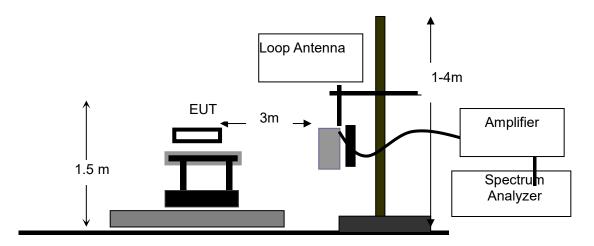

TEST PROCEDURE:

- 1). The EUT was placed on a turn table which is 0.8m above ground plane.
- 2). The EUT was modulated by normal signal,
- 3).Set SPA Center Frequency = fundamental frequency, RBW=VBW=200Hz, Span=5kHz, Detector=RMS. The 99 % OBW function shall be used to determine the operating frequency range, fH is the frequency of the upper marker resulting from the OFR, fL is the frequency of the lower marker resulting from the OFR.
- 4), Both normal test condition and extreme test condition applied

LIMITS

The operating frequency range for emissions shall be within one of the following limits: 19 - 21 kHz, 59 - 61 kHz, 79 - 90 kHz, 100 - 300 kHz, 6 765 - 6 795 kHz.



Page 13 of 31

TEST RESULT

Test Mode: Mode 1

Frequency Range Test Result

Test Temperature	Test Voltage (V DC)	Lowest Frequency(K Hz)	Highest Frequency (KHz)	Limit	
-10℃	8.10	166.341	167.061	100kHz≤&≤300kHz	
-10 C	9.90	166.339	167.062	100kHz≤&≤300kHz	
25℃	9.00	166.336	167.064	100kHz≤&≤300kHz	
4E °C	8.10	166.336	167.063	100kHz≤&≤300kHz	
45℃ 9.90		166.337	167.064	100kHz≤&≤300kHz	
OFR			0.728kHz		
Resu	ults	PASS			

Test Mode: Mode 3

Frequency Range Test Result

Test Temperature	Test Voltage (V DC)	Lowest Frequency(K Hz)	Highest Frequency (KHz)	Limit
-10℃	8.10	137.039	137.764	100kHz≤&≤300kHz
-10 C	9.90	137.037	137.762	100kHz≤&≤300kHz
25℃	9.00	137.035	137.766	100kHz≤&≤300kHz
45℃	8.10	137.037	137.762	100kHz≤&≤300kHz
45 C	9.90	137.038	137.762	100kHz≤&≤300kHz
OFR			0.73	31kHz
Resi	ults	PASS		



Report No.: AGC05443240940ER02 Page 14 of 31

Test Mode: Mode 4:

Frequency Range Test Result

Test Temperature	Test Voltage (V DC)	Lowest Frequency(k Hz)	Highest Frequency (kHz)	Limit
-10℃	8.10	117.949	167.571	100kHz≤&≤300kHz
-10 C	9.90	117.950	167.569	100kHz≤&≤300kHz
25℃	9.00	117.947	167.573	100kHz≤&≤300kHz
45℃	8.10	117.950	167.572	100kHz≤&≤300kHz
45 (9.90	117.949	167.572	100kHz≤&≤300kHz
OFR			49.6	26kHz
Results PASS			ASS	

NOTE: All the modes had been tested, but only the worst data recorded in the report.




Page 15 of 31

5.3 TRANSMITTER OUT OF BAND (OOB) EMISSIONS

MEASUREMENT EQUIPMENT USED:

NAME OF EQUIPMENT	MANUFACTURER	MODEL	S/N	Cal. Date	Cal. Due
Test Receiver	R&S	ESCI	10096	Feb. 01, 2024	Jan. 31, 2025
Power amplifer	AR	75A250	18464	N/A	N/A
Active loop antenna(9K-30MHz)	ZHINAN	ZN30900C	18051	Mar. 05, 2024	Mar. 04, 2026

TEST SETUP:

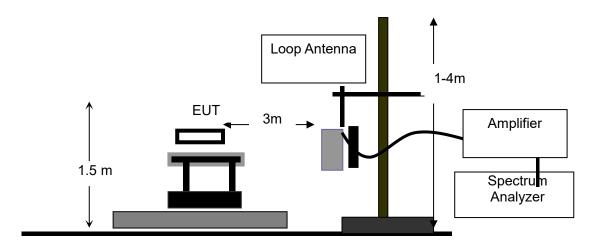

TEST PROCEDURE:

- 1). The EUT was placed on a turn table which is 0.8m above ground plane.
- 2). The EUT was modulated by normal signal,
- 3).Set SPA Center Frequency = fundamental frequency, RBW=VBW=200Hz, Span=5kHz, Detector=RMS. The 99 % OBW function shall be used to determine the operating frequency range, fH is the frequency of the upper marker resulting from the OFR, fL is the frequency of the lower marker resulting from the OFR.
- 4), Both normal test condition and extreme test condition applied



LIMITS

The OOB limits are visualized in figures; they are descending from the intentional limits from Table 3 at fH/fL with 10 dB/decade.

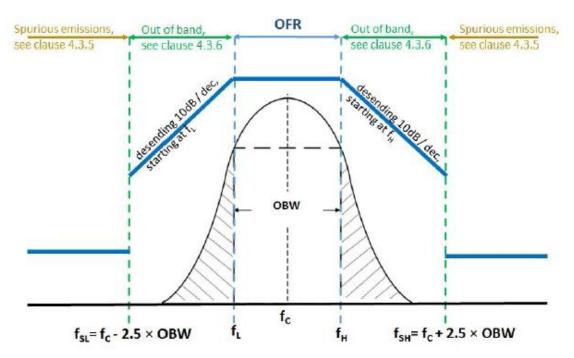


Figure 4: Out of band and spurious domain of a single frequency WPT system

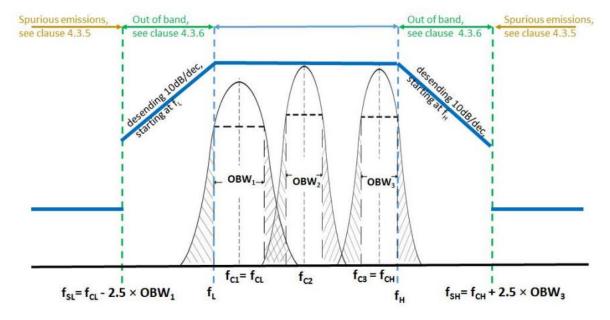


Figure 5: Out of band and spurious domain of a multi - frequency system (during one WPT system cycle time)



Page 17 of 31

TEST RESULTTest Mode: Mode 1

Frequency range (KHz)		Maximum level @10m (dBuA/m)	Limit @ 10m (dBuA/m)	Result
fSL-fL	164.88 to 166.336	Less than -4.49	See figure 4	Pass
fL	166.336	-4.49	-5.00	Pass
fH	167.064	-5.01	-5.00	Pass
fH-fSH	167.064 to 168.52	Less than -5.01	See figure 4	Pass

Test Mode: Mode 3:

Frequency range (kHz)		Maximum level @10m (dBuA/m)	Limit @ 10m (dBuA/m)	Result
fSL-fL	135.573 to 137.035	Less than -4.43	See figure 4	Pass
fL	137.035	-4.43	42.00	Pass
fH	137.766	-4.95	42.00	Pass
fH-fSH	137.766 to 139.228	Less than -4.95	See figure 4	Pass

Test Mode: Mode 4:

Freque	Frequency range (kHz) (dBuA/m)		Limit @ 10m (dBuA/m)	Result
fSL-fL	116.535 to 117.947	Less than -4.47	See figure 4	Pass
fL	117.947	-4.47	42.00	Pass
fH	167.573	-13.78	-5.00	Pass
fH-fSH	167.573 to 169.063	Less than -13.78	See figure 4	Pass

NOTE: All the modes had been tested, but only the worst data recorded in the report.




5.4 TRANSMITTER SPURIOUS EMISSIONS

MEASUREMENT EQUIPMENT USED:


NAME OF EQUIPMENT	MANUFACTURER	MODEL	S/N	Cal. Date	Cal. Due
Test Receiver	R&S	ESCI	10096	Feb. 01, 2024	Jan. 31, 2025
Power amplifer	AR	75A250	18464	N/A	N/A
Active loop antenna(9K-30MHz)	ZHINAN	ZN30900C	18051	Mar. 05, 2024	Mar. 04, 2026
Wideband Antenna	SCHWARZBECK	VULB9168	VULB9168-494	Jan. 05, 2023	Jan. 04, 2025

TEST SETUP:

FREQUENCY RANGE (9kHZ-30MHZ)

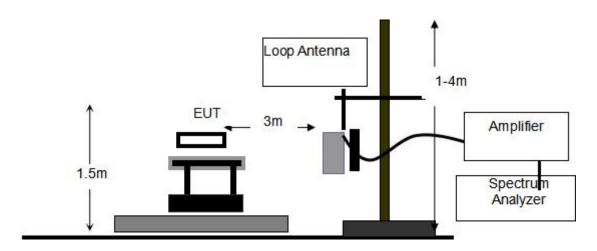

FREQUENCY RANGE (ABOVE 30MHZ)

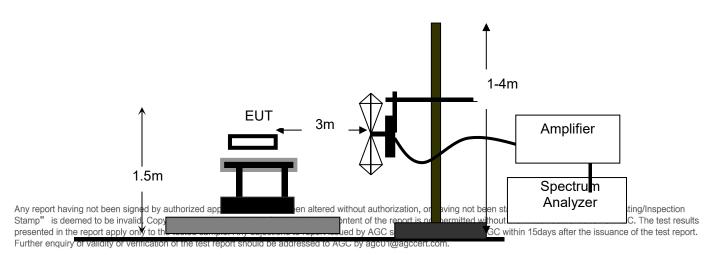


Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Page 19 of 31

SUBSTITUTION METHOD:

RADIATED BELOW 1GHZ

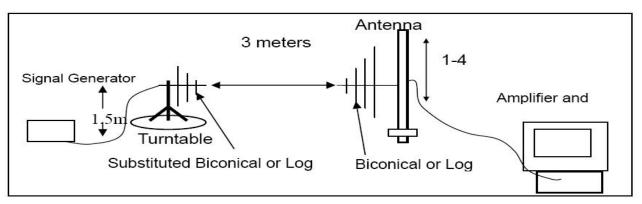

TEST PROCEDURE:

For test method of frequency range (9kHz-30MHz)

The EUT was placed on the top of an insulating table 1.5 meters above the ground at a semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

The H-field is measured with a shielded loop antenna connected to a measurement receiver.

The measuring bandwidth and detector type of the measurement receiver shall be in accordance with EN 300 330 Table 1.

For test method of frequency range (30 MHz-1000MHz)

EUT was placed on a 1.5m height wooden table. The search antenna is placed at 3m distances from the EUT and search antenna height is from 1-4m. With the transmitter operating at continuously mode, the turntable was slowly rotated to locate the direction of maximum emission. Once maximum direction is determined, the search antenna was raised and lowered in both vertical and horizontal polarizations.

The EUT was removed from the turntable and replaced with a linearly polarized antenna connected to a calibrated RF signal generator. The RF generator was set to a measured emission frequency and the search antenna was raised and lowered to produce a maximum received reading. The generator output was increased to match the radiated emission reading measured previously, and the result expressed in dB EIRP or ERP, correcting for substitution antenna gain at each frequency.



Page 20 of 31

LIMITS OF RADIATED DISTURBANCES

Below 30MHz

Table 4

State (see note)	Frequency 9 kHz ≤ f < 10 MHz	Frequency 10 MHz ≤ f < 30 MHz
Operating	27 dBμA/m at 9 kHz descending 10 dB/dec	-3,5 dBμA/m
Standby	5,5 dBμA/m at 9 kHz descending 10 dB/dec	-25 dBμA/m
	g" means mode 2, 3 and 4 according to Ta to Table 2.	able 2; "standby" means mode 1

ABOVE 30MHz

Table 5

State (see note)	47 MHz to 74 MHz 87,5 MHz to 118 MHz 174 MHz to 230 MHz 470 MHz to 790 MHz	Other frequencies between 30 MHz to 1 000 MHz
Operating	4 nW	250 nW
Standby	2 nW	2 nW
NOTE: "Operating" means	mode 2, 3 and 4 according to Table 2;	"standby" means mode 1 according to
Table 2.		2 95 95 95 97 97 97 97 97 97 97 97 97 97 97 97 97



Page 21 of 31

TEST LIMITS & RESULT

Test Mode: Mode 3:

FREQUENCY RANGE (9kHZ-30MHZ)

	Operation Mode										
Frequency	Reading level	Total Factor	Emission level	Limit	Margin						
(MHz)	(dB µA)	(dB/m)	(dB µA/m)	(dBµA/m)	(dBµA/m)						
0.025	-7.70	-7.96	-15.66	22.58	38.24						
0.291	-11.39	-7.96	-19.35	11.91	31.25						
0.612	-12.84	-7.96	-20.80	8.68	29.48						
1.634	-14.74	-3.98	-18.72	4.41	23.13						
3.556	-13.23	-3.09	-16.32	1.03	17.35						
4.527	-12.51	-1.25	-13.76	-0.02	13.74						

Remark:

- (1) Corrected Power (dBm)= Total Factor + Reading Level
- (2) Measuring frequencies from 9kHz to the 30MHz.

Data of measurement within this frequency range shown " -- " in the table above means the

reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.



Page 22 of 31

FREQUENCY RANGE (ABOVE 30MHZ)

Transmitter Spurious Emission below 1GHz (30MHz-1GHz)

Frequency	Reading Level	Antenna	S.G.	Cable Loss	Ant.Gain	Emission Level	Limit	Margin
(MHz)	(dBuv/m)	Polarization	(dBm)	(dB)	(dBi)	(dBm)	(dBm)	(dB)
84.44	30.77	V	-58.76	0.48	0.54	-58.70	-36.00	22.70
129.92	31.11	V	-58.08	0.49	0.14	-58.43	-36.00	22.43
240.38	30.95	V	-65.89	0.52	6.60	-59.81	-36.00	23.81
326.12	30.74	V	-66.75	0.53	6.10	-61.18	-36.00	25.18
335.10	31.56	V	-65.41	0.53	5.90	-60.04	-36.00	24.04
827.95	31.88	V	-66.53	0.66	6.45	-60.74	-36.00	24.74
83.89	32.55	Н	-58.67	0.48	0.38	-58.77	-36.00	22.77
131.02	30.38	Н	-59.87	0.49	0.08	-60.28	-36.00	24.28
242.61	29.64	Н	-66.30	0.52	6.72	-60.10	-36.00	24.10
325.49	30.40	Н	-65.66	0.53	6.10	-60.09	-36.00	24.09
735.77	30.59	Н	-70.59	0.59	6.60	-64.58	-54.00	10.58
828.16	31.45	Н	-66.29	0.66	6.40	-60.55	-36.00	24.55

Note: 1.The margins of the other spectrum are not exceeding the minimum value of margin, and this part of the results without recording in the test report.

2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "--" remark, if no specific emission from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.



Page 23 of 31

Test Mode: Mode 4(The low channel is the worst case): FREQUENCY RANGE (9kHZ-30MHZ)

	Operation Mode										
Frequency	Reading level	Total Factor	Emission level	Limit	Margin						
(MHz)	(dB μA)	(dB/m)	(dB µA/m)	(dBµA/m)	(dBµA/m)						
0.041	-7.92	-7.96	-15.88	20.39	36.27						
0.277	-11.14	-7.96	-19.10	12.12	31.22						
0.412	-12.67	-7.96	-20.63	10.39	31.02						
1.752	-14.72	-3.98	-18.70	4.11	22.81						
2.874	-13.37	-3.09	-16.46	1.96	18.42						
3.839	-12.70	-1.25	-13.95	0.70	14.65						

Remark:

- (1) Corrected Power (dBm) = Total Factor + Reading Level
- (2) Measuring frequencies from 9kHz to the 30MHz.
- Data of measurement within this frequency range shown " -- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.



Page 24 of 31

FREQUENCY RANGE (ABOVE 30MHZ)

Transmitter Spurious Emission below 1GHz (30MHz-1GHz)

Frequency	Reading Level	Antenna	S.G.	Cable Loss	Ant.Gain	Emission Level	Limit	Margin
(MHz)	(dBuv/m)	Polarization	(dBm)	(dB)	(dBi)	(dBm)	(dBm)	(dB)
84.47	30.56	V	-61.54	0.48	0.54	-61.48	-36.00	25.48
130.45	30.33	V	-61.49	0.49	0.10	-61.88	-36.00	25.88
239.87	30.92	V	-65.91	0.52	6.60	-59.83	-36.00	23.83
326.02	30.43	V	-66.38	0.53	6.10	-60.81	-36.00	24.81
334.44	31.18	V	-66.46	0.53	5.94	-61.05	-36.00	25.05
827.44	32.22	V	-65.20	0.66	6.45	-59.41	-36.00	23.41
84.13	32.10	Н	-59.33	0.48	0.54	-59.27	-36.00	23.27
131.50	31.09	Н	-58.42	0.49	0.08	-58.83	-36.00	22.83
242.46	29.82	Н	-67.22	0.52	6.72	-61.02	-36.00	25.02
326.02	30.62	Н	-67.11	0.53	6.10	-61.54	-36.00	25.54
734.94	30.78	Н	-70.63	0.59	6.64	-64.58	-54.00	10.58
827.65	30.88	Н	-65.17	0.66	6.45	-59.37	-36.00	23.37

Note: 1.The margins of the other spectrum are not exceeding the minimum value of margin, and this part of the results without recording in the test report.

2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "--" remark, if no specific emission from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.



Page 25 of 31

Test Mode: Mode 1:

FREQUENCY RANGE (9KHZ-30MHZ)

	Standby Mode										
Frequency	Reading level	Total Factor	Emission level	Limit	Margin						
(MHz)	(dB μA)	(dB/m)	(dB μA/m)	(dBµA/m)	(dBµA/m)						
0.023	-7.49	-7.96	-15.45	1.51	16.96						
0.240	-10.29	-7.96	-18.25	-8.75	9.50						
0.528	-11.58	-7.96	-19.54	-12.19	7.35						
1.978	-23.03	-3.98	-27.01	-17.92	9.09						
2.669	-27.71	-3.09	-30.80	-19.22	11.58						
4.412	-26.53	-1.25	-27.78	-21.40	6.37						

Remark:

- (1) Corrected Power (dBm) = Total Factor + Reading Level
- (2) Measuring frequencies from 9kHz to the 30MHz.
- Data of measurement within this frequency range shown " -- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.



Page 26 of 31

FREQUENCY RANGE (ABOVE 30MHZ)

Transmitter Spurious Emission below 1GHz (30MHz-1GHz)

Frequency	Reading Level	Antenna	S.G.	Cable Loss	Ant.Gain	Emission Level	Limit	Margin
(MHz)	(dBuv/m)	Polarization	(dBm)	(dB)	(dBi)	(dBm)	(dBm)	(dB)
85.13	30.55	V	-65.45	0.48	0.70	-65.23	-57.00	8.23
130.07	30.45	V	-66.46	0.49	0.10	-66.85	-57.00	9.85
239.83	31.26	V	-72.49	0.52	6.60	-66.41	-57.00	9.41
325.94	30.89	V	-69.09	0.53	6.10	-63.52	-57.00	6.52
334.44	31.73	V	-69.89	0.53	5.94	-64.48	-57.00	7.48
827.18	31.72	V	-71.68	0.66	6.45	-65.89	-57.00	8.89
83.34	31.94	Н	-67.74	0.48	0.38	-67.84	-57.00	10.84
131.80	30.40	Н	-63.78	0.49	0.08	-64.19	-57.00	7.19
243.00	29.90	Н	-69.54	0.52	6.78	-63.28	-57.00	6.28
325.50	31.14	Н	-71.42	0.53	6.10	-65.85	-57.00	8.85
735.62	30.47	Н	-70.13	0.59	6.60	-64.12	-57.00	7.12
828.01	30.71	Н	-67.91	0.66	6.40	-62.17	-57.00	5.17

Note: 1.The margins of the other spectrum are not exceeding the minimum value of margin, and this part of the results without recording in the test report.

2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "--" remark, if no specific emission from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.




Page 27 of 31

5.5 RECEIVER BLOCKING

MEASUREMENT EQUIPMENT USED:

NAME OF EQUIPMENT	MANUFACTURER	MODEL	S/N	Cal. Date	Cal. Due
MXG X-Series Vector Signal Generator	Agilent	N5182B	MY53050647	Feb. 01, 2024	Jan. 31, 2025
Active loop antenna(9K-30MHz)	ZHINAN	ZN30900C	18051	Mar. 05, 2024	Mar. 04, 2026
Clamp meter	PROVA	PROVA-11	17200101	Sep. 11, 2024	Sep. 10, 2025

TEST SETUP:

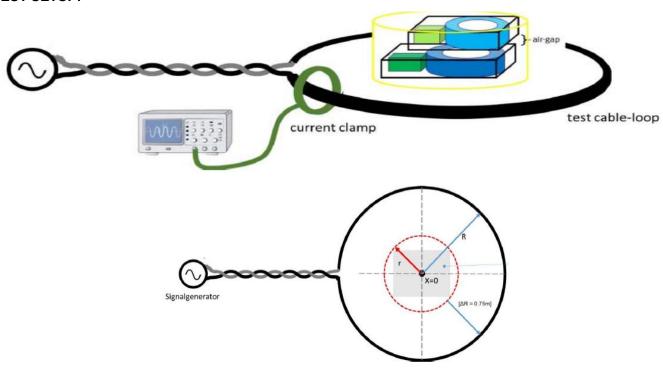

TEST PROCEDURE:

- 1). The test shall be carried out inside a test chamber according to clauses C.1.1 and C.1.2 in ETSI EN 300 330
- 2). A test loop with a radius r shall be used to create the magnetic field; the test loop shall lie on a non-metallic ground and the minimum distance to metallic objects (e.g. ground plane) shall be 0,75 m.The EUT shall be placed to the centre of the test-loop
- 3). The test loop shall be sufficiently large so that the test loop itself does not influence the WPT system; The radius R of the test-loop shall be in minimum $\Delta R = 0.75$ m larger than the maximum dimension r of the EUT.

$$R >= r + \Delta R$$
.

The maximum H-Field can be calculated from the loop current I (into the test-loop) with the following formula:

H=I/2R



Report No.: AGC05443240940ER02 Page 28 of 31

4)The required output current to achieve the required magnetic field at the WPT system shall be generated with a signal generator (unmodulated signal) at the test frequencies. For each test frequency the "reaction" of the device shall be recorded and checked against the performance criterion

LIMITS

The EUT shall achieve the wanted performance criterion, in the presence of the blocking signal.

Table 6: Receiver blocking limits

8	In-band signal	OOB signal	Remote-band signal
Frequency	Centre frequency (f _c) of the WPT	$f = f_c \pm F$ (see note)	$f = f_c \pm 10 \times F$ (see note)
	system (see clause 4.3.3)	253	25.3
Signal level field strength at	72 dBμA/m	72 dBµA/m	82 dBµA/m
the EUT	2 000 000 000 000 000 000 000 000 000 0	0.000 VEX.000 12 • 0.000 VEX.000 VE	
NOTE: F = OFR see claus	e 4.3.3.		

TEST RESULT

Test Mode: Mode 1

Test I	Frequency(KHz)	Signal level @ EUT	Performance	Result
In-band signal	166.700	72dBuA/m	No function loss	Pass
OOB signal	165.972	72dBuA/m	No function loss	Pass
OOB Signal	167.428	72dBuA/m	No function loss	Pass
Remote-band	159.420	82dBuA/m	No function loss	Pass
signal	173.980	82dBuA/m	No function loss	Pass

Test Mode: Mode 3:

Test	Frequency(kHz)	Signal level @ EUT	Performance	Result
In-band signal	137.400	72dBuA/m	No function loss	Pass
OOB signal	136.669	72dBuA/m	No function loss	Pass
OOB Signal	138.131	72dBuA/m	No function loss	Pass
Remote-band	130.090	82dBuA/m	No function loss	Pass
signal	144.710	82dBuA/m	No function loss	Pass




Page 29 of 31

6. INTERPRETATION OF MEASUREMENT RESULTS

All the measurement equipments and accessories have been carefully selected to meet the maximum measurement uncertainty specified below:

RF Frequency	± 1 x 10 ⁻⁷
RF Power, Conducted	± 0.75dB
Maximum Frequency Deviation: _ Within 300Hz and 6KHz of Audio Frequency _ Within 6KHz and 25KHz of Audio Frequency	± 5% ± 3dB
Adjacent channel power	± 3dB
Operating frequency ranges	± 2%
Conducted Emission of Transmitter, Valid Up to 12.75GHz	± 4dB
Conducted Emissions of Receivers	± 3dB
Radiated Emission of Transmitter, Valid Up to 12.75GHz	± 6dB

P.S. Uncertainty figures are valid to confidence level of 95% calculated according to the methods described in the ETSI TR 100 028.





APPENDIX A: PHOTOGRAPHS OF TEST SETUP







Page 31 of 31

APPENDIX B: PHOTOGRAPHS OF THE EUT

Refer to the Report No.: AGC05443240940AP01
----END OF REPORT---



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.



Health Test Report

Report No.: AGC05443240940EH01

PRODUCT DESIGNATION: Glass wireless charger

BRAND NAME : N/A

MODEL NAME : M06761

APPLICANT: MID OCEAN BRANDS B.V.

DATE OF ISSUE : Sep. 26, 2024

STANDARD(S) : EN IEC 62311:2020 EN 50665:2017

REPORT VERSION: V1.0

Attestation of Global Confice (Shenzhen) Co., Ltd.



Page 2 of 13

REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	1	Sep. 26, 2024	Valid	Initial release



Page 3 of 13

TABLE OF CONTENTS

TABLE OF CONTENTS	3
1. GENERAL INFORMATION	4
2. TECHNICAL INFORMATION	5
3. RF EXPOSURE MEASUREMENT	6
3.1 INTRODUCTION	6 7 8
4. TEST EQUIPMENT LIST	9
4.1 MEASUREMENT UNCERTAINTY	9
5. EUT OPERATION CONDITION	9
6. TEST RESULT	
7. CONCLUSION	10
APPENDIX I: PHOTOGRAPHS OF TEST SETUP	11



Page 4 of 13

1. GENERAL INFORMATION

Applicant	MID OCEAN BRANDS B.V.	
Address	7/F. Kings Tower, 111 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong	
Manufacturer	MID OCEAN BRANDS B.V.	
Address	7/F. Kings Tower, 111 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong	
Factory	MID OCEAN BRANDS B.V.	
Address	7/F. Kings Tower, 111 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong	
Product Designation	Glass wireless charger	
Brand Name	N/A	
Test Model	MO6761	
Series Model(s)	N/A	
Difference Description	N/A	
Date of receipt of test item Sep. 14, 2024		
Date of test	Sep. 14, 2024 to Sep. 26, 2024	
Test Result	Pass	

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By	Thea Huang	
	Thea Huang (Project Engineer)	Sep. 26, 2024
Reviewed By	Calin Lin	
	Calvin Liu (Reviewer)	Sep. 26, 2024
Approved By	Max Zhang	
_	Max Zhang (Authorized Officer)	Sep. 26, 2024



Page 5 of 13

2. TECHNICAL INFORMATION

Note: the following data is based on the information by the applicant.

Product Designation	Glass wireless charger
Brand Name	N/A
Test Model	MO6761
Hardware Version	V1.0
Software Version	V1.0
Frequency Band	110kHz-205kHz
Modulation type	ASK
Antenna Type	Coil Antenna
Input Rating	DC 5V/2A,9V/2A
Wireless Charging Output Power	DC 5V/1A,7.5V/1A,9V/1.1A 10W (MAX)

Note: For more details, please refer to the user's manual of the EUT.



Page 6 of 13

3. RF EXPOSURE MEASUREMENT

3.1 INTRODUCTION

This International Standard applies to electronic and electrical equipment for which no dedicated product- or product family standard regarding human exposure to electromagnetic fields applies.

This generic standard applies to electronic and electrical apparatus for which no dedicated product- or product family standard regarding human exposure to electromagnetic fields applies.

The frequency range covered is 0 Hz to 300 GHz.

The object of this generic standard is to provide assessment methods and criteria to evaluate such equipment against basic restrictions or reference levels on exposure of the general public related to electric, magnetic, electromagnetic fields and induced and contact current.

NOTE: This standard is intended to cover both intentional and non-intentional radiators. If the equipment complies with the requirements in another relevant standard, e.g. EN 62479 covering low power equipment, then the requirements of this standard (IEC 62311) are considered to be met and the application of this standard to that equipment is not necessary.



Page 7 of 13

3.2 TEST LIMIT

According to EN IEC 62311:2020, Assessment of electronic and electrical equipment related to human exposure restrictions for electromagnetic fields (0 Hz – 300 GHz).

Annex F Measurement of E and H field

A commonly used probe size is 100 cm², also the contribution of the three axes X, Y and Z can be evaluated separately.

Reference levels for electric, magnetic and electromagnetic fields (0 Hz to 300 GHz, unperturbed rms values)

Frequency range	E-field strength (V/m)	H-field strength (A/m)	B-field (μT)	Equivalent plane wave power density S _{eq} (W/m²)
0-1 Hz	_	3,2 × 10 ⁴	4 × 10 ⁴	_
1-8 Hz	10 000	$3,2 \times 10^4/f^2$	$4 \times 10^{4}/f^{2}$	2 <u>42</u> 7
8-25 Hz	10 000	4 000/f	5 000/f	_
0,025-0,8 kHz	250/f	4/f	5/f	_
0,8-3 kHz	250/f	5	6,25	_
3-150 kHz	87	5	6,25	0 <u>10</u> 0
0,15-1 MHz	87	0,73/f	0,92/f	(
1-10 MHz	87/f ^{1/2}	0,73/f	0,92/f	_
10-400 MHz	28	0,073	0,092	2
400-2 000 MHz	1,375 f ^{1/2}	0,0037 f ^{1/2}	0,0046 f ^{1/2}	f/200
2-300 GHz	61	0,16	0,20	10




Page 8 of 13

3.3 EVALUATION METHODS

Measurement of E and H field

A commonly used probe size is 100 cm², also the contribution of the three axes X, Y and Z can be evaluated separately.

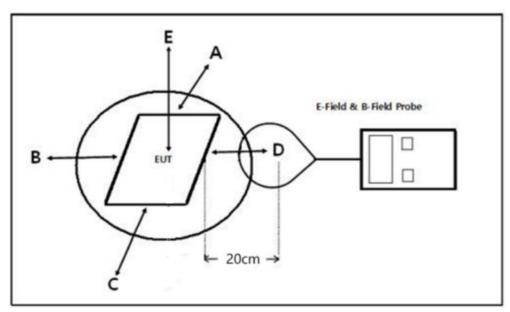

Note: Position A: Front of EUT; Position B: Left of EUT; Position C: back of EUT; Position D: Right of EUT; Position E: Top of EUT

Based on the above standard limit, any device with output power below 5A/m or 3.56A/m cannot produce an exposure exceeding this restriction under the most pessimistic exposure conditions.



Page 9 of 13

4. TEST EQUIPMENT LIST

Description	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Broadband Field Meter	WAVECONTROL	SMP2	19SN1101	Feb. 24, 2023	Feb. 23, 2025
Probe FHP	WAVECONTROL	WP400	19WP100558	Feb. 24, 2023	Feb. 23, 2025

4.1 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
E-Field Strength(0.003-0.4MHz)	±1.5dB
E-Field Strength(0.4-10MHz)	±1.3dB
B-Field (0.003-0.4MHz)	±1.3dB
B-Field (0.4-10MHz)	±1.2dB

5. EUT OPERATION CONDITION

NO.	TEST MODE DESCRIPTION	
1	Type-C Input+ Wireless Full Load Mode (10W)	
2	Type-C Input+ Wireless Half load Mode (5W)	
3	Type-C Input+ Wireless Null load Mode	
Note: 1. All modes are pre-tested for EMI and the worst mode is finally reflected.		



Page 10 of 13

6. TEST RESULT

110kHz-205kHz

	1			
Frequency	Maximum Radiated H-Field at 20cm		Limit	Result
MHz	A/m		A/m	Pass/Fail
137.4kHz	position E	0.075	5	Pass
	position A	0.064		
	position B	0.069		
	position C	0.071		
	position D	0.068		

Since Radiated H-Field at worse case is 0.075A/m which cannot exceed the exempt condition, 5A/m. It is deemed to full fit the requirement of RF exposure basic restriction specified in EC Council Recommendation (1999/519/EC).

7. CONCLUSION


Remark: EUT meets the basic requirements in the standard.




Page 11 of 13

APPENDIX I: PHOTOGRAPHS OF TEST SETUP

WPT Equipment_ Position E

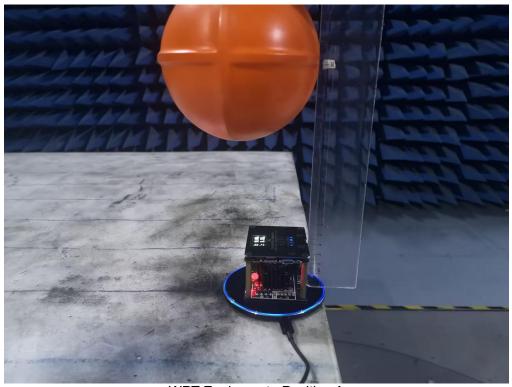

WPT Equipment_ Position A

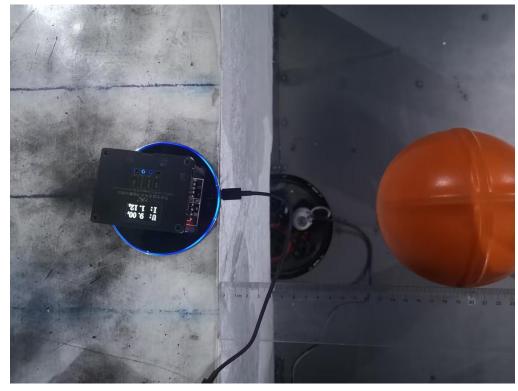




Page 12 of 13

WPT Equipment_ Position B



WPT Equipment_ Position C

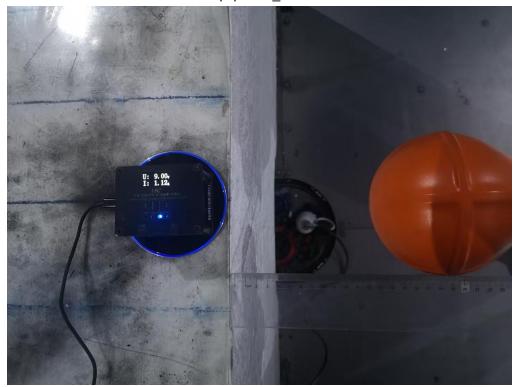



Page 13 of 13





----END OF REPORT----



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.