

# Test Report

|         |   |  |
|---------|---|--|
| Client  | : |  |
| Address | : |  |

The following sample(s) and sample information was/were submitted and identified by/on the behalf of the client

|                |   |  |
|----------------|---|--|
| Sample Name    | : | Lithium ion battery  |
| Model/P.O. No. | : | 400909-25mAh/401012-30mAh/ 502030-200mAh/602030-300mAh                                     |
| Manufacturer   | : |  |
| Received Date  | : | Dec 23, 2024   |
| Test Period    | : | Dec 23, 2024~Dec 27, 2024  |
| Test Requested | : | Annex I of Regulation (EU) 2023/1542-Heavy Metals Content in batteries and waste batteries |

## Conclusion

- Lead(Pb), Cadmium(Cd), Mercury(Hg)

PASS

For Further Details, Please Refer To the Following Page(s)

Approved by: *Jane Liu*

Date: Dec 30, 2024



ShenZhen Tiansu Calibration and Testing Co., Ltd.

Add: Building 1/4, No.2, Jinlong Road, Longgang District, Shenzhen, Guangdong, China.

Post Code: 518116

Tel: 0755-89457984

Website: www.tiansu.org

E-mail: tsjc@tiansu.org

**Test Methods**

| Test Items            | Test Method                | Equipment |
|-----------------------|----------------------------|-----------|
| Lead(Pb), Cadmium(Cd) | IEC 62321-5:2013           | ICP-OES   |
| Mercury(Hg)           | IEC 62321-4:2013+AMD1:2017 | ICP-OES   |

**Test Results**

| Test components     | Test Item(s) | MDL (%) | Result(s) (%) | Limit (%) |
|---------------------|--------------|---------|---------------|-----------|
| Lithium ion battery | Lead(Pb)     | 0.0005  | N.D.          | 0.0100    |
|                     | Cadmium(Cd)  | 0.0005  | N.D.          | 0.0020    |
|                     | Mercury(Hg)  | 0.0001  | N.D.          | 0.0005    |

**Note:**

- N.D.=Not Detected (<MDL); MDL=method detection limit.

According to regulation (EU) 2023/1542, All batteries containing more than 0.002 % cadmium or more than 0.004 % lead, shall be marked with the chemical symbol for the metal concerned: Cd or Pb.

- The relevant chemical symbol indicating the heavy metal content shall be printed beneath the separate collection symbol and shall cover an area of at least one-quarter the size of that symbol.

**Test Process:**

Test Lead(Pb), Cadmium(Cd), Mercury(Hg) concentration:


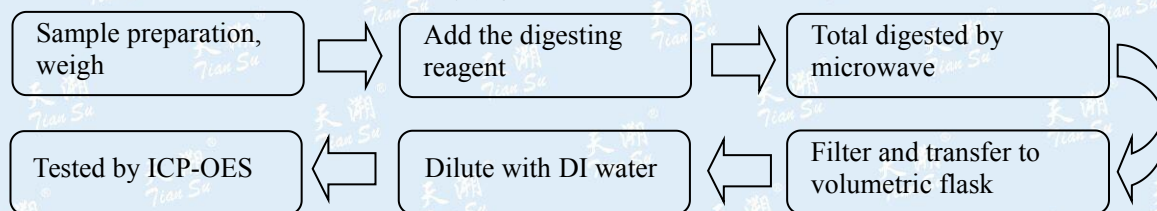


Photo of the sample

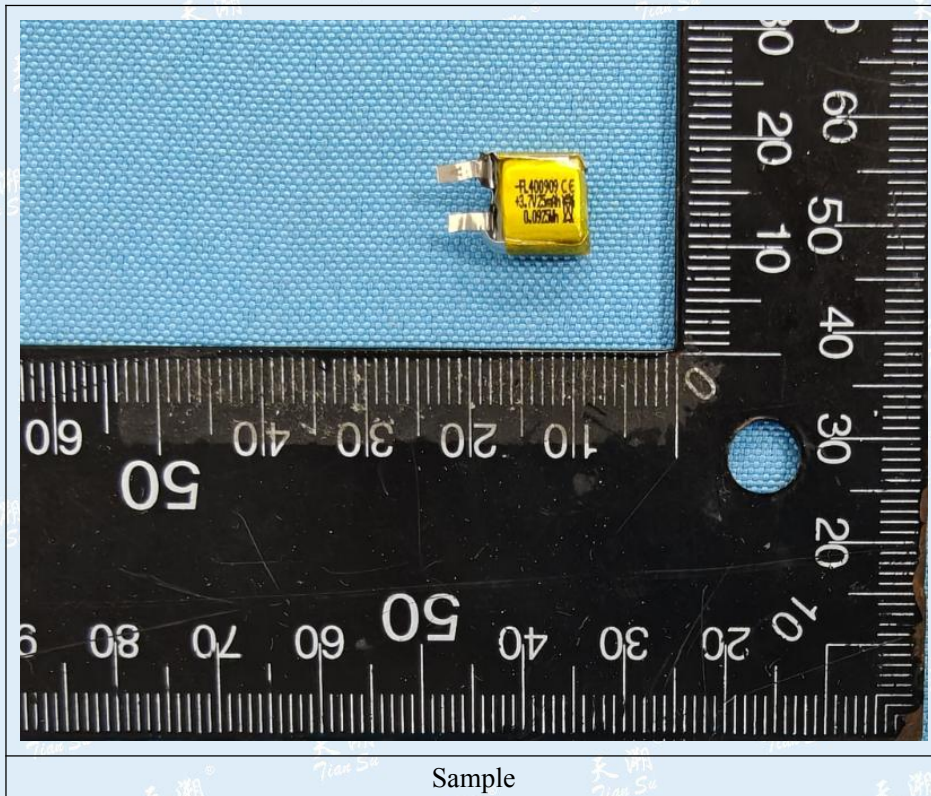

\*\*\*\*\* End of report \*\*\*\*\*

This report is invalid without the Special Seal of Tiansu. This report shall not be altered, increased or deleted. The results shown in this report refer only to the sample(s) tested.

---

# Battery Test Report

---

Report No.: LA2024B0860002-M1

Samples Polymer lithium-ion rechargeable Cell

---

Model FL400909

---

Applicant

---

Issue Date 2024-11-26

---

深圳市莱恩瑞斯科技有限公司

**Shenzhen Lionaces Technology Co., Ltd.**



.com

Add: 301, Building B6, Junfeng Industrial Zone, Yonghe Road, Heping Community, Fuhai Street, Baoan District, Shenzhen, Guangdong, China.

Website: www.lionaces.com

E-mail: service@lionaces.com

Tel: (86-755)-28280690

**IEC 62133-2:2017, IEC 62133-2:2017/AMD1:2021**

**Secondary cells and batteries containing alkaline or other non-acid electrolytes – Safety requirements for portable sealed secondary cells, and for batteries made from them, for use in portable applications – Part 2: Lithium systems**

Report Reference No. .... : LA2023B0860001-M1

Tested by (+ signature) ..... : Yanyun Xie

*Xie Yanyun*

Reviewed by (+ signature) ..... : Allen Zeng

*Allen Zeng*

Approved by (+signature) ..... : Rick Liu

*Rick Liu*

Date of issue ..... : 2024-11-26

Contents ..... : Total 26 pages.

**Testing laboratory**

Name ..... : Shenzhen Lionaces Technology Co., Ltd.

Address ..... : 301, Building B6, Junfeng Industrial Zone, Yonghe Road, Heping Community, Fuhai Street, Baoan, Shenzhen, Guangdong, China

Testing location ..... : Same as above.

**Applicant**

Name ..... :

Address..... :

**Manufacturer**

Name ..... :

Address..... :

**Test specification**

Standard ..... : IEC 62133-2:2017, IEC 62133-2:2017/AMD1:2021

Test procedure ..... : Type test

Procedure deviation ..... : N/A

Non-standard test method ..... : N/A

**Test Report Form/blank test report**

Test Report Form No. .... : IEC62133\_2C

Test Report Form(s) Originator ..... : Lionaces

Master TRF..... : Dated 2022-07



.com

Add: 301, Building B6, Junfeng Industrial Zone, Yonghe Road, Heping Community, Fuhai Street, Baoan District, Shenzhen, Guangdong, China.

Website: www.lionaces.com

E-mail: service@lionaces.com

Tel: (86-755)-28280690

**Test item**

Product designation.....: Polymer lithium-ion rechargeable Cell  
 Brand name.....: N/A  
 Test model.....: FL400909  
 Rating(s).....: 3.7V, 25mAh, 0.0925Wh

**Test item particulars**

Classification of installation and use.....: N/A  
 Supply connection.....: DC electrode tab  
 Recommend charging method declared by the manufacturer.....: Charge at constant current 5mA until the voltage reaches 4.2V, then charge at 4.2V till charge current is 0.5mA at ambient 20°C ± 5°C.  
 Discharge current(0.2I<sub>A</sub>).....: 5mA  
 Specified final voltage.....: 3.0V  
 Chemistry.....:  nickel systems  lithium systems  
 Recommend of charging limit for lithium system  
 Upper limit charging voltage per cell.....: 4.2V  
 Maximum charging current.....: 12.5mA  
 Charging temperature upper limit.....: 45°C  
 Charging temperature lower limit.....: 0°C  
 Polymer cell electrolyte type.....:  gel polymer  solid polymer  N/A

**Test case verdicts**

Test case does not apply to the test object.....: N (/A)  
 Test item does meet the requirement.....: P (ass)  
 Test item does not meet the requirement.....: F (ail)

**Testing**

Date of receipt of test item.....: 2024-07-05  
 Date(s) of performance of test.....: 2024-07-05 to 2024-07-19

**Attachment**

Attachment A.....: Photos of product

**General remarks**

This report shall not be reproduced except in full without the written approval of the testing laboratory.  
 The test results presented in this report relate only to the item tested.  
 “(See remark #)” refers to a remark appended to the report.  
 “(See appended table)” refers to a table appended to the report.  
 Throughout this report a point is used as the decimal separator.

The product fulfills the requirements of IEC 62133-2:2017, IEC 62133-2:2017/AMD1:2021. and EN 62133-2:2017, EN 62133-2:2017/AMD1:2021.

Report Revise Record:

| Report Version | Revise Time | Issued Date | Valid Version | Notes           |
|----------------|-------------|-------------|---------------|-----------------|
| V1.0           | /           | 2024-07-21  | Invalid       | Original report |
| V1.1           | 2024-11-26  | 2024-11-26  | Valid         | Second report   |



.com

Add: 301, Building B6, Junfeng Industrial Zone, Yonghe Road, Heping Community, Fuhai Street, Baoan District, Shenzhen, Guangdong, China.

Website: www.lionaces.com

E-mail: service@lionaces.com

Tel: (86-755)-28280690



.com

Add: 301, Building B6, Junfeng Industrial Zone, Yonghe Road, Heping Community, Fuhai Street, Baoan District, Shenzhen, Guangdong, China.

Website: [www.lionaces.com](http://www.lionaces.com)

E-mail: [service@lionaces.com](mailto:service@lionaces.com)

Tel: (86-755)-28280690

**General product information**

|                                | Cell     |
|--------------------------------|----------|
| Model                          | FL400909 |
| Nominal capacity               | 25mAh    |
| Nominal voltage                | 3.7V     |
| Nominal charge current         | 5mA      |
| Nominal discharge current      | 5mA      |
| Maximum charge current         | 12.5mA   |
| Maximum discharge current      | 25mA     |
| Upper Limited Charging Voltage | 4.2V     |
| Cut-off voltage                | 3.0V     |

**Copy of marking plate**

This is reference label, final label should be including the content of it.

|                                     |              |
|-------------------------------------|--------------|
| Red(+)                              | Black (-)    |
| Lithium Ion Cell                    | FL400909     |
| 3.7V, 25mAh, 0.0925Wh               | ICP5/10/10   |
| Made in China                       | Date: YYMMDD |
| Warning: Risk of Fire and Burns.    |              |
| Follow Manufacturer's Instructions. |              |

**Caution for ingestion of small batteries**

- Keep small cells and batteries which are considered swallowable out of the reach of children.
- Swallowing may lead to burns, perforation of soft tissue, and death. Severe burns can occur within 2 h of ingestion.
- In case of ingestion of a cell or battery, seek medical assistance promptly.



.com

Add: 301, Building B6, Junfeng Industrial Zone, Yonghe Road, Heping Community, Fuhai Street, Baoan District, Shenzhen, Guangdong, China.


Website: www.lionaces.com

E-mail: service@lionaces.com

Tel: (86-755)-28280690



**Construction**

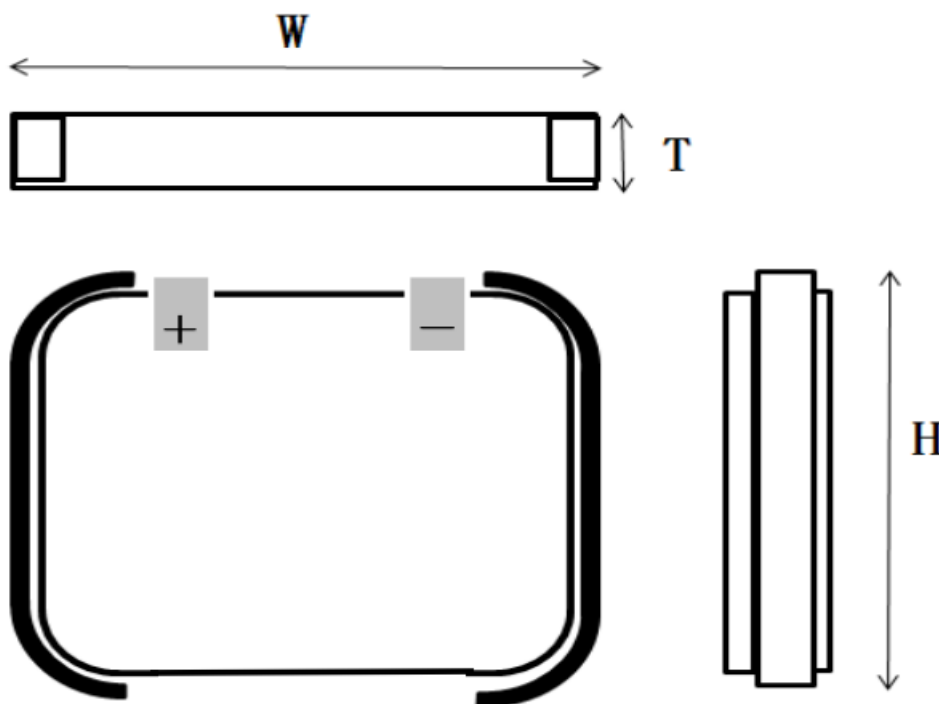

| 项目 | 描述 | 尺寸        |
|----|----|-----------|
| T  | 厚度 | 4.2mm max |
| W  | 宽度 | 9.2mm max |
| L  | 长度 | 9.2mm max |

Cell(mm)



.com

Add: 301, Building B6, Junfeng Industrial Zone, Yonghe Road, Heping Community, Fuhai Street, Baoan District, Shenzhen, Guangdong, China.

Website: www.lionaces.com

E-mail: service@lionaces.com

Tel: (86-755)-28280690

| IEC 62133-2:2017, IEC 62133-2:2017/AMD1:2021 |  |  |          |
|--|--|--|----------|
| Clause                                       | Requirement – Test   | Result – Remark  | Verdict  |
| <b>4</b>                                     | <b>Parameter measurement tolerances</b>  |  | <b>P</b> |
|  | Parameter measurement tolerances   | Comply with relevant requirements.                         | P        |
| <b>5</b>                                     | <b>General safety considerations</b>   |  | <b>P</b> |
| <b>5.1</b>                                   | <b>General</b>   |  | <b>P</b> |
|  | Cells and batteries so designed and constructed that they are safe under conditions of both intended use and reasonably foreseeable misuse   |  | P        |
| <b>5.2</b>                                   | <b>Insulation and wiring</b>   |  | <b>P</b> |
|  | The insulation resistance between the positive terminal and externally exposed metal surfaces of the battery (excluding electrical contact surfaces) is not less than 5 MΩ   | No metal case exists.                                      | N/A      |
|  | Insulation resistance (MΩ) .....   |  | —        |
|  | Internal wiring and insulation are sufficient to withstand maximum anticipated current, voltage and temperature requirements   |  | P        |
|  | Orientation of wiring maintains adequate clearance and creepage distances between conductors   |  | P        |
|  | Mechanical integrity of internal connections accommodates reasonably foreseeable misuse  |  | P        |
| <b>5.3</b>                                   | <b>Venting</b>   |  | <b>P</b> |
|  | Battery cases and cells incorporate a pressure relief mechanism or are constructed so that they relieve excessive internal pressure at a value and rate that will preclude rupture, explosion and self-ignition            | Venting mechanism exists on the narrow side of pouch cell. | P        |
|  | Encapsulation used to support cells within an outer casing does not cause the battery to overheat during normal operation nor inhibit pressure relief  |  | N/A      |
| <b>5.4</b>                                   | <b>Temperature, voltage and current management</b>   | Cell only.   | N/A      |
|  | Batteries are designed such that abnormal temperature rise conditions are prevented  |  | N/A      |
|  | Batteries are designed to be within temperature, voltage and current limits specified by the cell manufacturer   |  | N/A      |
|  | Batteries are provided with specifications and charging instructions for equipment manufacturers so that specified chargers are designed to maintain charging within the temperature, voltage and current limits specified |  | N/A      |
| <b>5.5</b>                                   | <b>Terminal contacts</b>   |  | <b>P</b> |



.com

Add: 301, Building B6, Junfeng Industrial Zone, Yonghe Road, Heping Community, Fuhai Street, Baoan District, Shenzhen, Guangdong, China.

Website: www.lionaces.com

E-mail: service@lionaces.com

Tel: (86-755)-28280690

| IEC 62133-2:2017, IEC 62133-2:2017/AMD1:2021 |  |                             |         |
|--|--|-----------------------------|---------|
| Clause                                       | Requirement – Test   | Result – Remark             | Verdict |
|  | The size and shape of the terminal contacts ensure that they can carry the maximum anticipated current   | Complied. DC electrode tab. | P       |
|  | External terminal contact surfaces are formed from conductive materials with good mechanical strength and corrosion resistance   |                             | P       |
|  | Terminal contacts are arranged to minimize the risk of short-circuit   |                             | P       |
| <b>5.6</b>                                   | <b>Assembly of cells into batteries</b>  | Cell only.                  | N/A     |
| <b>5.6.1</b>                                 | <b>General</b>   |                             | N/A     |
|  | Each battery have an independent control and protection for current, voltage, temperature and any other parameter required for safety and to maintain the cells within their operating region  |                             | N/A     |
|  | This protection may be provided external to the battery such as within the charger or the end devices  |                             | N/A     |
|  | If protection is external to the battery, the manufacturer of the battery provide this safety relevant information to the external device manufacturer for implementation  |                             | N/A     |
|  | If there is more than one battery housed in a single battery case, each battery have protective circuitry that can maintain the cells within their operating regions   |                             | N/A     |
|  | Manufacturers of cells specify current, voltage and temperature limits so that the battery manufacturer/ designer may ensure proper design and assembly  |                             | N/A     |
|  | Batteries that are designed for the selective discharge of a portion of their series connected cells incorporate circuitry to prevent operation of cells outside the limits specified by the cell manufacturer                             |                             | N/A     |
|  | Protective circuit components added as appropriate and consideration given to the end-device application   |                             | N/A     |
|  | The manufacturer of the battery provide a safety analysis of the battery safety circuitry with a test report including a fault analysis of the protection circuit under both charging and discharging conditions confirming the compliance |                             | N/A     |
| <b>5.6.2</b>                                 | <b>Design recommendation</b>   |                             | N/A     |
|  | For the battery consisting of a single cell or a single cellblock, it is recommended that the charging voltage of the cell does not exceed the upper limit of the charging voltage specified in Table 2                                    |                             | N/A     |



| IEC 62133-2:2017, IEC 62133-2:2017/AMD1:2021 |  |                 |          |
|--|--|-----------------|----------|
| Clause                                       | Requirement – Test   | Result – Remark | Verdict  |
|  | For the battery consisting of series-connected plural single cells or series-connected plural cellblocks, it is recommended that the voltages of any one of the single cells or single cellblocks does not exceed the upper limit of the charging voltage, specified in Table 2, by monitoring the voltage of every single cell or the single cellblocks |                 | N/A      |
|  | For the battery consisting of series-connected plural single cells or series-connected plural cellblocks, it is recommended that charging is stopped when the upper limit of the charging voltage is exceeded for any one of the single cells or single cellblocks by measuring the voltage of every single cell or the single cellblocks                |                 | N/A      |
|  | For batteries consisting of series-connected cells or cell blocks, nominal charge voltage not be counted as an overcharge protection   |                 | N/A      |
|  | For batteries consisting of series-connected cells or cell blocks, cells have closely matched capacities, be of the same design, be of the same chemistry and be from the same manufacturer  |                 | N/A      |
|  | It is recommended that the cells and cell blocks not discharged beyond the cell manufacturer's specified final voltage   |                 | N/A      |
|  | For batteries consisting of series-connected cells or cell blocks, cell balancing circuitry incorporated into the battery management system  |                 | N/A      |
| <b>5.6.3</b>                                 | <b>Mechanical protection for cells and components of batteries</b>   |                 | N/A      |
|  | Mechanical protection for cells, cell connections and control circuits within the battery provided to prevent damage as a result of intended use and reasonably foreseeable misuse   |                 | N/A      |
|  | The mechanical protection can be provided by the battery case or it can be provided by the end product enclosure for those batteries intended for building into an end product   |                 | N/A      |
|  | The battery case and compartments housing cells designed to accommodate cell dimensional tolerances during charging and discharging as recommended by the cell manufacturer  |                 | N/A      |
|  | For batteries intended for building into a portable end product, testing with the battery installed within the end product considered when conducting mechanical tests   |                 | N/A      |
| <b>5.7</b>                                   | <b>Quality plan</b>  |                 | <b>P</b> |



## IEC 62133-2:2017, IEC 62133-2:2017/AMD1:2021

| Clause     | Requirement – Test  | Result – Remark | Verdict    |
|------------|---|-----------------|------------|
|            | The manufacturer prepares and implements a quality plan that defines procedures for the inspection of materials, components, cells and batteries and which covers the whole process of producing each type of cell or battery | Complied.       | P          |
| <b>5.8</b> | <b>Battery safety components</b>  | Cell only.      | <b>N/A</b> |
|            | According annex F   |                 | N/A        |

| <b>6</b> | <b>Type test and sample size</b>   |                                      | <b>P</b> |
|----------|--|--------------------------------------|----------|
|          | Tests are made with the number of cells or batteries specified in Table 1 using cells or batteries that are not more than six months old   |                                      | P        |
|          | The internal resistance of coin cells are measured in accordance with Annex D. Coin cells with internal resistance less than or equal to 3 Ω are tested in accordance with Table 1                     | Prismatic cell                       | N/A      |
|          | Unless otherwise specified, tests are carried out in an ambient temperature of 20 °C ± 5 °C  | Tests are carried out at 20°C ± 5°C. | P        |
|          | The safety analysis of 5.6.1 identify those components of the protection circuit that are critical for short-circuit, overcharge and overdischarge protection  |                                      | N/A      |
|          | When conducting the short-circuit test, consideration given to the simulation of any single fault condition that is likely to occur in the protecting circuit that would affect the short-circuit test |                                      | N/A      |

| <b>7</b>     | <b>Specific requirements and tests</b>   |             | <b>P</b> |
|--------------|--|-------------|----------|
| <b>7.1</b>   | <b>Charging procedure for test purposes</b>  |             | <b>P</b> |
| <b>7.1.1</b> | <b>First procedure</b>   |             | <b>P</b> |
|              | This charging procedure applies to subclauses other than those specified in 7.1.2  |             | P        |
|              | Unless otherwise stated in this document, the charging procedure for test purposes is carried out in an ambient temperature of 20 °C ± 5 °C, using the method declared by the manufacturer | See page 3. | P        |
|              | Prior to charging, the battery have been discharged at 20 °C ± 5 °C at a constant current of 0,2 It A down to a specified final voltage  | See page 3. | P        |
| <b>7.1.2</b> | <b>Second procedure</b>  |             | <b>P</b> |
|              | This charging procedure applies only to 7.3.1, 7.3.4, 7.3.5, and 7.3.9   |             | P        |



.com

Add: 301, Building B6, Junfeng Industrial Zone, Yonghe Road, Heping Community, Fuhai Street, Baoan District, Shenzhen, Guangdong, China.

Website: www.lionaces.com

E-mail: service@lionaces.com

Tel: (86-755)-28280690

| IEC 62133-2:2017, IEC 62133-2:2017/AMD1:2021 |  |                            |          |
|--|--|----------------------------|----------|
| Clause                                       | Requirement – Test   | Result – Remark            | Verdict  |
|  | After stabilization for 1 h and 4 h, respectively, at ambient temperature of highest test temperature and lowest test temperature, as specified in Table 2, cells are charged by using the upper limit charging voltage and maximum charging current, until the charging current is reduced to 0,05 It A, using a constant voltage charging method |                            | P        |
| <b>7.2</b>                                   | <b>Intended use</b>  |                            | <b>P</b> |
| <b>7.2.1</b>                                 | <b>Continuous charging at constant voltage (cells)</b>   |                            | <b>P</b> |
|  | Fully charged cells are subjected for 7 days to a charge using the charging method for current and standard voltage specified by the cell manufacturer   | Tested complied.           | P        |
|  | Results: No fire. No explosion. No leakage ..... :   | (See appended table 7.2.1) | P        |
| <b>7.2.2</b>                                 | <b>Case stress at high ambient temperature (battery)</b>   | Cell only.                 | N/A      |
|  | Oven temperature (°C) ..... :  |                            | —        |
|  | Results: No physical distortion of the battery case resulting in exposure of internal protective components and cells  |                            | N/A      |
| <b>7.3</b>                                   | <b>Reasonably foreseeable misuse</b>   |                            | <b>P</b> |
| <b>7.3.1</b>                                 | <b>External short-circuit (cell)</b>   | Tested complied.           | <b>P</b> |
|  | The cells were tested until one of the following occurred:   |                            | P        |
|  | - 24 hours elapsed; or   |                            | N/A      |
|  | - The case temperature declined by 20 % of the maximum temperature rise  |                            | P        |
|  | Results: No fire. No explosion ..... :   | (See appended table 7.3.1) | P        |
| <b>7.3.2</b>                                 | <b>External short-circuit (battery)</b>  | Cell only                  | N/A      |
|  | The batteries were tested until one of the following occurred:   |                            | N/A      |
|  | - 24 hours elapsed; or   |                            | N/A      |
|  | - The case temperature declined by 20 % of the maximum temperature rise  |                            | N/A      |
|  | In case of rapid decline in short circuit current, the battery pack remained on test for an additional one hour after the current reached a low end steady state condition   |                            | N/A      |
|  | A single fault in the discharge protection circuit conducted on one to four (depending upon the protection circuit) of the five samples before conducting the short-circuit test   |                            | N/A      |



.com

Add: 301, Building B6, Junfeng Industrial Zone, Yonghe Road, Heping Community, Fuhai Street, Baoan District, Shenzhen, Guangdong, China.

Website: www.lionaces.com

E-mail: service@lionaces.com

Tel: (86-755)-28280690

| IEC 62133-2:2017, IEC 62133-2:2017/AMD1:2021 |  |                            |            |
|--|--|----------------------------|------------|
| Clause                                       | Requirement – Test   | Result – Remark            | Verdict    |
|  | A single fault applies to protective component parts such as MOSFET, fuse, thermostat or positive temperature coefficient (PTC) thermistor |                            | N/A        |
|  | Results: No fire. No explosion .....   | (See appended table 7.3.2) | N/A        |
| <b>7.3.3</b>                                 | <b>Free fall</b>   |                            | <b>P</b>   |
|  | Results: No fire. No explosion   | No fire. No explosion      | P          |
| <b>7.3.4</b>                                 | <b>Thermal abuse (cells)</b>   |                            | <b>P</b>   |
|  | Oven temperature (°C) .....  | 130°C                      | —          |
|  | Results: No fire. No explosion   | No fire. No explosion      | P          |
| <b>7.3.5</b>                                 | <b>Crush (cells)</b>   |                            | <b>P</b>   |
|  | The crushing force was released upon:  |                            | P          |
|  | - The maximum force of 13 kN ± 0,78 kN has been applied; or  |                            | N/A        |
|  | - An abrupt voltage drop of one-third of the original voltage has been obtained  |                            | P          |
|  | Results: No fire. No explosion .....   | (See appended table 7.3.5) | P          |
| <b>7.3.6</b>                                 | <b>Over-charging of battery</b>  |                            | <b>N/A</b> |
|  | The supply voltage which is:   |                            | --         |
|  | - 1,4 times the upper limit charging voltage presented in Table A.1 (but not to exceed 6,0 V) for single cell/cell block batteries or      |                            | N/A        |
|  | - 1,2 times the upper limit charging voltage resented in Table A.1 per cell for series connected multi-cell batteries, and                 |                            | N/A        |
|  | - Sufficient to maintain a current of 2,0 It A throughout the duration of the test or until the supply voltage is reached                  |                            | N/A        |
|  | Test was continued until the temperature of the outer casing:  |                            | N/A        |
|  | - Reached steady state conditions (less than 10 °C change in 30-minute period); or   |                            | N/A        |
|  | - Returned to ambient  |                            | N/A        |
|  | Results: No fire. No explosion .....   | (See appended table 7.3.6) | N/A        |
| <b>7.3.7</b>                                 | <b>Forced discharge (cells)</b>  |                            | <b>P</b>   |
|  | Discharge a single cell to the lower limit discharge voltage specified by the cell manufacturer  |                            | P          |
|  | The discharged cell is then subjected to a forced discharge at 1 It A to the negative value of the upper limit charging voltage            |                            | P          |



.com

Add: 301, Building B6, Junfeng Industrial Zone, Yonghe Road, Heping Community, Fuhai Street, Baoan District, Shenzhen, Guangdong, China.

Website: www.lionaces.com

E-mail: service@lionaces.com

Tel: (86-755)-28280690

| IEC 62133-2:2017, IEC 62133-2:2017/AMD1:2021 |   |                                   |         |
|--|---|-----------------------------------|---------|
| Clause                                       | Requirement – Test  | Result – Remark                   | Verdict |
|  | - The discharge voltage reaches the negative value of upper limit charging voltage within the testing duration. The voltage is maintained at the negative value of the upper limit charging voltage by reducing the current for the remainder of the testing duration |                                   | N/A     |
|  | - The discharge voltage does not reach the negative value of upper limit charging voltage within the testing duration. The test is terminated at the end of the testing duration  |                                   | P       |
|  | Results: No fire. No explosion .....  | (See appended table 7.3.7)        | P       |
| <b>7.3.8</b>                                 | <b>Mechanical tests (batteries)</b>   | Cell only                         | N/A     |
| <b>7.3.8.1</b>                               | <b>Vibration</b>  |                                   | N/A     |
|  | Results: No fire, no explosion, no rupture, no leakage or venting.....  | (See appended table 7.3.8.1)      | N/A     |
| <b>7.3.8.2</b>                               | <b>Mechanical shock</b>   |                                   | N/A     |
|  | Results: No leakage, no venting, no rupture, no explosion and no fire.....  | (See appended table 7.3.8.2)      | N/A     |
| <b>7.3.9</b>                                 | <b>Design evaluation – Forced internal short-circuit (cells)</b>  |                                   | P       |
|  | The cells complied with national requirement for..... :   | France, Japan, Korea, Switzerland | —       |
|  | The pressing was stopped upon:  |                                   | P       |
|  | - A voltage drop of 50 mV has been detected; or   |                                   | P       |
|  | - The pressing force of 800 N (cylindrical cells) or 400 N (prismatic cells) has been reached   | 400N                              | P       |
|  | Results: No fire.....   | (See appended table 7.3.9)        | P       |

|            |   |  |          |
|------------|---|--|----------|
| <b>8</b>   | <b>Information for safety</b>   |  | <b>P</b> |
| <b>8.1</b> | <b>General</b>  |  | <b>P</b> |
|            | Manufacturers of secondary cells provides information about current, voltage and temperature limits of their products                                 | Information for safety mentioned in manufacturer's specifications. | P        |
|            | Manufacturers of batteries provides information regarding how to minimize and mitigate hazards to equipment manufacturers or end-users                | Information for safety mentioned in manufacturer's specifications. | P        |
|            | Systems analyses performed by device manufacturers to ensure that a particular battery design prevents hazards from occurring during use of a product |  | N/A      |
|            | As appropriate, any information relating to hazard avoidance resulting from a system analysis provided to the end user                                |  | N/A      |



.com

Add: 301, Building B6, Junfeng Industrial Zone, Yonghe Road, Heping Community, Fuhai Street, Baoan District, Shenzhen, Guangdong, China.

Website: www.lionaces.com

E-mail: service@lionaces.com

Tel: (86-755)-28280690



| IEC 62133-2:2017, IEC 62133-2:2017/AMD1:2021 |  |                 |          |
|--|--|-----------------|----------|
| Clause                                       | Requirement – Test   | Result – Remark | Verdict  |
| <b>8.2</b>                                   | <b>Small cell and battery safety information</b>   | Small cell.     | <b>P</b> |
|  | The following warning language is to be provided with the information packaged with the small cells and batteries or equipment using them: |                 | P        |
|  | - Keep small cells and batteries which are considered swallowable out of the reach of children   |                 | P        |
|  | - Swallowing may lead to burns, perforation of soft tissue, and death. Severe burns can occur within 2 h of ingestion                      |                 | P        |
|  | - In case of ingestion of a cell or battery, seek medical assistance promptly  |                 | P        |

|            |   |                            |          |
|------------|---|----------------------------|----------|
| <b>9</b>   | <b>Marking</b>  |                            | <b>P</b> |
| <b>9.1</b> | <b>Cell marking</b>   |                            | <b>P</b> |
|            | Cells marked as specified in IEC 61960, except coin cells   | The final product is cell. | P        |
|            | Coin cells whose external surface area is too small to accommodate the markings on the cells show the designation and polarity  |                            | P        |
|            | By agreement between the cell manufacturer and the battery and/or end product manufacturer, component cells used in the manufacture of a battery need not be marked                                 |                            | N/A      |
| <b>9.2</b> | <b>Battery marking</b>  | Cell only                  | N/A      |
|            | Batteries marked as specified in IEC 61960, except for coin batteries   |                            | N/A      |
|            | Coin batteries whose external surface area is too small to accommodate the markings on the batteries show the designation and polarity. Batteries also marked with an appropriate caution statement |                            | N/A      |
|            | Batteries are marked with an appropriate caution statement  |                            | N/A      |
|            | - Terminals have clear polarity marking on the external surface of the battery, or  |                            | N/A      |
|            | - Not be marked with polarity markings if the design of the external connector prevents reverse polarity connections  |                            | N/A      |
| <b>9.3</b> | <b>Caution for ingestion of small cells and batteries</b>   | Not consumer replaceable   | N/A      |
|            | Coin cells and batteries identified as small batteries according to 8.2 include a caution statement regarding the hazards of ingestion in accordance with 8.2                                       |                            | N/A      |



| IEC 62133-2:2017, IEC 62133-2:2017/AMD1:2021 |  |                 |          |
|--|--|-----------------|----------|
| Clause                                       | Requirement – Test   | Result – Remark | Verdict  |
|  | When small cells and batteries are intended for direct sale in consumer-replaceable applications, caution for ingestion given on the immediate package |                 | N/A      |
| <b>9.4</b>                                   | <b>Other information</b>   |                 | <b>P</b> |
|  | The following information are marked on or supplied with the battery:  |                 | <b>P</b> |
|  | Storage and disposal instructions  |                 | P        |
|  | Recommended charging instructions  |                 | P        |

|           |   |  |            |
|-----------|---|--|------------|
| <b>10</b> | <b>Packaging and transport</b>  |  | <b>N/A</b> |
|           | Packaging for coin cells not small enough to fit within the limits of the ingestion gauge of Figure 3 |  | N/A        |

|                |   |   |          |
|----------------|---|---|----------|
| <b>Annex A</b> | <b>Charging and discharging range of secondary lithium ion cells for safe use</b>       |   | <b>P</b> |
| <b>A.1</b>     | <b>General</b>  |   | <b>P</b> |
| <b>A.2</b>     | <b>Safety of lithium ion secondary battery</b>  |   | <b>P</b> |
| <b>A.3</b>     | <b>Consideration on charging voltage</b>  |   | <b>P</b> |
| A.3.1          | General   | Charging voltage is 4.2V  | P        |
| A.3.2          | Upper limit charging voltage  | 4.2V  | P        |
| A.3.2.1        | General   |   | P        |
| A.3.2.2        | Explanation of safety viewpoint   | 4.2V applied.   | N/A      |
| A.3.2.3        | Safety requirements, when different upper limit charging voltage is applied             |   | N/A      |
| <b>A.4</b>     | <b>Consideration of temperature and charging current</b>                                |   | <b>P</b> |
| A.4.1          | General   |   | P        |
| A.4.2          | Recommended temperature range   | Charging temperature declared by client is: 0-45°C.               | P        |
| A.4.2.1        | General   |   | P        |
| A.4.2.2        | Safety consideration when a different recommended temperature range is applied          |   | P        |
| A.4.3          | High temperature range  | Not higher than the temperature range specified in this standard. | N/A      |
| A.4.3.1        | General   |   | N/A      |
| A.4.3.2        | Explanation of safety viewpoint   |   | N/A      |
| A.4.3.3        | Safety considerations when specifying charging conditions in the high temperature range |   | N/A      |



| IEC 62133-2:2017, IEC 62133-2:2017/AMD1:2021 |   |  |          |
|--|---|--|----------|
| Clause                                       | Requirement – Test  | Result – Remark                                      | Verdict  |
| A.4.3.4                                      | Safety considerations when specifying a new upper limit in the high temperature range         |  | N/A      |
| A.4.4  | Low temperature range   | Charging low temperature declared by client is: 0°C. | P        |
| A.4.4.1                                      | General   |  | P        |
| A.4.4.2                                      | Explanation of safety viewpoint   |  | P        |
| A.4.4.3                                      | Safety considerations, when specifying charging conditions in the low temperature range       |  | P        |
| A.4.4.4                                      | Safety considerations when specifying a new lower limit in the low temperature range          | -5°C applied.  | P        |
| A.4.5  | Scope of the application of charging current  |  | P        |
| A.4.6  | Consideration of discharge  |  | P        |
| A.4.6.1                                      | General   |  | P        |
| A.4.6.2                                      | Final discharge voltage and explanation of safety viewpoint                                   |  | P        |
| A.4.6.3                                      | Discharge current and temperature range   |  | P        |
| A.4.6.4                                      | Scope of application of the discharging current   |  | P        |
| <b>A.5</b>                                   | <b>Sample preparation</b>   |  | <b>P</b> |
| A.5.1  | General   |  | P        |
| A.5.2  | Insertion procedure for nickel particle to generate internal short                            |  | P        |
| A.5.3  | Disassembly of charged cell   |  | P        |
| A.5.4  | Shape of nickel particle  |  | P        |
| A.5.5  | Insertion of nickel particle in cylindrical cell  |  | N/A      |
| A.5.5.1                                      | Insertion of nickel particle in winding core  |  | N/A      |
| A.5.5.2                                      | Marking the position of the nickel particle on both ends of the winding core of the separator |  | N/A      |
| A.5.6  | Insertion of nickel particle in prismatic cell  |  | P        |
| <b>A.6</b>                                   | <b>Experimental procedure of the forced internal short-circuit test</b>                       |  | <b>P</b> |
| A.6.1  | Material and tools for preparation of nickel particle   |  | P        |
| A.6.2  | Example of a nickel particle preparation procedure  |  | P        |
| A.6.3  | Positioning (or placement) of a nickel particle   |  | P        |
| A.6.4  | Damaged separator precaution  |  | P        |
| A.6.5  | Caution for rewinding separator and electrode   |  | P        |
| A.6.6  | Insulation film for preventing short-circuit  |  | P        |
| A.6.7  | Caution when disassembling a cell   |  | P        |



| IEC 62133-2:2017, IEC 62133-2:2017/AMD1:2021 |   |                 |         |
|--|---|-----------------|---------|
| Clause                                       | Requirement – Test  | Result – Remark | Verdict |
| A.6.8  | Protective equipment for safety                                       |                 | P       |
| A.6.9  | Caution in the case of fire during disassembling                      |                 | P       |
| A.6.10                                       | Caution for the disassembling process and pressing the electrode core |                 | P       |
| A.6.11                                       | Recommended specifications for the pressing device                    |                 | P       |

|                |  |            |
|----------------|--|------------|
| <b>Annex B</b> | <b>Recommendations to equipment manufacturers and battery assemblers</b> | <b>N/A</b> |
|----------------|--|------------|

|                |   |            |
|----------------|---|------------|
| <b>Annex C</b> | <b>Recommendations to the end-users</b> | <b>N/A</b> |
|----------------|---|------------|

|                |  |                          |            |
|----------------|--|--------------------------|------------|
| <b>Annex D</b> | <b>Measurement of the internal ac resistance for coin cells</b>  |                          | <b>N/A</b> |
| <b>D.1</b>     | <b>General</b>   |                          | N/A        |
| <b>D.2</b>     | <b>Method</b>  |                          | N/A        |
|                | A sample size of three coin cells is required for this measurement .....   | (See appended table D.2) | N/A        |
|                | Coin cells with an internal resistance of less than or equal to 3 Ω are subjected to the testing according to Clause 6 and Table 1 |                          | N/A        |
|                | Coin cells with an internal resistance greater than 3 Ω require no further testing   |                          | N/A        |

|                |                                |            |
|----------------|--------------------------------|------------|
| <b>Annex E</b> | <b>Packaging and transport</b> | <b>N/A</b> |
|----------------|--------------------------------|------------|

|                |                                       |            |
|----------------|---------------------------------------|------------|
| <b>Annex F</b> | <b>Component standards references</b> | <b>N/A</b> |
|----------------|---------------------------------------|------------|



.com

Add: 301, Building B6, Junfeng Industrial Zone, Yonghe Road, Heping Community, Fuhai Street, Baoan District, Shenzhen, Guangdong, China.

Website: www.lionaces.com

E-mail: service@lionaces.com

Tel: (86-755)-28280690

| Table: Critical components information  |  |            |   |                             | P                     |
|---|--|------------|---|-----------------------------|-----------------------|
| Object/part no.   | Manufacturer/trademark                         | Type/model | Technical data  | Standard                    | Mark(s) of conformity |
| Cell  |  | FL400909   | 3.7V, 25mAh, 0.0925Wh   | IEC 62133-2:2017/AM D1:2021 | Tested with appliance |
| Positive electrode  | Jiangmen Keheng Industrial Co., LTD            | LCO-103    | LiCoO <sub>2</sub> , Dimensions: 240mm*29mm*0.138mm<br>Specific capacity: 142mAh/g      | --                          | --                    |
| Negative electrode  | Shenzhen Liyuan New Energy Technology Co., LTD | LY-960     | Material: Graphite<br>Dimensions: 261 mm *29 mm* 0.105mm<br>Specific capacity: 355mAh/g | --                          | --                    |
| Electrolyte   | Zhuhai light rui new material                  | GR-B670    | Composition: LiPF <sub>6</sub> +EC+DMC+EMC<br>Conductivity: 8.5S/cm                     | --                          | --                    |
| Separator   | Shenzhen Shunjia Energy Co., Ltd               | 16μm       | PP&PE&PP Dimensions: 604mm*31mm*0.016mm<br>Shut down temperature: 130°C                 | --                          | --                    |
| Supplementary information:<br>1) Provided evidence ensures the agreed level of compliance. See OD-CB2039. |  |            |   |                             |                       |



.com

Add: 301, Building B6, Junfeng Industrial Zone, Yonghe Road, Heping Community, Fuhai Street, Baoan District, Shenzhen, Guangdong, China.

Website: www.lionaces.com

E-mail: service@lionaces.com

Tel: (86-755)-28280690

| 7.2.1 Table: Continuous charging at constant voltage (cells) |                                       |   |                       | P       |
|--|---------------------------------------|---|-----------------------|---------|
| Sample no.   | Recommended charging voltage Vc (Vdc) | Recommended charging current I <sub>rec</sub> (A) | OCV before test (Vdc) | Results |
| C001   | 4.2                                   | 0.005   | 4.176                 | P       |
| C002   | 4.2                                   | 0.005   | 4.179                 | P       |
| C003   | 4.2                                   | 0.005   | 4.181                 | P       |
| C004   | 4.2                                   | 0.005   | 4.182                 | P       |
| C005   | 4.2                                   | 0.005   | 4.178                 | P       |

**Supplementary information:**  
- No fire or explosion  
- No leakage

| 7.3.1 Table: External short-circuit (cell)                       |                |                       |                            |                                       | P       |
|--|----------------|-----------------------|----------------------------|---------------------------------------|---------|
| Sample no.   | Ambient T (°C) | OCV before test (Vdc) | Resistance of circuit (mΩ) | Maximum case temperature rise ΔT (°C) | Results |
| <b>Samples charged at charging temperature upper limit: 45°C</b> |                |                       |                            |                                       |         |
| C006   | 55.4           | 4.173                 | 83.2                       | 103.3                                 | P       |
| C007   | 55.4           | 4.176                 | 78.6                       | 110.1                                 | P       |
| C008   | 55.4           | 4.178                 | 81.4                       | 108.3                                 | P       |
| C009   | 55.4           | 4.170                 | 81.9                       | 110.7                                 | P       |
| C010   | 55.4           | 4.174                 | 79.7                       | 106.8                                 | P       |
| <b>Samples charged at charging temperature lower limit: -5°C</b> |                |                       |                            |                                       |         |
| C011   | 55.1           | 4.134                 | 83.2                       | 111.1                                 | P       |
| C012   | 55.1           | 4.138                 | 78.6                       | 109.2                                 | P       |
| C013   | 55.1           | 4.146                 | 81.4                       | 110.8                                 | P       |
| C014   | 55.1           | 4.133                 | 81.9                       | 107.7                                 | P       |
| C015   | 55.1           | 4.141                 | 79.7                       | 104.9                                 | P       |

**Supplementary information:**  
- No fire or explosion



.com

Add: 301, Building B6, Junfeng Industrial Zone, Yonghe Road, Heping Community, Fuhai Street, Baoan District, Shenzhen, Guangdong, China.

Website: www.lionaces.com

E-mail: service@lionaces.com

Tel: (86-755)-28280690

| 7.3.2 Table: External short-circuit (battery) |                |                       |                            |   |                                  | N/A     |
|---|----------------|-----------------------|----------------------------|---|----------------------------------|---------|
| Sample no.                                    | Ambient T (°C) | OCV before test (Vdc) | Resistance of circuit (mΩ) | Maximum case temperature rise $\Delta T$ (°C) | Component single fault condition | Results |
|   |                |                       |                            |   |                                  |         |
|   |                |                       |                            |   |                                  |         |
|   |                |                       |                            |   |                                  |         |
|   |                |                       |                            |   |                                  |         |
|   |                |                       |                            |   |                                  |         |
| <b>Supplementary information:</b>             |                |                       |                            |   |                                  |         |

| 7.3.5 Table: Crush (cells)                                       |                       |  |   |         | P |
|--|-----------------------|--|---|---------|---|
| Sample no.   | OCV before test (Vdc) | OCV at removal of crushing force (Vdc) | Maximum force applied to the cell during crush (kN) | Results |   |
| <b>Samples charged at charging temperature upper limit: 45°C</b> |                       |  |   |         |   |
| C016   | 4.172                 | 2.920                                  | 6.05  | P       |   |
| C017   | 4.177                 | 2.923                                  | 5.11  | P       |   |
| C018   | 4.174                 | 2.921                                  | 6.92  | P       |   |
| C019   | 4.179                 | 2.925                                  | 5.76  | P       |   |
| C020   | 4.173                 | 2.921                                  | 5.46  | P       |   |
| <b>Samples charged at charging temperature lower limit: -5°C</b> |                       |  |   |         |   |
| C021   | 4.138                 | 2.896                                  | 4.83  | P       |   |
| C022   | 4.144                 | 2.900                                  | 5.26  | P       |   |
| C023   | 4.145                 | 2.901                                  | 5.00  | P       |   |
| C024   | 4.139                 | 2.897                                  | 6.08  | P       |   |
| C025   | 4.140                 | 2.898                                  | 5.87  | P       |   |
| <b>Supplementary information:</b>                                |                       |  |   |         |   |
| - No fire or explosion   |                       |  |   |         |   |


[www.lionaces.com](http://www.lionaces.com)

Add: 301, Building B6, Junfeng Industrial Zone, Yonghe Road, Heping Community, Fuhai Street, Baoan District, Shenzhen, Guangdong, China.

 Website: [www.lionaces.com](http://www.lionaces.com)

 E-mail: [service@lionaces.com](mailto:service@lionaces.com)

Tel: (86-755)-28280690

| 7.3.6                               |                           | Table: Over-charging of battery |   |         | N/A |
|-------------------------------------|---------------------------|---------------------------------|---|---------|-----|
| Constant charging current (A) ..... |                           |                                 |   |         | —   |
| Supply voltage (Vdc) .....          |                           |                                 |   |         | —   |
| Sample no.                          | OCV before charging (Vdc) | Total charging time (minute)    | Maximum outer case temperature rise $\Delta T$ (°C) | Results |     |
|                                     |                           |                                 |   |         |     |
|                                     |                           |                                 |   |         |     |
|                                     |                           |                                 |   |         |     |
|                                     |                           |                                 |   |         |     |
| Supplementary information:          |                           |                                 |   |         |     |

| 7.3.7  |  | Table: Forced discharge (cells)   |                                     |         | P |
|--|--|-----------------------------------|-------------------------------------|---------|---|
| Sample no.   | OCV before application of reverse charge (Vdc) | Measured reverse charge $I_t$ (A) | Lower limit discharge voltage (Vdc) | Results |   |
| C026   | 3.336  | 0.025                             | -4.2                                | P       |   |
| C027   | 3.331  | 0.025                             | -4.2                                | P       |   |
| C028   | 3.335  | 0.025                             | -4.2                                | P       |   |
| C029   | 3.333  | 0.025                             | -4.2                                | P       |   |
| C030   | 3.337  | 0.025                             | -4.2                                | P       |   |
| Supplementary information:<br>- No fire or explosion |  |                                   |                                     |         |   |

| 7.3.8.1                    |                       | Table: Vibration     |                      |                     |         | N/A |
|----------------------------|-----------------------|----------------------|----------------------|---------------------|---------|-----|
| Sample no.                 | OCV before test (Vdc) | OCV after test (Vdc) | Mass before test (g) | Mass after test (g) | Results |     |
|                            |                       |                      |                      |                     |         |     |
|                            |                       |                      |                      |                     |         |     |
|                            |                       |                      |                      |                     |         |     |
| Supplementary information: |                       |                      |                      |                     |         |     |



.com

Add: 301, Building B6, Junfeng Industrial Zone, Yonghe Road, Heping Community, Fuhai Street, Baoan District, Shenzhen, Guangdong, China.

Website: www.lionaces.com

E-mail: service@lionaces.com

Tel: (86-755)-28280690



Lionaces Technology Co., Ltd.

| 7.3.8.2 Table: Mechanical shock |                       |                      |                      |                     | N/A     |
|---------------------------------|-----------------------|----------------------|----------------------|---------------------|---------|
| Sample no.                      | OCV before test (Vdc) | OCV after test (Vdc) | Mass before test (g) | Mass after test (g) | Results |
|                                 |                       |                      |                      |                     |         |
|                                 |                       |                      |                      |                     |         |
|                                 |                       |                      |                      |                     |         |

**Supplementary information:**

| 7.3.9 Table: Forced internal short circuit (cells)              |                        |                       |                                 |                              | P       |
|---|------------------------|-----------------------|---------------------------------|------------------------------|---------|
| Sample no.  | Chamber ambient T (°C) | OCV before test (Vdc) | Particle location <sup>1)</sup> | Maximum applied pressure (N) | Results |
| <b>Samples charged at charging temperature upper limit 45°C</b> |                        |                       |                                 |                              |         |
| C031  | 45                     | 4.171                 | 1                               | 400                          | P       |
| C032  | 45                     | 4.177                 | 1                               | 101.2                        | P       |
| C033  | 45                     | 4.174                 | 1                               | 93.7                         | P       |
| C034  | 45                     | 4.176                 | 2                               | 97.5                         | P       |
| C035  | 45                     | 4.179                 | 2                               | 115.0                        | P       |
| <b>Samples charged at charging temperature lower limit -5°C</b> |                        |                       |                                 |                              |         |
| C036  | -5                     | 4.139                 | 1                               | 99.4                         | P       |
| C037  | -5                     | 4.138                 | 1                               | 106.1                        | P       |
| C038  | -5                     | 4.140                 | 1                               | 400                          | P       |
| C039  | -5                     | 4.137                 | 2                               | 87.2                         | P       |
| C040  | -5                     | 4.141                 | 2                               | 400                          | P       |

**Supplementary information:**

<sup>1)</sup> Identify one of the following:

- 1: Nickel particle inserted between positive and negative (active material) coated area.
- 2: Nickel particle inserted between positive aluminium foil and negative active material coated area.


[www.lionaces.com](http://www.lionaces.com)

Add: 301, Building B6, Junfeng Industrial Zone, Yonghe Road, Heping Community, Fuhai Street, Baoan District, Shenzhen, Guangdong, China.

Website: www.lionaces.com

E-mail: service@lionaces.com

Tel: (86-755)-28280690

| D.2   | Table: Internal AC resistance for coin cells |                |                    |                       | N/A |
|---|--|----------------|--------------------|-----------------------|-----|
| Sample no.  | Ambient T (°C)                               | Store time (h) | Resistance Rac (Ω) | Results <sup>1)</sup> |     |
|   |  |                |                    |                       |     |
|   |  |                |                    |                       |     |
|   |  |                |                    |                       |     |
| <b>Supplementary information:</b><br><sup>1)</sup> Coin cells with internal resistance less than or equal to 3 Ω, see test result on corresponding tables |  |                |                    |                       |     |



.com



Add: 301, Building B6, Junfeng Industrial Zone, Yonghe Road, Heping Community, Fuhai Street, Baoan District, Shenzhen, Guangdong, China.

Website: www.lionaces.com

E-mail: service@lionaces.com

Tel: (86-755)-28280690

**Attachment A**  
**Photos of product**

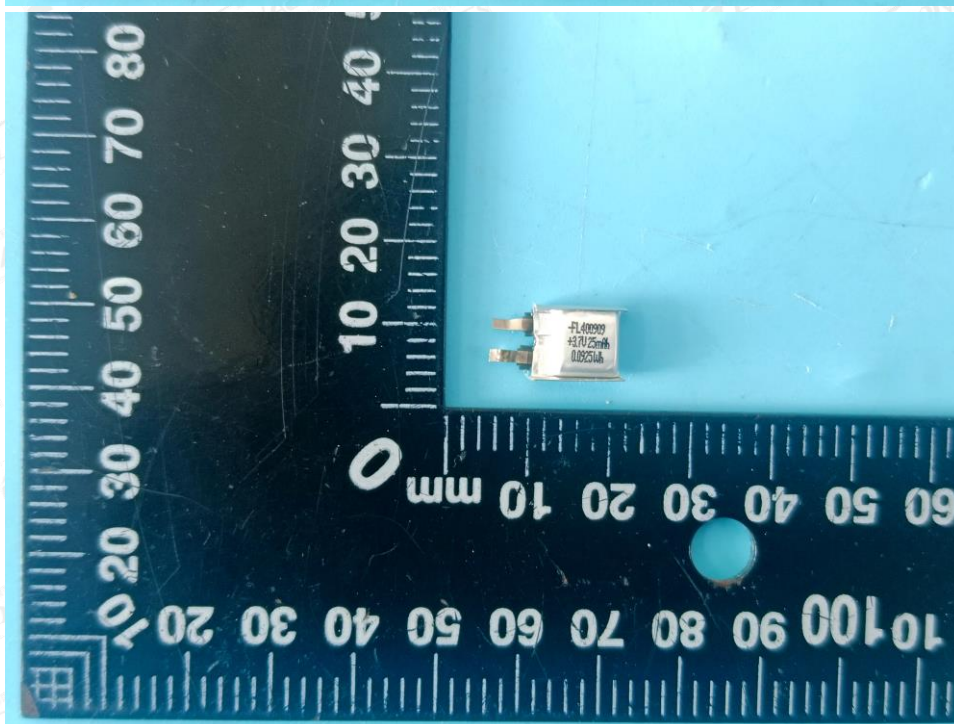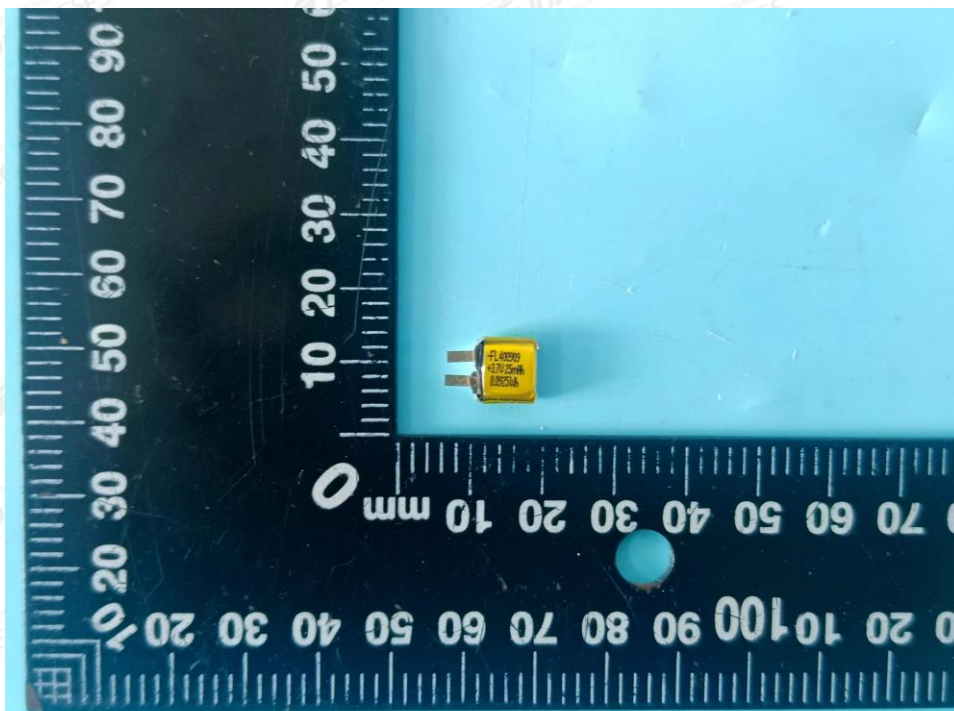

Front view of cell





.com

Add: 301, Building B6, Junfeng Industrial Zone, Yonghe Road, Heping Community, Fuhai Street, Baoan District, Shenzhen, Guangdong, China.

Website: www.lionaces.com

E-mail: service@lionaces.com

Tel: (86-755)-28280690

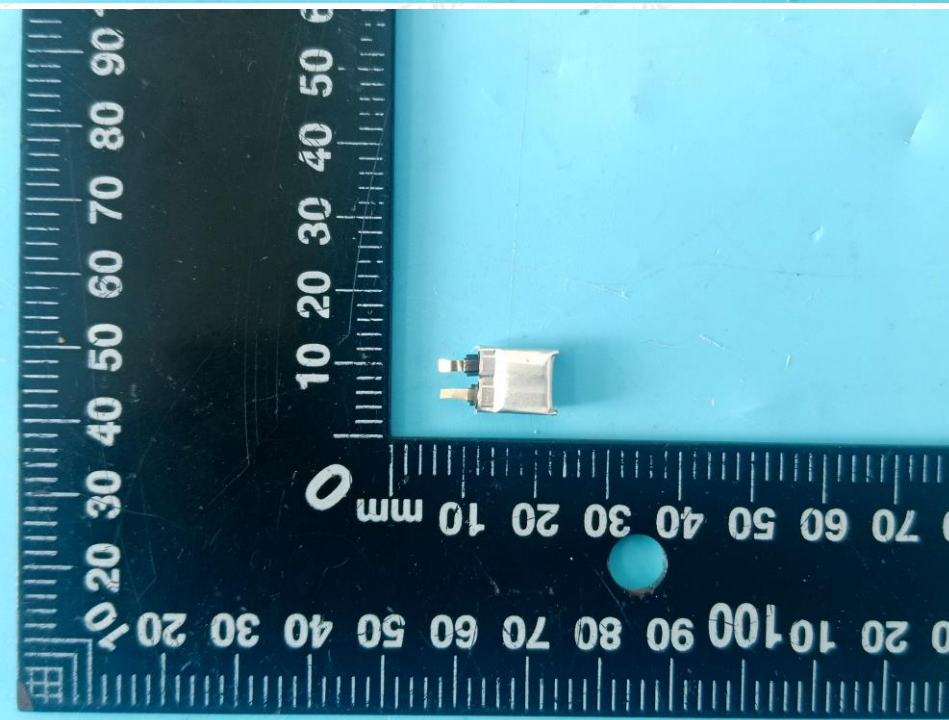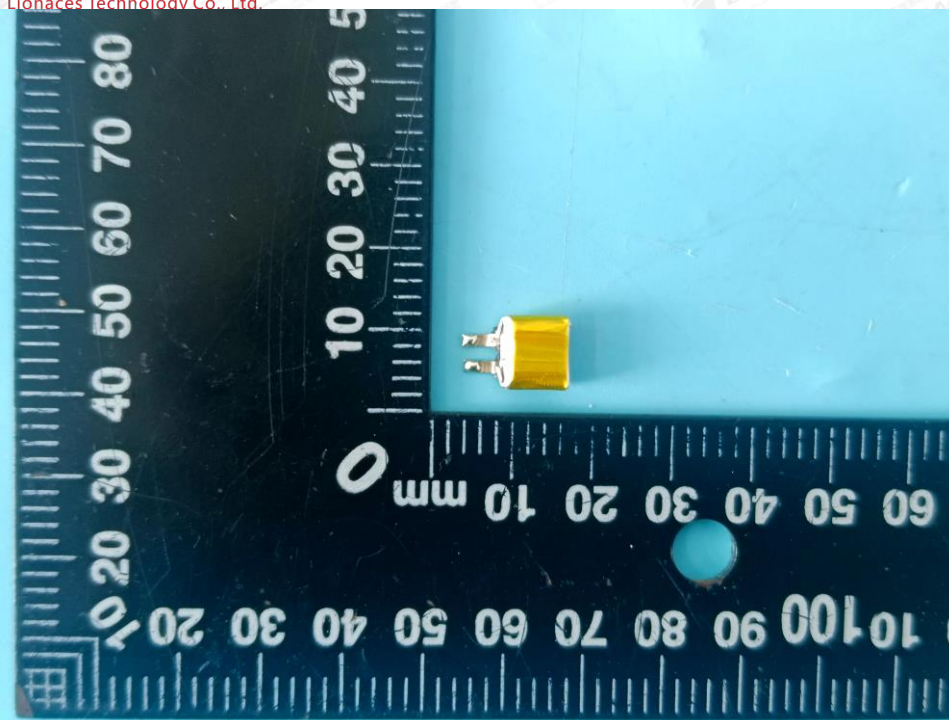

Back view of cell



.com

Add: 301, Building B6, Junfeng Industrial Zone, Yonghe Road, Heping Community, Fuhai Street, Baoan District, Shenzhen, Guangdong, China.

Website: [www.lionaces.com](http://www.lionaces.com)

E-mail: [service@lionaces.com](mailto:service@lionaces.com)

Tel: (86-755)-28280690

### Test Equipment

| No | Name                                      | Model specifications   | Device Number  | Calibration validity | Using (√) |
|----|---|------------------------|--|----------------------|-----------|
| 1  | High-performance battery detection system | CT-4008-5V6A-S1        | LA-BT-E070   | 2024-12-06           | √         |
| 2  | Digital temperature recorder              | GL240                  | LA-BT-E096   | 2025-03-16           | √         |
| 3  | Battery short circuit tester              | GX-055-B50             | LA-BT-E097   | 2025-03-16           | √         |
| 4  | Drop test system                          | FH-03                  | LA-BT-E010   | 2024-12-06           | √         |
| 5  | Battery thermal shock test box            | GX-3020-B              | LA-BT-E085   | 2024-12-06           | √         |
| 6  | Battery crush test instrument             | GX-5067-CSM            | LA-BT-E084   | 2024-12-06           | √         |
| 7  | Battery forced internal testing machine   | FH-07                  | LA-BT-E006   | 2024-12-06           | √         |
| 8  | DC power supply                           | UTP1306S               | LA-BT-E079<br>LA-BT-E080<br>LA-BT-E081<br>LA-BT-E082<br>LA-BT-E083 | 2024-12-06           | √         |
| 9  | Gauge                                     | H:57.1*h:25.4*R:31.7mm | LA-BT-E077   | 2024-12-08           | √         |

----END OF REPORT----



# IEC 62133-2 TEST REPORT

For  
Rechargeable Li-ion Battery  
Model: 502030

Prepared for:

Prepared by: Shenzhen NCT Testing Technology Co., Ltd.  
B2A101/B2A201/B2A202, Fuqiao 6th Area, Xintian, Fuhai Subdistrict,  
Bao'an District, Shenzhen, Guangdong, China  
TEL: +86-755-23218380

Report Number: NCT2404106011-1  
Date of Test: 2024-10-02 to 2024-10-16  
Date of Issue: 2024-10-17

Tested By: Miller Gao  
Miller Gao

Reviewed By: Miya Li  
Miya Li

Approved By: Boris Lin  
Boris Lin



*The results detailed in this test report relate only to the specific sample(s) tested. This report is not to be reproduced except in full, without written approval from NCT Testing Technology.*

|   |                             |
|---|-----------------------------|
| <p><b>TEST REPORT</b><br/> <b>IEC 62133-2</b></p> <p><b>Secondary cells and batteries containing alkaline or other non-acid electrolytes –<br/> Safety requirements for portable sealed secondary cells, and for batteries made<br/> from them, for use in portable applications-</b></p> <p><b>Part 2: Lithium systems</b></p> |                             |
| <b>Report Number</b> .....  | NCT2404106011-1             |
| <b>Date of issue</b> .....  | 2024-10-17                  |
| <b>Total number of pages</b> .....  | 27 pages                    |
| <b>Applicant's name</b> .....   | Same as the applicant       |
| <b>Address</b> .....  | Same as the applicant       |
| <b>Test specification:</b>  |                             |
| <b>Standard</b> .....   | IEC 62133-2:2017+AMD1:2021  |
| <b>Test procedure</b> .....   | Test Report                 |
| <b>Non-standard test method</b> .....   | N/A                         |
| <b>Test item description</b> .....  | Rechargeable Li-ion Battery |
| <b>Trade Mark</b> .....   | N/A                         |
| <b>Manufacturer</b> .....   | Same as applicant           |
| <b>Address</b> .....  | Same as applicant           |
| <b>Model/Type reference</b> .....   | 502030                      |
| <b>Ratings</b> .....  | 3.7V, 200mAh, 0.74Wh        |

|   |   |
|---|---|
| <b>Testing procedure and testing location:</b>  |   |
| <b>Testing Laboratory:</b>  |   |
| Testing location/ address.....: Shenzhen NCT Testing Technology Co., Ltd.<br>B2A101/B2A201/B2A202, Fuqiao 6th Area, Xintian, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China   |   |
| <b>List of Attachments:</b>   |   |
| Appendix 1: 3 pages of Photo Documentation  |   |
| <b>Summary of testing:</b>  |   |
| <p><b>Tests performed (name of test and test clause):</b></p> <ul style="list-style-type: none"> <li>cl.5.6.2 Design recommendation;</li> <li>cl.7.1 Charging procedure for test purposes (for Cells and Batteries);</li> <li>cl.7.2.1 Continuous charging at constant voltage (cells);</li> <li>cl.7.3.1 External short circuit (cells);</li> <li>cl.7.3.2 External short circuit (batteries);</li> <li>cl.7.3.3 Free fall (cells and batteries);</li> <li>cl.7.3.4 Thermal abuse (cells);</li> <li>cl.7.3.5 Crush (cells);</li> <li>cl.7.3.6 Over-charging of battery;</li> <li>cl.7.3.7 Forced discharge (cells);</li> <li>cl.7.3.8 Mechanical tests (batteries);</li> <li>cl.7.3.9 Design evaluation – Forced internal short circuit (cells)</li> <li>cl.8.2 Small cell and battery safety information</li> </ul> <p>Tests are made with the number of cells and batteries specified in IEC 62133-2: 2017 +AMD1:2021 Table 1.</p> | <p><b>Testing location:</b></p> <p>Shenzhen NCT Testing Technology Co., Ltd.<br/>B2A101/B2A201/B2A202, Fuqiao 6th Area, Xintian, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China</p> |
| <b>Summary of compliance with National Differences</b>  |   |
| N/A   |   |
| <input checked="" type="checkbox"/> The product fulfils the requirements of <u>EN 62133-2: 2017+A1:2021</u>   |   |



**Copy of marking plate**

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

**Rechargeable Li-ion Battery****Model: 502030 (1INP5/20/30)****Rated: 3.7V, 200mAh, 0.74Wh****Red wire: +      Black wire: -****YYYYMM**

Manufacturer date: YYMMDD

“YY” means year, “MM” means month, “DD” means day.

**Information for safety mentioned on equipment's package**

Potential for fire or burning. Do not disassemble, puncture, crush, heat or burn.

Use only with specified charger.

Keep small cells and batteries which are considered swallowable out of the reach of children.

Swallowing may lead to burns, perforation of soft tissue, and death. Severe burns can occur within 2h of ingestion.

In case of ingestion of a cell or battery, seek medical assistance promptly.

|  |   |
|--|---|
| <b>Test item particulars .....</b>   |   |
| <b>Classification of installation and use .....</b>  | To be defined in final product  |
| <b>Supply connection .....</b>   | Lead wire   |
| <b>Recommend charging method declared by the manufacturer .....</b>  | Charging the battery with 100mA constant current until 4.2V, then constant voltage until charge current reduces to 4mA at ambient 20°C±5°C. |
| <b>Discharge current (0,2 I<sub>A</sub>) .....</b>   | 40mA  |
| <b>Specified final voltage .....</b>   | 2.75V   |
| <b>Upper limit charging voltage per cell .....</b>   | 4.2V  |
| <b>Maximum charging current .....</b>  | 300mA   |
| <b>Charging temperature upper limit .....</b>  | 45°C  |
| <b>Charging temperature lower limit .....</b>  | 0°C   |
| <b>Polymer cell electrolyte type .....</b>   | <input type="checkbox"/> gel polymer <input type="checkbox"/> solid polymer <input checked="" type="checkbox"/> N/A                         |
| <b>Possible test case verdicts:</b>  |   |
| - test case does not apply to the test object .....  | N/A   |
| - test object does meet the requirement .....  | P (Pass)  |
| - test object does not meet the requirement .....  | F (Fail)  |
| <b>Testing .....</b>   |   |
| <b>Date of receipt of test item .....</b>  | 2024-09-30  |
| <b>Date (s) of performance of tests .....</b>  | 2024-10-02 to 2024-10-16  |
| <b>General remarks:</b>  |   |
| <p>The test results presented in this report relate only to the object tested.<br/>                 This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.<br/>                 "(See Enclosure #)" refers to additional information appended to the report.<br/>                 "(See appended table)" refers to a table appended to the report.<br/> <b>Throughout this report a <input type="checkbox"/> comma / <input checked="" type="checkbox"/> point is used as the decimal separator.</b></p> |   |
| <b>Name and address of factory (ies) .....</b>   | Same as applicant   |

**General product information:**

This battery is constructed with one lithium-ion cell and has overcharge, over-discharge, over current and short-circuits proof circuit.

The main features of the battery pack are shown as below (clause 7.1.1):

| Model (Battery) | Nominal capacity | Nominal voltage | Nominal Charge Current | Nominal Discharge Current | Maximum Charge Current | Maximum Discharge Current | Maximum Charge Voltage | Cut-off Voltage |
|-----------------|------------------|-----------------|------------------------|---------------------------|------------------------|---------------------------|------------------------|-----------------|
| 502030          | 200mAh           | 3.7V            | 100mA                  | 100mA                     | 300mA                  | 300mA                     | 4.20V                  | 2.75V           |


The main features of the cell in the battery pack are shown as below (clause 7.1.1):

| Model (Cell) | Nominal capacity | Nominal voltage | Nominal Charge Current | Nominal Discharge Current | Maximum Charge Current | Maximum Discharge Current | Maximum Charge Voltage | Cut-off Voltage |
|--------------|------------------|-----------------|------------------------|---------------------------|------------------------|---------------------------|------------------------|-----------------|
| 502030       | 200mAh           | 3.7V            | 100mA                  | 100mA                     | 300mA                  | 300mA                     | 4.20V                  | 2.75V           |

The main features of the cell in the battery pack are shown as below (clause 7.1.2):


| Model (Cell) | Upper limit charge voltage | Taper-off current | Lower charge temperature | Upper charge temperature |
|--------------|----------------------------|-------------------|--------------------------|--------------------------|
| 502030       | 4.25V                      | 10mA              | 0°C                      | 45°C                     |

**Construction:**

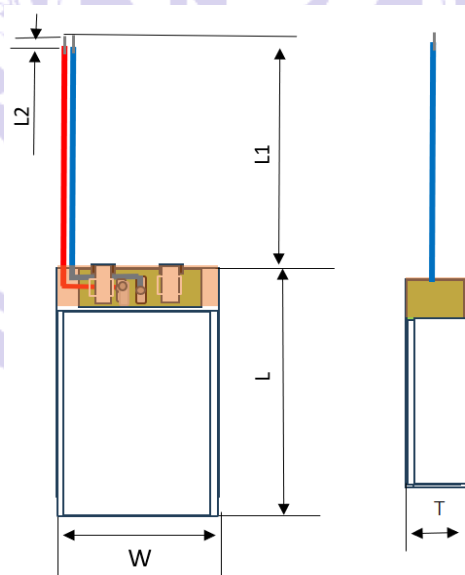

T: max 5.2mm, W: max 20.2mm, L: max 32.5mm  
Battery

Circuit diagram:

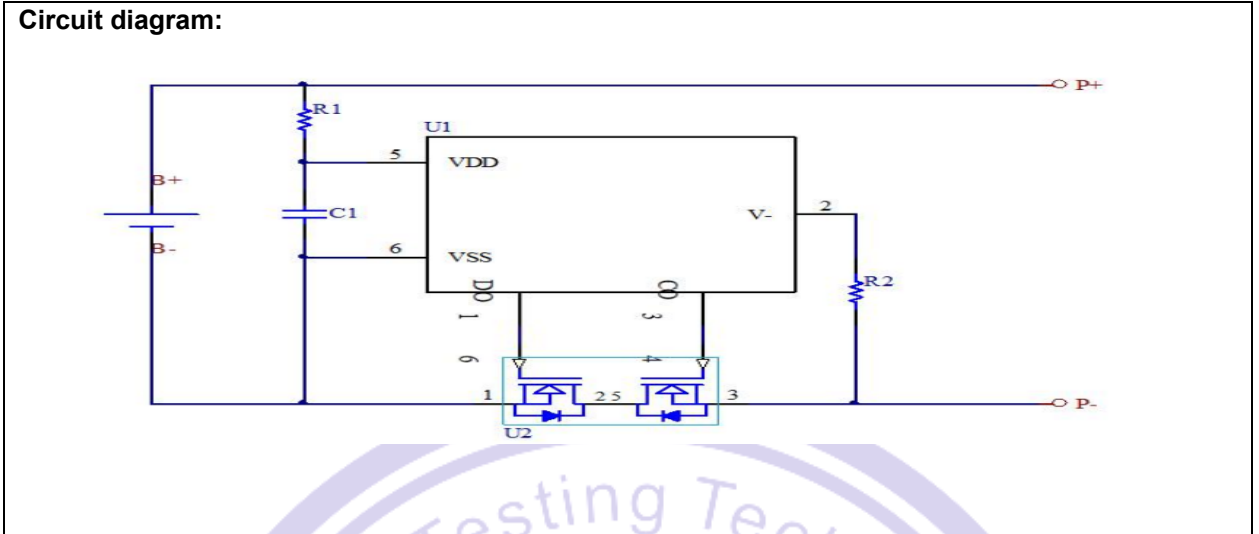

| IEC 62133-2 |  |  |         |
|-------------|--|--|---------|
| Clause      | Requirement + Test   | Result - Remark  | Verdict |
| <b>4</b>    | <b>PARAMETER MEASUREMENT TOLERANCES</b>  |  | P       |
|             | Parameter measurement tolerances   |  | P       |
| <b>5</b>    | <b>GENERAL SAFETY CONSIDERATIONS</b>   |  | P       |
| <b>5.1</b>  | <b>General</b>   |  | P       |
|             | Cells and batteries so designed and constructed that they are safe under conditions of both intended use and reasonably foreseeable misuse   |  | P       |
| <b>5.2</b>  | <b>Insulation and wiring</b>   |  | P       |
|             | The insulation resistance between the positive terminal and externally exposed metal surfaces of the battery (excluding electrical contact surfaces) is not less than 5 MΩ   | No metal surface exists.   | N/A     |
|             | Insulation resistance (MΩ) ..... :   |  | —       |
|             | Internal wiring and insulation are sufficient to withstand maximum anticipated current, voltage and temperature requirements   |  | P       |
|             | Orientation of wiring maintains adequate clearances and creepage distances between conductors  |  | P       |
|             | Mechanical integrity of internal connections accommodates reasonably foreseeable misuse  |  | P       |
| <b>5.3</b>  | <b>Venting</b>   |  | P       |
|             | Battery cases and cells incorporate a pressure relief mechanism or are constructed so that they relieve excessive internal pressure at a value and rate that will preclude rupture, explosion and self-ignition            | Venting mechanism exists on narrow side of the pouch cell.   | P       |
|             | Encapsulation used to support cells within an outer casing does not cause the battery to overheat during normal operation nor inhibit pressure relief  |  | N/A     |
| <b>5.4</b>  | <b>Temperature, voltage and current management</b>   |  | P       |
|             | Batteries are designed such that abnormal temperature rise conditions are prevented  | Overcharge, overdischarge, over current and short-circuit proof circuit used in this battery. See tests of clause 7. | P       |
|             | Batteries are designed to be within temperature, voltage and current limits specified by the cell manufacturer   | See above.   | P       |
|             | Batteries are provided with specifications and charging instructions for equipment manufacturers so that specified chargers are designed to maintain charging within the temperature, voltage and current limits specified | The charging limits specified in the manufacturer's specification.   | P       |

| IEC 62133-2 |  |   |         |
|-------------|--|---|---------|
| Clause      | Requirement + Test   | Result - Remark   | Verdict |
| <b>5.5</b>  | <b>Terminal contacts</b>   |   | P       |
|             | The size and shape of the terminal contacts ensure that they can carry the maximum anticipated current   |   | P       |
|             | External terminal contact surfaces are formed from conductive materials with good mechanical strength and corrosion resistance   |   | P       |
|             | Terminal contacts are arranged to minimize the risk of short circuits  |   | P       |
| <b>5.6</b>  | <b>Assembly of cells into batteries</b>  |   | P       |
| 5.6.1       | General  |   | P       |
|             | Each battery has an independent control and protection for current, voltage, temperature and any other parameter required for safety and to maintain the cells within their operating region   | Protective circuit equipped on battery.                                 | P       |
|             | This protection may be provided external to the battery such as within the charger or the end devices  |   | N/A     |
|             | If protection is external to the battery, the manufacturer of the battery provide this safety relevant information to the external device manufacturer for implementation  |   | N/A     |
|             | If there is more than one battery housed in a single battery case, each battery has protective circuitry that can maintain the cells within their operating regions  |   | N/A     |
|             | Manufacturers of cells specify current, voltage and temperature limits so that the battery manufacturer/designer may ensure proper design and assembly   | Current, voltage and temperature limits specified by cell manufacturer. | P       |
|             | Batteries that are designed for the selective discharge of a portion of their series connected cells incorporate circuitry to prevent operation of cells outside the limits specified by the cell manufacturer                             |   | N/A     |
|             | Protective circuit components are added as appropriate and consideration given to the end-device application   |   | P       |
|             | The manufacturer of the battery provide a safety analysis of the battery safety circuitry with a test report including a fault analysis of the protection circuit under both charging and discharging conditions confirming the compliance | Safety analysis report provided by manufacturer.                        | P       |
| 5.6.2       | Design recommendation  |   | P       |

| IEC 62133-2 |  |   |         |
|-------------|--|---|---------|
| Clause      | Requirement + Test   | Result - Remark   | Verdict |
|             | For the battery consisting of a single cell or a single cellblock, it is recommended that the charging voltage of the cell does not exceed the upper limit of the charging voltage specified in Table 2  | Single cell battery, Max. Charging voltage of cell: 4.2V, not exceed 4.2V specified in Clause 7.1.2, Table 2. | P       |
|             | For the battery consisting of series-connected plural single cells or series-connected plural cellblocks, it is recommended that the voltages of any one of the single cells or single cellblocks does not exceed the upper limit of the charging voltage, specified in Table 2, by monitoring the voltage of every single cell or the single cellblocks |   | N/A     |
|             | For the battery consisting of series-connected plural single cells or series-connected plural cellblocks, it is recommended that charging is stopped when the upper limit of the charging voltage is exceeded for any one of the single cells or single cellblocks by measuring the voltage of every single cell or the single cellblocks                |   | N/A     |
|             | For batteries consisting of series-connected cells or cell blocks, nominal charge voltage are not counted as an overcharge protection  |   | N/A     |
|             | For batteries consisting of series-connected cells or cell blocks, cells have closely matched capacities, be of the same design, be of the same chemistry and be from the same manufacturer  |   | N/A     |
|             | It is recommended that the cells and cell blocks are not discharged beyond the cell manufacturer's specified final voltage   | Final voltage of cell: 2.75V, not exceed the final voltage specified by cell manufacturer.                    | P       |
|             | For batteries consisting of series-connected cells or cell blocks, cell balancing circuitry are incorporated into the battery management system  |   | N/A     |
| 5.6.3       | Mechanical protection for cells and components of batteries  |   | P       |
|             | Mechanical protection for cells, cell connections and control circuits within the battery are provided to prevent damage as a result of intended use and reasonably foreseeable misuse   | Mechanical protection for cell connections and control circuits provided.                                     | P       |
|             | The mechanical protection can be provided by the battery case or it can be provided by the end product enclosure for those batteries intended for building into an end product   | Build-in batteries, mechanical protection for battery should be provided by end product.                      | N/A     |
|             | The battery case and compartments housing cells are designed to accommodate cell dimensional tolerances during charging and discharging as recommended by the cell manufacturer  | To be evaluated in final system.  | N/A     |

| IEC 62133-2 |   |  |         |
|-------------|---|--|---------|
| Clause      | Requirement + Test  | Result - Remark                            | Verdict |
|             | For batteries intended for building into a portable end product, testing with the battery installed within the end product is considered when conducting mechanical tests   |  | N/A     |
| <b>5.7</b>  | <b>Quality plan</b>   |  | P       |
|             | The manufacturer prepares and implements a quality plan that defines procedures for the inspection of materials, components, cells and batteries and which covers the whole process of producing each type of cell or battery | Complied.<br>Quality plan certificate      | P       |
| <b>5.8</b>  | <b>Battery safety components</b>  | See TABLE: Critical components information | N/A     |
| <b>6</b>    | <b>TYPE TEST AND SAMPLE SIZE</b>  |  | P       |
|             | Tests are made with the number of cells or batteries specified in Table 1 using cells or batteries that are not more than six months old  |  | P       |
|             | The internal resistance of coin cells are measured in accordance with Annex D. Coin cells with internal resistance less than or equal to 3 Ω are tested in accordance with Table 1  | Not coin cells                             | N/A     |
|             | Unless otherwise specified, tests are carried out in an ambient temperature of 20 °C ± 5 °C   |  | P       |
|             | The safety analysis of 5.6.1 identify those components of the protection circuit that are critical for short-circuit, overcharge and over discharge protection  |  | P       |
|             | When conducting the short-circuit test, consideration is given to the simulation of any single fault condition that is likely to occur in the protecting circuit that would affect the short-circuit test                     | See clause 7.3.2.                          | P       |
| <b>7</b>    | <b>SPECIFIC REQUIREMENTS AND TESTS</b>  |  | P       |
| <b>7.1</b>  | <b>Charging procedure for test purposes</b>   |  | P       |
| 7.1.1       | First procedure   |  | P       |
|             | This charging procedure applies to subclauses other than those specified in 7.1.2   |  | P       |
|             | Unless otherwise stated in this document, the charging procedure for test purposes is carried out in an ambient temperature of 20 °C ± 5 °C, using the method declared by the manufacturer                                    | See page 4.                                | P       |
|             | Prior to charging, the battery has been discharged at 20 °C ± 5 °C at a constant current of 0,2 It A down to a specified final voltage  | See page 4.                                | P       |



| IEC 62133-2 |  |   |         |
|-------------|--|---|---------|
| Clause      | Requirement + Test   | Result - Remark   | Verdict |
| 7.1.2       | Second procedure   |   | P       |
|             | This charging procedure applies only to 7.3.1, 7.3.4, 7.3.5, and 7.3.9   |   | P       |
|             | After stabilization for 1 h to 4 h, at an ambient temperature of the highest test temperature and the lowest test temperature, respectively, as specified in Table 2, cells are charged by using the upper limit charging voltage and maximum charging current, until the charging current is reduced to 0,05 It A, using a constant current to constant voltage charging method | Charge temperature range: 0-45°C declared. 0°C used for lower limit tests. 45°C used for upper limit tests. | P       |
| <b>7.2</b>  | <b>Intended use</b>  |   | P       |
| 7.2.1       | Continuous charging at constant voltage (cells)  |   | P       |
|             | Fully charged cells are subjected for 7 days to a charge using the charging method for current and standard voltage specified by the cell manufacturer   | Charging for 7 days with 100mA.   | P       |
|             | Results: no fire, no explosion, no leakage..... :  | (See appended table 7.2.1)  | P       |
| 7.2.2       | Case stress at high ambient temperature (battery)  |   | N/A     |
|             | Oven temperature (°C)..... :   | 70.4  | —       |
|             | Results: no physical distortion of the battery case resulting in exposure of internal protective components and cells  |   | N/A     |
| <b>7.3</b>  | <b>Reasonably foreseeable misuse</b>   |   | P       |
| 7.3.1       | External short-circuit (cell)  | Tested complied.  | P       |
|             | The cells were tested until one of the following occurred:   |   | P       |
|             | - 24 hours elapsed; or   |   | N/A     |
|             | - The case temperature declined by 20 % of the maximum temperature rise  |   | P       |
|             | Results: no fire, no explosion..... :  | (See appended table 7.3.1)  | P       |
| 7.3.2       | External short-circuit (battery)   | Tested complied.  | P       |
|             | The batteries were tested until one of the following occurred:   |   | P       |
|             | - 24 hours elapsed; or   |   | N/A     |
|             | - The case temperature declined by 20 % of the maximum temperature rise  |   | P       |
|             | In case of rapid decline in short circuit current, the battery pack remained on test for an additional one hour after the current reached a low end steady state condition   |   | P       |

| IEC 62133-2 |  |  |         |
|-------------|--|--|---------|
| Clause      | Requirement + Test   | Result - Remark                          | Verdict |
|             | A single fault in the discharge protection circuit is conducted on one to four (depending upon the protection circuit) of the five samples before conducting the short-circuit test            | Single fault conducted on three samples. | P       |
|             | A single fault applies to protective component parts such as MOSFET (metal oxide semiconductor field-effect transistor), fuse, thermostat or positive temperature coefficient (PTC) thermistor | Single fault applies on MOSFET (U2).     | P       |
|             | Results: no fire, no explosion..... :  | (See appended table 7.3.2)               | P       |
| 7.3.3       | Free fall  | Tested complied.                         | P       |
|             | Results: no fire, no explosion   | No fire. No explosion                    | P       |
| 7.3.4       | Thermal abuse (cells)  | Tested complied.                         | P       |
|             | Oven temperature (°C)..... :   | 130°C                                    | —       |
|             | Results: no fire, no explosion   | No fire. No explosion                    | P       |
| 7.3.5       | Crush (cells)  | Tested complied.                         | P       |
|             | The crushing force was released upon:  |  | P       |
|             | - The maximum force of 13 kN ± 0,78 kN has been applied; or  |  | P       |
|             | - An abrupt voltage drop of one-third of the original voltage has been obtained  |  | N/A     |
|             | Results: no fire, no explosion..... :  | (See appended table 7.3.5)               | P       |
| 7.3.6       | Over-charging of battery   | Tested complied.                         | P       |
|             | The supply voltage which is:   |  | P       |
|             | - 1,4 times the upper limit charging voltage presented in Table A.1 (but not to exceed 6,0 V) for single cell/cell block batteries or  | 5.95V applied.                           | P       |
|             | - 1,2 times the upper limit charging voltage resented in Table A.1 per cell for series connected multi-cell batteries, and   |  | N/A     |
|             | - Sufficient to maintain a current of 2,0 It A throughout the duration of the test or until the supply voltage is reached  |  | P       |
|             | Test was continued until the temperature of the outer casing:  |  | P       |
|             | - Reached steady state conditions (less than 10 °C change in 30-minute period); or   |  | P       |
|             | - Returned to ambient  |  | N/A     |
|             | Results: no fire, no explosion..... :  | (See appended table 7.3.6)               | P       |
| 7.3.7       | Forced discharge (cells)   | Tested complied.                         | P       |

| IEC 62133-2 |   |   |         |
|-------------|---|---|---------|
| Clause      | Requirement + Test  | Result - Remark                               | Verdict |
|             | Discharge a single cell to the lower limit discharge voltage specified by the cell manufacturer   |   | P       |
|             | The discharged cell is then subjected to a forced discharge at 1 It A to the negative value of the upper limit charging voltage   |   | P       |
|             | - The discharge voltage reaches the negative value of upper limit charging voltage within the testing duration. The voltage is maintained at the negative value of the upper limit charging voltage by reducing the current for the remainder of the testing duration |   | N/A     |
|             | - The discharge voltage does not reach the negative value of upper limit charging voltage within the testing duration. The test is terminated at the end of the testing duration  |   | P       |
|             | Results: no fire, no explosion..... :   | (See appended table 7.3.7)                    | P       |
| 7.3.8       | Mechanical tests (batteries)  |   | P       |
| 7.3.8.1     | Vibration   | Tested complied.                              | P       |
|             | Results: no fire, no explosion, no rupture, no leakage or venting..... :  | (See appended table 7.3.8.1)                  | P       |
| 7.3.8.2     | Mechanical shock  | Tested complied.                              | P       |
|             | Results: no leakage, no venting, no rupture, no explosion and no fire..... :  | (See appended table 7.3.8.2)                  | P       |
| 7.3.9       | Design evaluation – Forced internal short-circuit (cells)   | Tested complied.                              | P       |
|             | The cells complied with national requirement for..... :   | France, Japan, Republic of Korea, Switzerland | —       |
|             | The pressing was stopped upon:  |   | P       |
|             | - A voltage drop of 50 mV has been detected; or   |   | N/A     |
|             | - The pressing force of 800 N (cylindrical cells) or 400 N (prismatic cells) has been reached   | 400N for prismatic cells.                     | P       |
|             | Results: no fire..... :   | (See appended table 7.3.9)                    | P       |

| IEC 62133-2 |   |  |         |
|-------------|---|--|---------|
| Clause      | Requirement + Test  | Result - Remark  | Verdict |
| <b>8</b>    | <b>INFORMATION FOR SAFETY</b>   |  | P       |
| <b>8.1</b>  | <b>General</b>  |  | P       |
|             | Manufacturers of secondary cells provides information about current, voltage and temperature limits of their products   | Information for safety mentioned in manufacturer's specifications. | P       |
|             | Manufacturers of batteries provides information regarding how to minimize and mitigate hazards to equipment manufacturers or end-users                              | Information for safety mentioned in manufacturer's specifications. | P       |
|             | Systems analyses are performed by device manufacturers to ensure that a particular battery design prevents hazards from occurring during use of a product           |  | N/A     |
|             | As appropriate, any information relating to hazard avoidance resulting from a system analysis is provided to the end user   |  | N/A     |
|             | Do not allow children to replace batteries without adult supervision  |  | P       |
| <b>8.2</b>  | <b>Small cell and battery safety information</b>  | Small cells and batteries.   | P       |
|             | The following warning language is to be provided with the information packaged with the small cells and batteries or equipment using them:                          | Information for safety mentioned on equipment's package.           | P       |
|             | - Keep small cells and batteries which are considered swallowable out of the reach of children  |  | P       |
|             | - Swallowing may lead to burns, perforation of soft tissue, and death. Severe burns can occur within 2 h of ingestion   |  | P       |
|             | - In case of ingestion of a cell or battery, seek medical assistance promptly   |  | P       |
| <b>9</b>    | <b>MARKING</b>  |  | P       |
| <b>9.1</b>  | <b>Cell marking</b>   |  | N/A     |
|             | Cells are marked as specified in IEC 61960, except coin cells   | The final product is battery.                                      | N/A     |
|             | Coin cells whose external surface area is too small to accommodate the markings on the cells show the designation and polarity                                      |  | N/A     |
|             | By agreement between the cell manufacturer and the battery and/or end product manufacturer, component cells used in the manufacture of a battery need not be marked |  | N/A     |
| <b>9.2</b>  | <b>Battery marking</b>  |  | P       |

| IEC 62133-2    |  |   |         |
|----------------|--|---|---------|
| Clause         | Requirement + Test   | Result - Remark   | Verdict |
|                | Batteries are marked as specified in IEC 61960, except for coin batteries  | The battery is marked in accordance with IEC 61960, also see copy of marking plate.           | P       |
|                | Coin batteries whose external surface area is too small to accommodate the markings on the batteries show the designation and polarity               | Not coin battery.   | N/A     |
|                | Batteries are marked with an appropriate caution statement   |   | P       |
|                | - Terminals have clear polarity marking on the external surface of the battery, or   | The "Red wire: +" and "Black wire: -" polarity explicitly marked on surface of the battery.   | P       |
|                | - Not be marked with polarity markings if the design of the external connector prevents reverse polarity connections                                 |   | N/A     |
| <b>9.3</b>     | <b>Caution for ingestion of small cells and batteries</b>  |   | N/A     |
|                | Coin cells and batteries identified as small batteries include a caution statement regarding the hazards of ingestion in accordance with 8.2         | Not coin cells  | N/A     |
|                | Small cells and batteries are intended for direct sale in consumer-replaceable applications, caution for ingestion is given on the immediate package | Not intended for direct sale.   | N/A     |
| <b>9.4</b>     | <b>Other information</b>   |   | P       |
|                | The following information are marked on or supplied with the battery:  |   | P       |
|                | - Storage and disposal instructions  | Information for storage and disposal instructions mentioned in manufacturer's specifications. | P       |
|                | - Recommended charging instructions  | Information for recommended charging instructions mentioned in manufacturer's specifications. | P       |
| <b>10</b>      | <b>PACKAGING AND TRANSPORT</b>   |   | N/A     |
|                | Packaging for coin cells are not be small enough to fit within the limits of the ingestion gauge of Figure 3   | Not coin cells.   | N/A     |
| <b>ANNEX A</b> | <b>CHARGING AND DISCHARGING RANGE OF SECONDARY LITHIUM ION CELLS FOR SAFE USE</b>  |   | P       |
| <b>A.1</b>     | <b>General</b>   |   | P       |
| <b>A.2</b>     | <b>Safety of lithium ion secondary battery</b>   | Complied.   | P       |

| IEC 62133-2 |   |  |         |
|-------------|---|--|---------|
| Clause      | Requirement + Test  | Result - Remark  | Verdict |
| <b>A.3</b>  | <b>Consideration on charging voltage</b>  | Complied.  | P       |
| A.3.1       | General   |  | P       |
| A.3.2       | Upper limit charging voltage  | 4.25V applied.   | P       |
| A.3.2.1     | General   |  | P       |
| A.3.2.2     | Explanation of safety viewpoint   |  | P       |
| A.3.2.3     | Safety requirements, when different upper limit charging voltage is applied             | 4.25V applied.   | P       |
| <b>A.4</b>  | <b>Consideration of temperature and charging current</b>                                |  | P       |
| A.4.1       | General   |  | P       |
| A.4.2       | Recommended temperature range   | Charging temperature range declared by client is: 0-45°C                             | P       |
| A.4.2.1     | General   |  | P       |
| A.4.2.2     | Safety consideration when a different recommended temperature range is applied          |  | N/A     |
| A.4.3       | High temperature range  |  | N/A     |
| A.4.3.1     | General   |  | N/A     |
| A.4.3.2     | Explanation of safety viewpoint   |  | N/A     |
| A.4.3.3     | Safety considerations when specifying charging conditions in the high temperature range |  | N/A     |
| A.4.3.4     | Safety considerations when specifying a new upper limit in the high temperature range   |  | N/A     |
| A.4.4       | Low temperature range   |  | N/A     |
| A.4.4.1     | General   |  | N/A     |
| A.4.4.2     | Explanation of safety viewpoint   |  | N/A     |
| A.4.4.3     | Safety considerations, when specifying charging conditions in the low temperature range |  | N/A     |
| A.4.4.4     | Safety considerations when specifying a new lower limit in the low temperature range    |  | N/A     |
| A.4.5       | Scope of the application of charging current  |  | P       |
| A.4.6       | Consideration of discharge  |  | P       |
| A.4.6.1     | General   |  | P       |
| A.4.6.2     | Final discharge voltage and explanation of safety viewpoint                             | Cell specified final voltage 2.75V, not exceed 2.75V specified by cell manufacturer. | P       |
| A.4.6.3     | Discharge current and temperature range   |  | P       |
| A.4.6.4     | Scope of application of the discharging current   |  | P       |

| IEC 62133-2    |   |                 |         |
|----------------|---|-----------------|---------|
| Clause         | Requirement + Test  | Result - Remark | Verdict |
| <b>A.5</b>     | <b>Sample preparation</b>   |                 | P       |
| A.5.1          | General   |                 | P       |
| A.5.2          | Insertion procedure for nickel particle to generate internal short                            |                 | P       |
| A.5.3          | Disassembly of charged cell   |                 | P       |
| A.5.4          | Shape of nickel particle  |                 | P       |
| A.5.5          | Insertion of nickel particle in cylindrical cell  |                 | N/A     |
| A.5.5.1        | Insertion of nickel particle in winding core  |                 | N/A     |
| A.5.5.2        | Marking the position of the nickel particle on both ends of the winding core of the separator |                 | N/A     |
| A.5.6          | Insertion of nickel particle in prismatic cell  |                 | P       |
| <b>A.6</b>     | <b>Experimental procedure of the forced internal short-circuit test</b>                       |                 | P       |
| A.6.1          | Material and tools for preparation of nickel particle   |                 | P       |
| A.6.2          | Example of a nickel particle preparation procedure  |                 | P       |
| A.6.3          | Positioning (or placement) of a nickel particle   |                 | P       |
| A.6.4          | Damaged separator precaution  |                 | P       |
| A.6.5          | Caution for rewinding separator and electrode   |                 | P       |
| A.6.6          | Insulation film for preventing short-circuit  |                 | P       |
| A.6.7          | Caution when disassembling a cell   |                 | P       |
| A.6.8          | Protective equipment for safety   |                 | P       |
| A.6.9          | Caution in the case of fire during disassembling  |                 | P       |
| A.6.10         | Caution for the disassembling process and pressing the electrode core                         |                 | P       |
| A.6.11         | Recommended specifications for the pressing device  |                 | P       |
| <b>ANNEX B</b> | <b>RECOMMENDATIONS TO EQUIPMENT MANUFACTURERS AND BATTERY ASSEMBLERS</b>                      |                 | N/A     |
| <b>ANNEX C</b> | <b>RECOMMENDATIONS TO THE END-USERS</b>   |                 | N/A     |
| <b>ANNEX D</b> | <b>MEASUREMENT OF THE INTERNAL AC RESISTANCE FOR COIN CELLS</b>                               |                 | N/A     |
| <b>D.1</b>     | <b>General</b>  | Not coin cells. | N/A     |
| <b>D.2</b>     | <b>Method</b>   |                 | N/A     |
|                | A sample size of three coin cells is required for this measurement                            |                 | N/A     |

| IEC 62133-2    |  |                          |         |
|----------------|--|--------------------------|---------|
| Clause         | Requirement + Test   | Result - Remark          | Verdict |
|                | Coin cells with an internal resistance greater than 3 $\Omega$ require no further testing .....  | (See appended table D.2) | N/A     |
|                | Coin cells with an internal resistance less than or equal to 3 $\Omega$ are subjected to the testing according to Clause 6 and Table 1 |                          | N/A     |
| <b>ANNEX E</b> | <b>PACKAGING AND TRANSPORT</b>   |                          | N/A     |
| <b>ANNEX F</b> | <b>COMPONENT STANDARDS REFERENCES</b>  |                          | N/A     |





| 5.1 – 5.6                              |   |                     |  |   |                          |
|--|---|---------------------|--|---|--------------------------|
| TABLE: Critical components information |   |                     |  |   |                          |
| Object/part no.                        | Manufacturer/<br>trademark                                      | Type/model          | Technical data   | Standard  | Mark(s) of<br>conformity |
| -Lead wire                             | DONGGUAN<br>WENCHANG<br>ELECTRONIC<br>PRODUCTS<br>CO.,LTD       | 3302                | 30AWG, 105°C,<br>30Vac   | UL 758  | UL<br>E214500            |
| -Lead wire<br>(Alternative)            | Interchangeable   | Interchange<br>able | 30AWG, 105°C,<br>30Vac   | UL 758  | UL<br>approved           |
| PCB                                    | Shenzhen Assunny<br>Precision Circuit<br>Scien-Tech Co.,<br>LTD | RD                  | V-0, 130 °C  | UL 796  | UL E248037               |
| PCB<br>(Alternative)                   | Interchangeable   | Interchange<br>able | V-0, 130°C   | UL 796  | UL<br>approved           |
| Protective IC<br>(U1)                  | Shenzhen<br>Developer<br>Microelectronics<br>CO., LTD           | DW01                | Over-charge detection<br>Voltage: 4.28±0.05V,<br>Over-discharge<br>detection Voltage:<br>2.40±0.1V | --  | Tested with<br>appliance |
| MOSFET<br>(U2)                         | Shenzhen<br>Developer<br>Microelectronics<br>CO., LTD           | 8205A               | V <sub>DS</sub> =20V, V <sub>GS</sub> =±12V,<br>I <sub>b</sub> = 5A                                | --  | Tested with<br>appliance |
| Cell                                   |   | 502030              | 3.7V, 200mAh   | IEC 62133-2:<br>2017, IEC<br>62133-2:<br>2017/AMD1:<br>2021 | Tested with<br>appliance |
| -Positive<br>electrode                 | Ningxia Sinochem<br>Lithium battery<br>Material Co., LTD        | Z10C                | LiNi <sub>0.5</sub> Co <sub>0.2</sub> Mn <sub>0.3</sub> O <sub>2</sub>                             | --  | --                       |
| -Negative<br>electrode                 | Ganzhou Ruifute<br>Technology Co.,<br>LTD                       | AGF-7               | Graphite   | --  | --                       |
| -Separator                             | Huizhou Yusheng<br>Technology Co.,<br>LTD                       | PE14                | PE, Shutdown<br>temperature: 130°C,<br>Thickness: 14µm   | --  | --                       |
| -Electrolyte                           | Xiamen First energy<br>technology Co., LTD                      | SN3225M1            | LiPF <sub>6</sub> +EC+EMC+DM<br>C, H <sub>2</sub> O<20ppm,<br>HF<50ppm                             | --  | --                       |
| Supplementary information: N/A         |   |                     |  |   |                          |

| 7.2.1      | TABLE: Continuous charging at constant voltage (cells) |   |                      |         | P |
|------------|--|---|----------------------|---------|---|
| Sample no. | Recommended charging voltage Vc (Vdc)                  | Recommended charging current I <sub>rec</sub> (A) | OCV before test(Vdc) | Results |   |
| Cell #1    | 4.20   | 0.10  | 4.19                 | P       |   |
| Cell #2    | 4.20   | 0.10  | 4.18                 | P       |   |
| Cell #3    | 4.20   | 0.10  | 4.18                 | P       |   |
| Cell #4    | 4.20   | 0.10  | 4.18                 | P       |   |
| Cell #5    | 4.20   | 0.10  | 4.19                 | P       |   |

**Supplementary information:**  
 - No fire or explosion  
 - No leakage

| 7.3.1   | TABLE: External short-circuit (cell) |                       |                            |                                       |         | P |
|---|--------------------------------------|-----------------------|----------------------------|---------------------------------------|---------|---|
| Sample no.  | Ambient T (°C)                       | OCV before test (Vdc) | Resistance of circuit (mΩ) | Maximum case temperature rise ΔT (°C) | Results |   |
| <b>Samples charged at charging temperature upper limit (45°C)</b> |                                      |                       |                            |                                       |         |   |
| Cell #1   | 55.6                                 | 4.21                  | 91.2                       | 112.6                                 | P       |   |
| Cell #2   | 55.6                                 | 4.21                  | 90.9                       | 113.8                                 | P       |   |
| Cell #3   | 55.6                                 | 4.20                  | 89.6                       | 115.1                                 | P       |   |
| Cell #4   | 55.6                                 | 4.21                  | 92.0                       | 110.7                                 | P       |   |
| Cell #5   | 55.6                                 | 4.20                  | 88.8                       | 114.5                                 | P       |   |
| <b>Samples charged at charging temperature lower limit (0°C)</b>  |                                      |                       |                            |                                       |         |   |
| Cell #6   | 55.5                                 | 4.16                  | 87.9                       | 116.9                                 | P       |   |
| Cell #7   | 55.5                                 | 4.16                  | 91.2                       | 118.0                                 | P       |   |
| Cell #8   | 55.5                                 | 4.17                  | 90.7                       | 119.1                                 | P       |   |
| Cell #9   | 55.5                                 | 4.16                  | 88.8                       | 117.8                                 | P       |   |
| Cell #10  | 55.5                                 | 4.17                  | 89.6                       | 121.4                                 | P       |   |

**Supplementary information:**  
 - No fire or explosion

| 7.3.2                             |                | TABLE: External short-circuit (battery) |                            |   |                                  |         | P |
|-----------------------------------|----------------|---|----------------------------|---|----------------------------------|---------|---|
| Sample no.                        | Ambient T (°C) | OCV before test (Vdc)                   | Resistance of circuit (mΩ) | Maximum case temperature rise $\Delta T$ (°C) | Component single fault condition | Results |   |
| Battery #1                        | 23.6           | 4.19                                    | 91.2                       | 119.2   | Short Circuit MOSFET (U2)        | P       |   |
| Battery #2                        | 23.6           | 4.18                                    | 90.8                       | 115.3   | Short Circuit MOSFET (U2)        | P       |   |
| Battery #3                        | 23.6           | 4.19                                    | 87.9                       | 117.6   | Short Circuit MOSFET (U2)        | P       |   |
| Battery #4                        | 23.6           | 4.19                                    | 88.6                       | 23.7  | /                                | P       |   |
| Battery #5                        | 23.6           | 4.18                                    | 92.3                       | 23.9  | /                                | P       |   |
| <b>Supplementary information:</b> |                |   |                            |   |                                  |         |   |
| - No fire or explosion            |                |   |                            |   |                                  |         |   |

| 7.3.5   |                       | TABLE: Crush (cells)                   |   |         | P |
|---|-----------------------|--|---|---------|---|
| Sample no.  | OCV before test (Vdc) | OCV at removal of crushing force (Vdc) | Maximum force applied to the cell during crush (kN) | Results |   |
| <b>Samples charged at charging temperature upper limit (45°C)</b> |                       |  |   |         |   |
| Cell #1   | 4.21                  | 4.20                                   | 13.02   | P       |   |
| Cell #2   | 4.20                  | 4.20                                   | 12.98   | P       |   |
| Cell #3   | 4.20                  | 4.20                                   | 13.00   | P       |   |
| Cell #4   | 4.21                  | 4.20                                   | 13.01   | P       |   |
| Cell #5   | 4.20                  | 4.20                                   | 12.99   | P       |   |
| <b>Samples charged at charging temperature lower limit (10°C)</b> |                       |  |   |         |   |
| Cell #6   | 4.16                  | 4.16                                   | 13.02   | P       |   |
| Cell #7   | 4.16                  | 4.16                                   | 12.99   | P       |   |
| Cell #8   | 4.17                  | 4.16                                   | 13.01   | P       |   |
| Cell #9   | 4.17                  | 4.17                                   | 13.00   | P       |   |
| Cell #10  | 4.17                  | 4.16                                   | 12.97   | P       |   |
| <b>Supplementary information:</b>                                 |                       |  |   |         |   |
| - No fire or explosion  |                       |  |   |         |   |

| <b>7.3.6</b>  | <b>TABLE: Over-charging of battery</b> |                              |                                     |         | <b>P</b> |
|---|--|------------------------------|-------------------------------------|---------|----------|
| Constant charging current (A) .....                         |  | 0.40                         |                                     | —       |          |
| Supply voltage (Vdc) .....                                  |  | 5.95                         |                                     | —       |          |
| Sample no.  | OCV before charging (Vdc)              | Total charging time (minute) | Maximum outer case temperature (°C) | Results |          |
| Battery #1  | 3.04                                   | 73.0                         | 23.6                                | P       |          |
| Battery #2  | 3.03                                   | 73.0                         | 25.9                                | P       |          |
| Battery #3  | 3.04                                   | 73.0                         | 26.1                                | P       |          |
| Battery #4  | 3.03                                   | 73.0                         | 28.3                                | P       |          |
| Battery #5  | 3.04                                   | 73.0                         | 29.4                                | P       |          |
| <b>Supplementary information:</b><br>- No fire or explosion |  |                              |                                     |         |          |

| <b>7.3.7</b>  | <b>TABLE: Forced discharge (cells)</b>         |                                   |                                     |         | <b>P</b> |
|---|--|-----------------------------------|-------------------------------------|---------|----------|
| Sample no.  | OCV before application of reverse charge (Vdc) | Measured reverse charge $I_r$ (A) | Lower limit discharge voltage (Vdc) | Results |          |
| Cell #1   | 3.03   | 0.20                              | 2.75                                | P       |          |
| Cell #2   | 3.04   | 0.20                              | 2.75                                | P       |          |
| Cell #3   | 3.03   | 0.20                              | 2.75                                | P       |          |
| Cell #4   | 3.03   | 0.20                              | 2.75                                | P       |          |
| Cell #5   | 3.04   | 0.20                              | 2.75                                | P       |          |
| <b>Supplementary information:</b><br>- No fire or explosion |  |                                   |                                     |         |          |

| <b>7.3.8.1</b>  | <b>TABLE: Vibration</b> |                      |                      |                    |         | <b>P</b> |
|---|-------------------------|----------------------|----------------------|--------------------|---------|----------|
| Sample no.  | OCV before test (Vdc)   | OCV after test (Vdc) | Mass before test (g) | Mass after test(g) | Results |          |
| Battery #1  | 4.18                    | 4.18                 | 5.415                | 5.415              | P       |          |
| Battery #2  | 4.19                    | 4.18                 | 5.404                | 5.404              | P       |          |
| Battery #3  | 4.19                    | 4.19                 | 5.349                | 5.349              | P       |          |
| <b>Supplementary information:</b><br>- No fire or explosion<br>- No rupture<br>- No leakage<br>- No venting |                         |                      |                      |                    |         |          |

| 7.3.8.2    |                       | TABLE: Mechanical shock |                      |                    |         | P |
|------------|-----------------------|-------------------------|----------------------|--------------------|---------|---|
| Sample no. | OCV before test (Vdc) | OCV after test (Vdc)    | Mass before test (g) | Mass after test(g) | Results |   |
| Battery #1 | 4.19                  | 4.18                    | 5.211                | 5.211              | P       |   |
| Battery #2 | 4.19                  | 4.19                    | 5.358                | 5.358              | P       |   |
| Battery #3 | 4.18                  | 4.18                    | 5.504                | 5.504              | P       |   |

**Supplementary information:**  
 - No fire or explosion  
 - No rupture  
 - No leakage  
 - No venting

| 7.3.9   |                        | TABLE: Forced internal short circuit (cells) |                                 |                              |         | P |
|---|------------------------|--|---------------------------------|------------------------------|---------|---|
| Sample no.  | Chamber ambient T (°C) | OCV before test (Vdc)                        | Particle location <sup>1)</sup> | Maximum applied pressure (N) | Results |   |
| <b>Samples charged at charging temperature upper limit (45°C)</b> |                        |  |                                 |                              |         |   |
| Cell #1   | 45                     | 4.21   | 1                               | 400                          | P       |   |
| Cell #2   | 45                     | 4.20   | 1                               | 400                          | P       |   |
| Cell #3   | 45                     | 4.20   | 1                               | 400                          | P       |   |
| Cell #4   | 45                     | 4.21   | 1                               | 400                          | P       |   |
| Cell #5   | 45                     | 4.21   | 1                               | 400                          | P       |   |
| <b>Samples charged at charging temperature lower limit (0°C)</b>  |                        |  |                                 |                              |         |   |
| Cell #6   | 0                      | 4.16   | 1                               | 400                          | P       |   |
| Cell #7   | 0                      | 4.17   | 1                               | 400                          | P       |   |
| Cell #8   | 0                      | 4.16   | 1                               | 400                          | P       |   |
| Cell #9   | 0                      | 4.17   | 1                               | 400                          | P       |   |
| Cell #10  | 0                      | 4.16   | 1                               | 400                          | P       |   |



**Supplementary information:**  
<sup>1)</sup>Identify one of the following:  
 1: Nickel particle inserted between positive and negative (active material) coated area.  
 2: Nickel particle inserted between positive aluminium foil and negative active material coated area.  
 - No fire or explosion


| D.2        | TABLE: Internal AC resistance for coin cells |                |                    | N/A                   |
|------------|--|----------------|--------------------|-----------------------|
| Sample no. | Ambient T (°C)                               | Store time (h) | Resistance Rac (Ω) | Results <sup>1)</sup> |
|            |  |                |                    |                       |
|            |  |                |                    |                       |
|            |  |                |                    |                       |


**Supplementary information:**  
<sup>1)</sup> Coin cells with internal resistance less than or equal to 3 Ω, see test result on corresponding tables




Appendix 1  
Photo Documentation

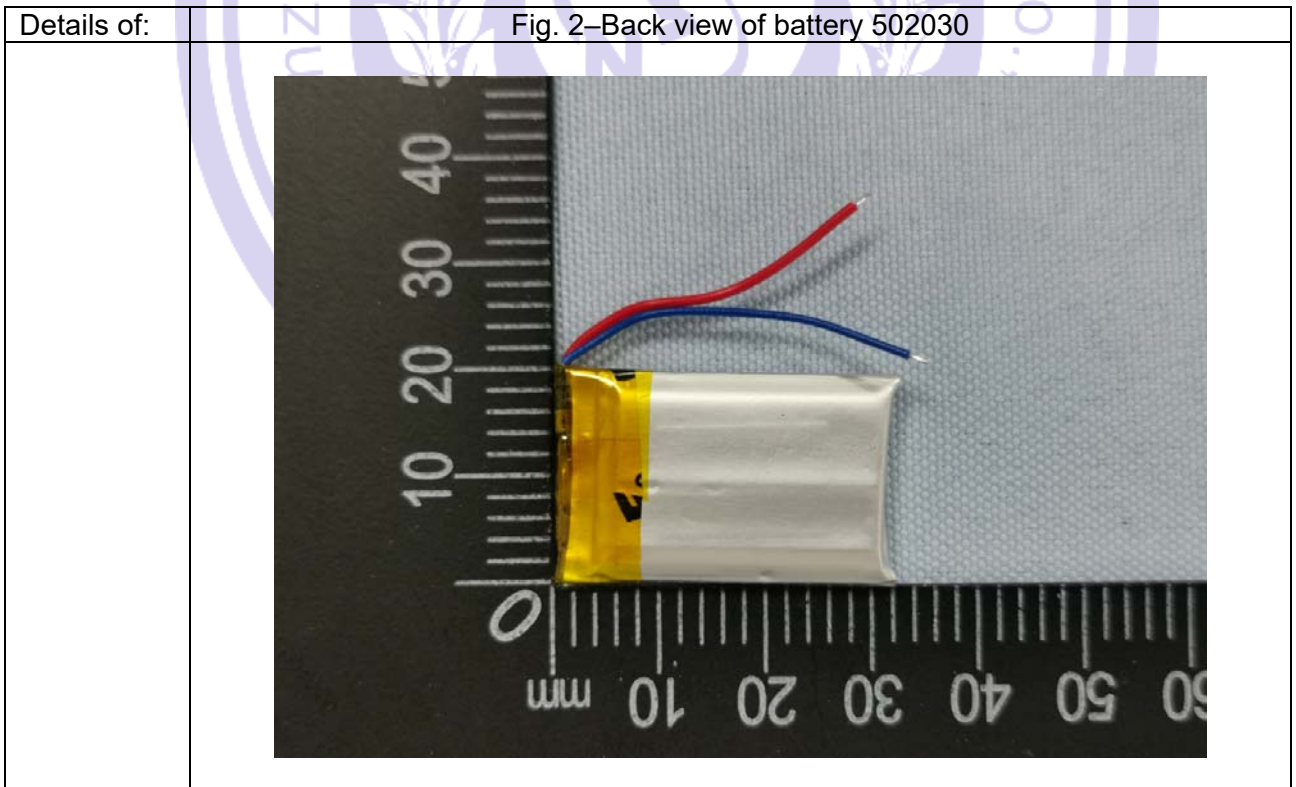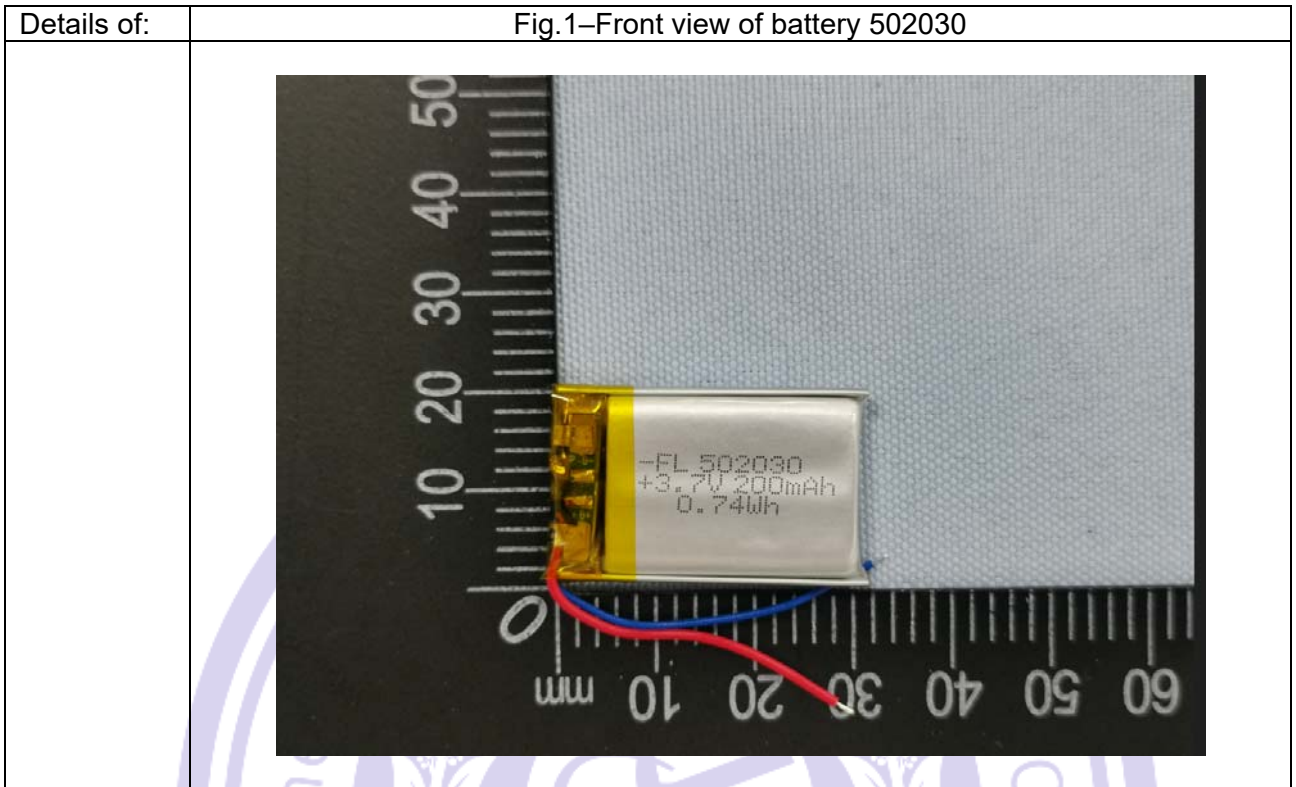

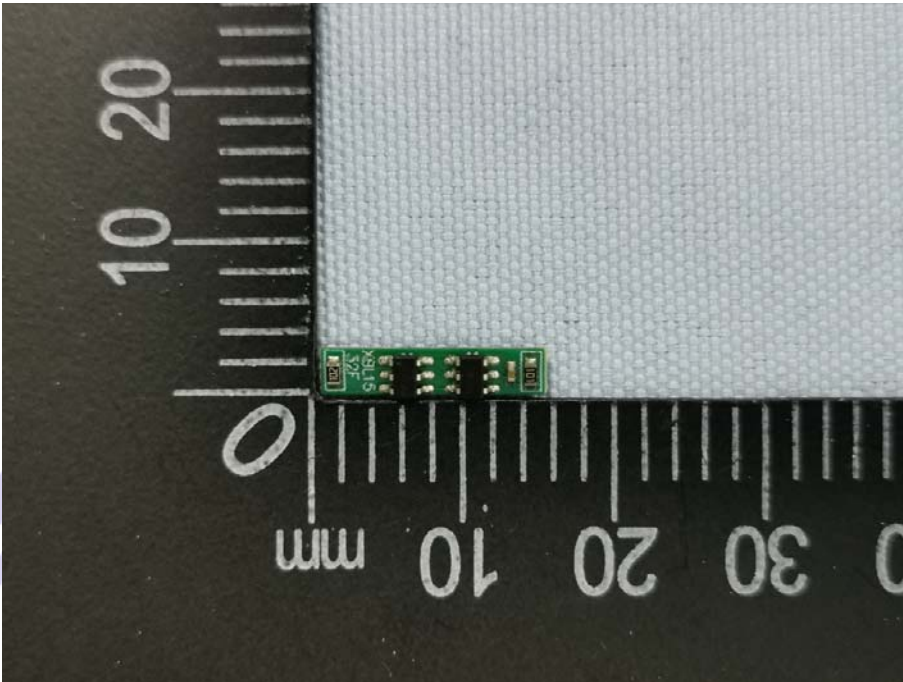
|             |  |
|-------------|--|
| Details of: | Fig.3–Front view of PCM  |
|             |  <p>A photograph showing the front view of a small green printed circuit board (PCM) component. The component is rectangular and features several gold-colored pads and a small black chip. It is placed on a black ruler with white markings for scale. The ruler shows centimeter and millimeter markings, with '10', '20', and '30' visible. The component is positioned between the 10mm and 20mm marks.</p> |
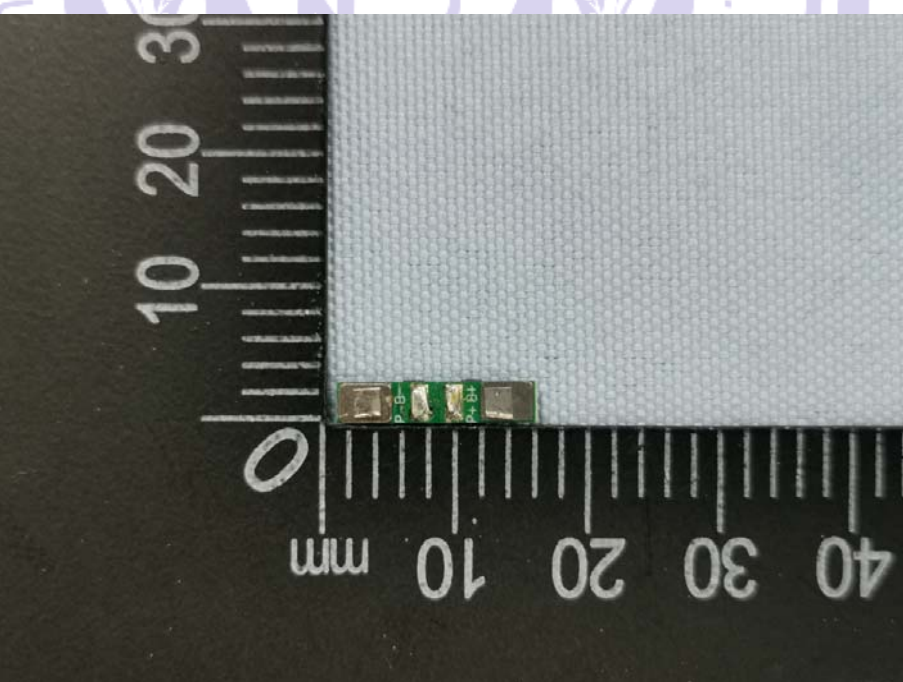
|             |  |
|-------------|--|
| Details of: | Fig.4–Back view of PCM   |
|             |  <p>A photograph showing the back view of the same green printed circuit board (PCM) component. The back side features two gold-colored pads labeled 'PB' and 'PB+'. The component is placed on a black ruler with white markings for scale. The ruler shows centimeter and millimeter markings, with '10', '20', '30', and '40' visible. The component is positioned between the 10mm and 20mm marks.</p> |

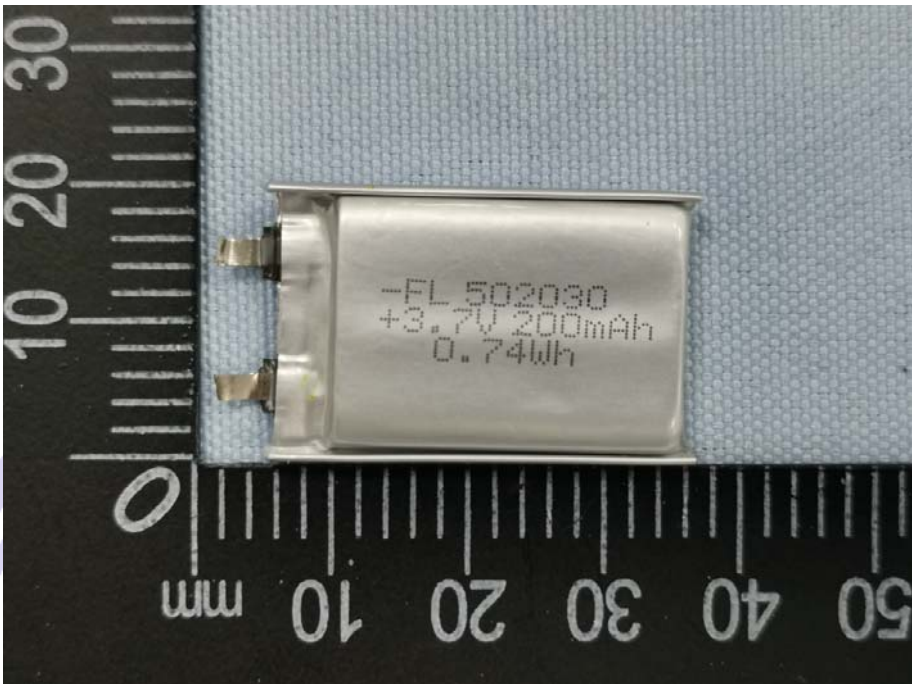

|                    |   |
|--------------------|---|
| <p>Details of:</p> | <p>Fig.5–Front view of cell 502030</p>  <p>The image shows the front view of a rectangular lithium-ion cell. The cell is silver-colored with two gold-colored terminals on the left side. It is placed on a blue fabric surface next to a black ruler with white markings. The ruler shows the cell's length is approximately 30 mm and its width is approximately 15 mm. The text on the cell reads: -FL 502030, +3.7V 200mAh, 0.74Wh.</p> |
|--------------------|---|
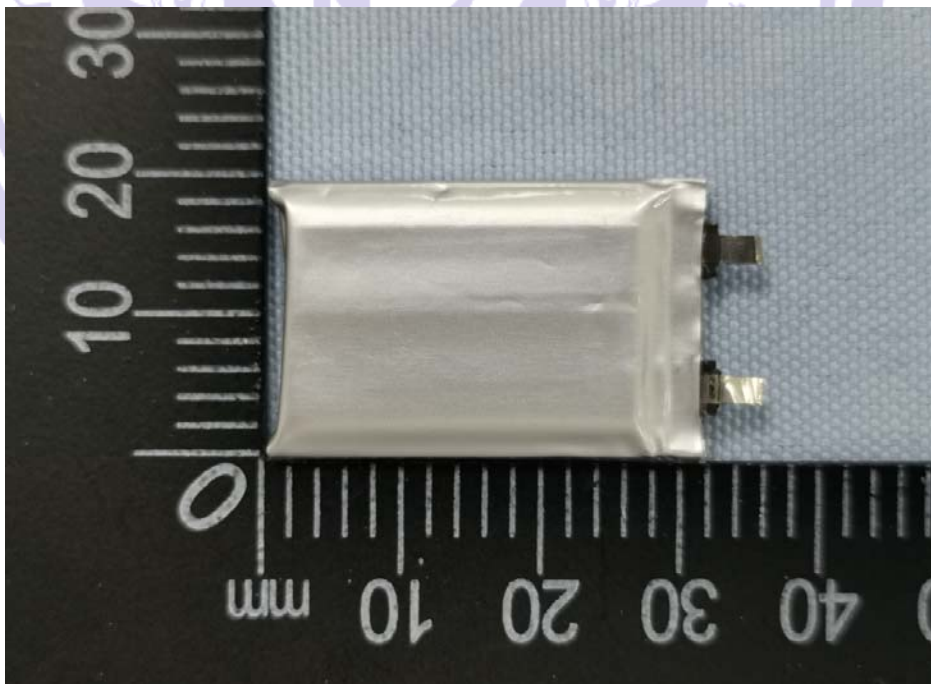
|                    |   |
|--------------------|---|
| <p>Details of:</p> | <p>Fig. 6–Back view of cell 502030</p>  <p>The image shows the back view of the same rectangular lithium-ion cell. The back is a plain, slightly wrinkled silver-colored surface. The two gold-colored terminals are visible on the right side. The cell is placed on a blue fabric surface next to a black ruler with white markings, showing its dimensions are consistent with the front view.</p> |
|--------------------|---|

---End of Test Report---