

Radio Test Report

Report No.: AGC05443241219ER02

PRODUCT DESIGNATION: Bamboo wireless charger

BRAND NAME : N/A

MODEL NAME : MO6924

APPLICANT: MID OCEAN BRANDS B.V.

DATE OF ISSUE : Jan. 13, 2025

STANDARD(S) : ETSI EN 303 417 V1.1.1 (2017-09)

REPORT VERSION: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



Page 2 of 32

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Jan. 13, 2025	Valid	Initial Release






Table of Contents

1. General Information	4
2. Product Information	5
2.1 Product Technical Description	5
2.2 Objective	6
2.3 Test Items and The Results	6
2.3 Overview of Operational Modes within a WPT System	7
2.4 Description of Test Modes	7
3. Setup of Equipment Under Test	8
3.1 Setup Configuration of EUT	8
3.2 Support Equipment	9
4. Test Environment	10
4.1 Address of The Test Laboratory	10
4.2 Test Facility	10
4.3 Environmental Conditions	11
4.4 Measurement Uncertainty	11
4.5 List of Equipment Used	12
5. ETSI EN 303 417 Requirements for Transmitter and Receiver	13
5.1 Operating Frequency Ranges and Permitted Range of Operating Frequencies	13
5.2 Transmitter H-Field Requirements	16
5.3 Transmitter Out of Band (OOB) Emissions	19
5.4 Transmitter Spurious Emissions (Frequency Below 30MHz)	22
5.5 Transmitter Spurious Emissions (Frequency Above 30MHz)	25
5.6 Receiver Blocking	29
Appendix I: Photographs of Test Setup	31
Appendix II: Photographs of Test EUT	32



Page 4 of 32

1. General Information

Applicant	MID OCEAN BRANDS B.V.
Address	7/F. Kings Tower, 111 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong
Manufacturer	MID OCEAN BRANDS B.V.
Address	7/F. Kings Tower, 111 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong
Factory	MID OCEAN BRANDS B.V.
Address	7/F. Kings Tower, 111 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong
Product Designation	Bamboo wireless charger
Brand Name	N/A
Test Model	MO6924
Series Model(s)	N/A
Difference Description	N/A
Date of receipt of test item	Dec. 23, 2024
Date of Test	Dec. 23, 2024~Jan. 13, 2025
Deviation from Standard	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Test Report Form No	AGCER-EU-WPT-V1
-	

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By	Bibo zhang	
	Bibo Zhang (Project Engineer)	Jan. 13, 2025
Reviewed By	Colvin Liu	
	Calvin Liu (Reviewer)	Jan. 13, 2025
Approved By	Angole li	
	Angela Li (Authorized Officer)	Jan. 13, 2025



Page 5 of 32

2. Product Information

2.1 Product Technical Description

Equipment Type	WPT System
	☐WPT Band 1: 19~21kHz
	☐WPT Band 2: 59~61kHz
Dormitted Dongs of Operating Fraguency	☐WPT Band 3: 79~90kHz
Permitted Range of Operating Frequency	⊠WPT Band 4: 100~119kHz,119~140kHz,140~148.5kHz
	⊠WPT Band 4: 148.5~300kHz
	□WPT Band 5: 6765kHz~6795kHz
Operation Frequency	110kHz-205kHz
Hardware Version	V1.0
Software Version	V1.0
Modulation Type	ASK
Corrected Amplitude H-field@10m	18.48dBµA/m (Max.)
Antenna Designation	Coil Antenna
Antenna Gain	0dBi
Input Rating	DC 9V 2A; DC 9V 2.22A; DC 5V 2A
Wireless Charging Output Power	5W, 7.5W, 10W,15W Max

Note: For more details, refer to the user's manual of the EUT.



Page 6 of 32

2.2 Objective

Perform Radio Spectrum tests for CE Marking according to the provisions of article 3.2 of the Radio Equipment Directive (2014/53/EU) for the WPT function of the EUT.

2.3 Test Items and The Results

The tests were performed according to following standards:

ETSI EN 303 417 V1.1.1
(2017-09)

Wireless power transmission systems, using technologies other than radio frequency beam in the 19-21kHz,59-61kHz,79-90kHz,100-300 kHz, 6765-6795kHz ranges; Harmonised Standard covering the essential requirements of article 3.2 of Directive 2014/53/EU

Test items and the results are as bellow:

No.	Test Item	Standard Require	Condition	Result			
	Harmonised Standard ETSI EN 303 417						
1	Permitted range of Operating Frequencies	sub-clause 4.3.2	/	Pass			
2	Operating Frequency Ranges	sub-clause 4.3.3	/	Pass			
3	H-field Requirements	sub-clause 4.3.4	/	Pass			
4	Transmitter Spurious Emissions	sub-clause 4.3.5	/	Pass			
5	Transmitter Out of Band (OOB) Emissions	sub-clause 4.3.6	/	Pass			
6	WPT System Unwanted Conducted Emissions	sub-clause 4.3.7	Only for equipment which has a cable between the off board power supply and the primary coil which is longer than 3 m	N/A			
7	Receiver Blocking	sub-clause 4.4.2	Only for Mode1, Mode2 and Mode3 (see Table 2)	Pass			

Note: N/A means not applicable. This equipment does not meet the above test item evaluation conditions, so it is not applicable.



Report No.: AGC05443241219ER02 Page 7 of 32

2.3 Overview of Operational Modes within a WPT System


EN 303 417 Clauses 4.2.3 Table 2: Overview of operational modes within a WPT system						
Operational Mode Set-up		Function of base station	Function of mobile device	Test Scenario	Conformance Requirements	
Mode 1: base station in stand-by, idle mode	Single device	TX	Not applicable	Single radiation test (TX) with the base station/charging pad. The test set-up as described in clause 6.1.2 shall be used.	Operating frequency range (clause 4.3.3) H-Field emission (clause 4.3.4) TX spurious (clauses 4.3.5, 4.3.6 and 4.3.7) Performance criteria test (RX test) (clause 4.4)	
Mode 2: Communication before charging, adjustment charging mode / position	In combination	TX and RX	TX and RX	Specific test setup, declared by the manufacturer. Manufacturer shall declare the maximal distance between base station and mobile device the WPT system is able to communicate (distance D). The test setup- up shall be performed with the largest communication distance. The test set-up as described in clause 6.1.3 shall be used.	Operating frequency range (clause 4.3.3) H-Field emission (clause 4.3.4) TX spurious (clause 4.3.5, 4.3.6 and 4.3.7) Wanted performance criteria test (RX test) (clause 4.4)	
Mode 3: Communication	WPT system alignment	TX and RX	TX and RX	Worst case alignment Both tests can be performed	Operating frequency range (clause 4.3.3) H-Field emission (clause 4.3.4)	
Mode 4: energy transmission	WPT system alignment	TX and RX	TX and RX	within one set-up, worst-case alignment. The test set-up as described in clause 6.1.4 shall be used.	TX spurious (clauses 4.3.5, 4.3.6 and 4.3.7) Wanted Performance criteria test (RX test) (clause 4.4)	

2.4 Description of Test Modes

No.	Toot Mode Description		Test Channel			
INO.	Test Mode Description	Lowest	Middle	Highest		
1	base station in stand-by, idle mode	/				
2	Communication before charging, adjustment charging mode / position	/	/	/		
3	Communication		140.4kHz			
4	Energy transmission	111.6kHz	140.4kHz	203.3kHz		

Note:

- 1) During the initial establishment of the charging mode (mode 2), no or very low emission occur (below the sensitivity level of the test set-up), so the mode 2 can be assumed as irrelevant for the test.
- 2) Mode 1 is only for base station function equipment and is not taken into consideration
- 3) Mode 3 and mode 4 have been performed within one set-up, worst-case alignment.
- 4) The communication frequency 140.4 kHz corresponds to the maximum field strength.







3. Setup of Equipment Under Test

3.1 Setup Configuration of EUT


♦ Mode 1: Idle Mode

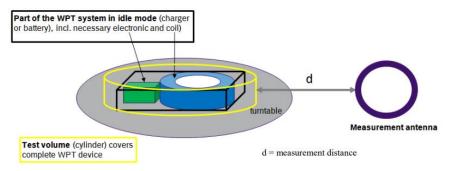

Mode 2: Charging Adjustment

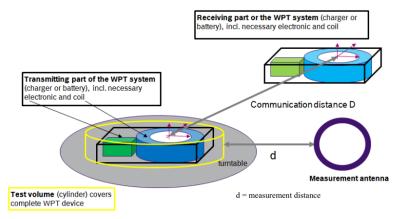

♦ Mode 3 and Mode 4: Power Transmission Arrangement

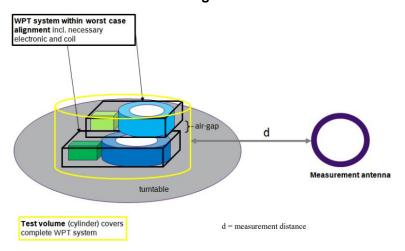



Page 9 of 32

3.2 Support Equipment

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The following peripheral devices and interface cables were connected during the measurement:

Whe	Whether support unit is used?					
Yes	Yes					
Ite m	Equipment	Manufacturer	Model No.	Specification		
1	Wireless Charging Load	YBZ	N/A	Support 5W,7.5W,10W,15W		
2	Adapter	HUAWEI	HW-200440 C00	Input(AC):100V-240V 50/60Hz 2.4A Output(DC):USB-C(5V/3A;9V/3A;10V/4A;11V/6A;12V/3A;15V/3A; 20V4.4A) USB-A(5V/2A;10V/4A;11V/6A;20V/4.4A)		



Page 10 of 32

4. Test Environment

4.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

4.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories.)

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842(CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



Page 11 of 32

4.3 Environmental Conditions

Normal Condition	VN=nominal Voltage	DC 5V, DC 9V
Normal Condition	TN=normal Temperature	25 °C
	VL=lower Voltage	DC 4.5V, DC 8.1V
Extrama Candition	TL=lower Temperature	-20 °C
Extreme Condition	VH=higher Voltage	DC 5.5V, DC 9.9V
	TH=higher Temperature	-40 °C

Note: The maximum temperature of 40 is not a standard requirement and is measured according to the maximum service temperature stated by the manufacturer.

4.4 Measurement Uncertainty

Test Items	Measurement Uncertainty
Frequency error	± 1 x 10 ⁻⁷
Transmitter power conducted	± 0.75dB
Maximum Frequency Deviation: Within 300Hz and 6KHz of Audio Frequency Within 6KHz and 25KHz of Audio Frequency	± 5% ± 3dB
Adjacent channel power	± 3dB
Conducted Emission of Transmitter, Valid Up to 12.75GHz	± 4dB
Conducted Emissions of Receivers	± 3dB
Radiated Emission of Transmitter, Valid Up to 12.75GHz	± 6dB

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.



Page 12 of 32

4.5 List of Equipment Used

• R	RF Conducted Test System								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)		
\boxtimes	AGC-ER-E086	Spectrum Analyzer	KEYSIGHT	N9020A	MY53300860	2024-05-23	2025-05-22		
\boxtimes	AGC-EM-E002	Wireless Connectivity Tester	HP	8920B	US35010106	2024-05-23	2025-05-22		
\boxtimes	AGC-ER-E059	Signal Generator	Agilent	N5182B	MY53050647	2024-02-01	2025-01-31		
\boxtimes	AGC-ER-E037	Signal Generator	Agilent	N5182A	MY50140530	2024-05-23	2025-05-22		
\boxtimes	AGC-ER-E075	Small Environmental Tester	SH-242	ESPEC	93008290	2024-08-02	2026-07-23		
\boxtimes	AGC-EM-A007	30dB Attenuator	Weinachel	58-30-33	ML030	2023-06-01	2025-05-31		
\boxtimes	AGC-ER-A004	Power splitter	Agilent	1167B	/	2023-06-01	2025-05-31		
\boxtimes	N/A	RF Connection Cable	N/A	1#	N/A	Each time	N/A		
\boxtimes	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A		

• F	Radiated Spurious Emission& RF Conducted Test									
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)			
	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2024-02-01	2025-01-31			
\boxtimes	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2024-05-24	2025-05-23			
\boxtimes	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2024-05-28	2025-05-27			
\boxtimes	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10			
\boxtimes	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2024-03-31	2025-03-30			
\boxtimes	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2024-08-03	2026-07-23			
\boxtimes	AGC-EM-A088	UHF Filter	N/A	N/A	N/A	2024-05-23	2025-05-22			
	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	N/A	N/A			

• Te	Test Software							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information			
\boxtimes	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0			



5. ETSI EN 303 417 Requirements for Transmitter and Receiver

5.1 Operating Frequency Ranges and Permitted Range of Operating Frequencies

Test Limit

The permitted range of operating frequency range(s) for intentional emissions shall be within 19 - 21 kHz, 59 - 61 kHz, 79 - 90 kHz, 100 - 300 kHz, 6 765 - 6 795 kHz,

Test Description

- ◆ The operating frequency range is the frequency range over which the WPT system is intentionally transmitting (all operational modes, see clause 4.2.3, Table 2).
- ◆ The operating frequency range(s) of the WPT system are determined by the lowest (f_L) and highest frequency (f_H) as occupied by the power envelope.
- ◆ The WPT system could have more than one operating frequency range. For a single frequency systems the OFR is equal to the occupied bandwidth (OBW) of the WPT system.
- ◆ For multi-frequency systems the OFR is described in Figures 2 and 3.

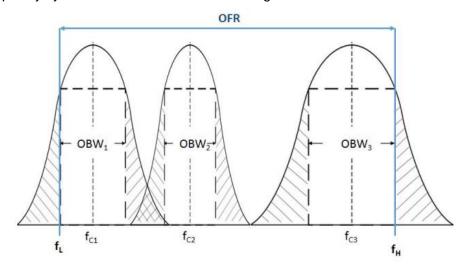


Figure 2: OFR of a multi - frequency WPT system within one frequency range of Table 2 and within one WPT system cycle time


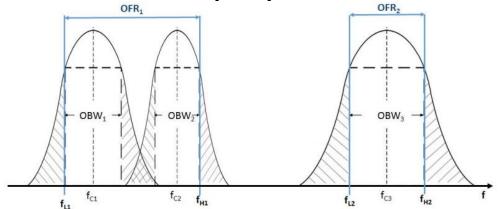


Figure 3: OFR of a multi - frequency WPT system within two frequency ranges of Table 2 and within one WPT system cycle time



Test Setup

Report No.: AGC05443241219ER02 Page 14 of 32

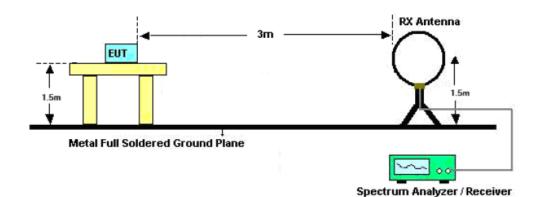

Test Procedure

- 1. The EUT was placed on a turn table which is 1.5m above ground plane.
- 2. The EUT was modulated by normal signal,
- 3. Set SPA Center Frequency = fundamental frequency, RBW=VBW=200Hz, Span=5kHz, Detector=RMS. The 99 % OBW function shall be used to determine the operating frequency range, f_H is the frequency of the upper marker resulting from the OFR, f_L is the frequency of the lower marker resulting from the OFR.
- 4. Both normal test condition and extreme test condition applied



Test Result

⊠Test Mode: Mode 3

Frequency (kHz)	Test Co	onditions	99%	F _L at 99% BW	F _H at	Limit Band	
	Temperature (°C)	Voltage (V)	· //////		99% BW (kHz)	(kHz)	Result
	-20	8.1	0.691	140.057	140.748		Pass
	-20	9.9	0.693	140.055	140.748		Pass
140.4	25 50	9.0	0.699	140.051	140.750	100~300	Pass
		8.1	0.694	140.052	140.747		Pass
		9.9	0.694	140.051	140.745		Pass

Report No.: AGC05443241219ER02

Page 15 of 32

⊠Test Mode: Mode 4

Frequency Range	Test Con	nditions	Lower	Upper	Limit
(kHz)	Temperature (°C)	Voltage (V)	Frequency (kHz)	Frequency (kHz)	Band (kHz)
	20	8.1	111.261	203.692	
	-20	9.9	111.260	203.694	
111.6-203.3	25	9.0	111.259	203.695	100~300
	50	8.1	111.261	203.695	
	50	9.9	111.261	203.694	
OFR			92.436kHz		
Result			Pass		



Page 16 of 32

5.2 Transmitter H-Field Requirements

Test Limit

• The H-field limits are provided in Table 3.

 They have been specified for control of any radiated emissions within the OFR originating from the WPT system (power transmission and accompanying data communication).

• The H-field limits in Table 3 are EU wide harmonised according to EC Decision 2013/752/EU [i.2]. Further information is available in CEPT/ERC/REC 70-03 [i.1].

Tabl	e 3:	H-fie	ıld li	mits

Frequency range [MHz]	H-field strength limit [dBµA/m at 10 m]	Comments
0,019 ≤ f < 0,021	72	
0,059 ≤ f < 0,061	69,1 descending 10 dB/dec above 0,059 MHz	See note 1
0,079 ≤ f < 0,090	67,8 descending 10 dB/dec above 0,079 MHz	See note 2
0,100 ≤ f < 0,119	42	
0,119 ≤ f < 0,135	66 descending 10 dB/dec above 0,119 MHz	See note 1
0,135 ≤ f < 0,140	42	
$0,140 \le f < 0,1485$	37,7	
$0,1485 \le f < 0,30$	-5	
6,765 ≤ f < 6,795	42	

NOTE 1: Limit is 42 dBμA/m for the following spot frequencies: 60 kHz ± 250 Hz and 129,1 kHz ± 500 Hz.
 NOTE 2: At the time of preparation of the present document the feasibility of increased limits for high power wireless power transmission systems to charge vehicles [i.4] was prepared. New specific requirements for such systems (e.g. higher H-field emission limits in the 79 - 90 kHz band) will be reflected within a future revision of the present document.

▶ The H-field limit in dBµA/m at 3 m, H_{3m}, is determined by the following equation:

$$H_{3m} = H_{10m} + C_3 (F.2)$$

Where: H_{10m} is the H-field limit in dBμA/m at 10 m distance according to the present document; and C₃ is a conversion factor in dB determined from figure F.2.

Correction factor, C₃, for limits at 3 m distance, dB


Figure H.2: Conversion factor C₃ versus frequency

- \triangleright E(dB μ V/m) = dB μ A/m+51.5;
- ERP (dBm)=E(dBμV/m) +20lg(D)-104.8, D is the measurement distance;
- ERP=10lgP(mW)



Test Setup

Report No.: AGC05443241219ER02 Page 17 of 32

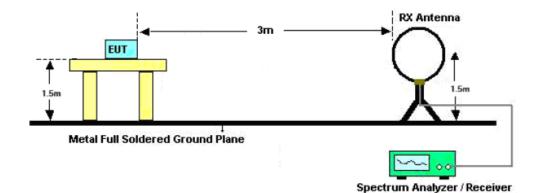

Test Procedure

- 1. The EUT was placed on the top of an insulating table 1.5 meters above the ground at a semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- 3. The H-field is measured with a shielded loop antenna connected to a measurement receiver.
- 4. The measuring bandwidth and detector type of the measurement receiver shall be in accordance with EN 300 330 V2.1.1 clause 5.12.
- 5. The EUT operate with modulation under normal and extreme conditions.



Test Result

Report No.: AGC05443241219ER02 Page 18 of 32

Test conditions	Test Temp.	Test Volt.	Note
TN/VN	25°C	9.0V	Worst case
TL/ VL	-10°C	8.1V	
TH/VL	40°C	9.9V	
TL/VH	-10°C	8.1V	
TH/VH	40°C	9.9V	

⊠Test Mode: Mode 3

Frequency (kHz)	Reading (dBµA/m)	Factor (dB)	Field Strength (dBµV/m@3m)	Field Strength (dBµA/m@3m)	Calculated (dBµA/m@10m)	Limit at 10m (dBµA/m@10m)	Result
140.4	41.37	27.15	68.52	17.02	-14.18	37.70	Pass

⊠Test Mode: Mode 4

Freque (kHz	•	ading µA/m)	Factor (dB)	E-Field Strength (dBµV/m@3m)	H-Field Strength (dBµA/m@3m)	Calculated (dBµA/m@10m)	Limit at 10m (dBµA/m@10m)	Result
111.6	5 40	0.22	27.15	67.37	15.87	-15.33	42.00	Pass
140.	4 41	1.37	27.15	68.52	17.02	-14.18	37.70	Pass
203.	3 40	0.79	27.15	67.94	16.44	-14.76	-5.00	Pass

Remark:

- 1. Field Strength at 3m(dBμA/m) = Reading Level + Corrected Factor
- 2. Calculated at 10m(dBµA/m) = Field Strength at 3m(dBµA/m)-31.2dB
- 3. For the calculated method, please refer to Annex F at EN 300330.



5.3 Transmitter Out of Band (OOB) Emissions

Test Limit

The OOB limits are visualized in Figures 4 and 5; they are descending from the intentional limits from Table 3 at f_H/f_L with 10 dB/decade.

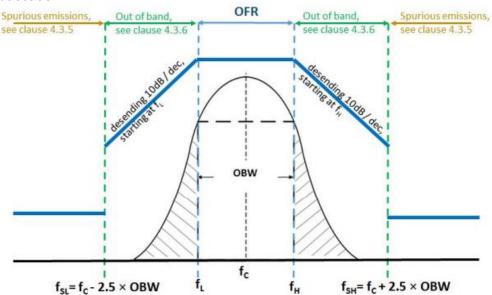


Figure 4: Out of band and spurious domain of a single frequency WPT system

The transmitter spurious emissions for a multi frequency system (within one WPT frequency range from Table 2) are to be considered in frequency ranges defined in Figure 5 ($f < f_{SL}$ and $f > f_{SH}$)


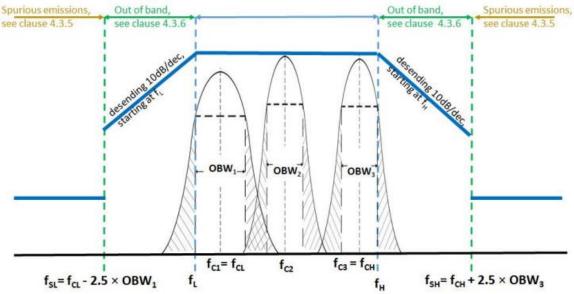


Figure 5: Out of band and spurious domain of a multi - frequency system (during one WPT system cycle time)



Test Setup

Report No.: AGC05443241219ER02 Page 20 of 32

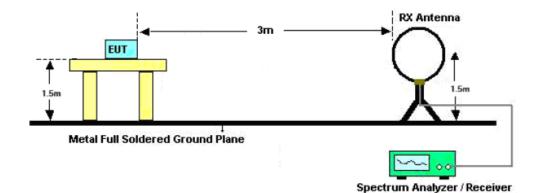

Test Procedure

- 1. The EUT was placed on a turn table which is 1.5m above ground plane.
- 2. The EUT was modulated by normal signal,
- 3. Set SPA Center Frequency = fundamental frequency, RBW=VBW=200Hz, Span=5KHz, Detector=RMS. The 99 % OBW function shall be used to determine the operating frequency range, f_H is the frequency of the upper marker resulting from the OFR, f_L is the frequency of the lower marker resulting from the OFR.
- 4. Both normal test condition and extreme test condition applied



Test Result

⊠Test Mode: Mode 3

Test Frequency (kHz)	Frequency Range (kHz)		Maximum level @10m (dBµA/m)	Limit @ 10m (dBµA/m)	Result
	f _{SL} -f _L	138.653 - 140.051	Less than -23.34	See figure 4	Pass
440.4	f _L	140.051	-23.34	37.70	Pass
140.4	f _H	140.750	-23.86	37.70	Pass
	f _H -f _{SH}	140.75 - 142.148	Less than -23.86	See figure 4	Pass

Report No.: AGC05443241219ER02

Page 21 of 32

⊠Test Mode: Mode 4

Test Frequency (kHz)	Frequency Range (kHz)		Maximum level @10m (dBµA/m)	Limit @ 10m (dBµA/m)	Result
	f _{SL} -f _L	109.895 - 111.259	Less than -24.49	See figure 4	Pass
111.6-203.3	f_L	111.259	-24.49	42.00	Pass
	f _H	203.695	-24.44	-5.00	Pass
	f _H -f _{SH}	203.695 - 205.275	Less than -24.44	See figure 4	Pass



Page 22 of 32


5.4 Transmitter Spurious Emissions (Frequency Below 30MHz)

Test Limit

Operating Mode						
Frequency Range	Distance	Maximum Field Strength Limit				
9 kHz ≤ f < 10 MHz	10m	27dBμA/m at 9 kHz descending 3 dB/oct				
10 MHz ≤ f < 30 MHz	10m	-3.5 dBμA/m				
	Stand-by Mo	ode				
9 kHz ≤ f < 10 MHz	10m	5.5dBµA/m at 9 kHz descending 3 dB/oct				
10 MHz ≤ f < 30 MHz	10m	-25 dBµA/m				

Note: "Operating" means mode 2, 3 and 4 according to Table 2; "standby" means mode 1 according to Table 2.

Test Setup

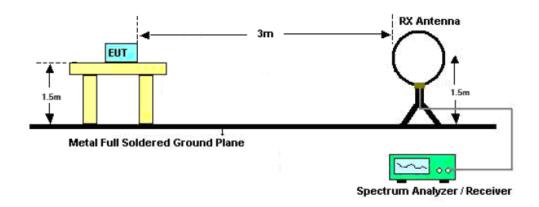

Test Procedure

- ◆ For test method of frequency range (9 kHz-30MHz)
- 1. The EUT was placed on the top of an insulating table 1.5 meters above the ground at a semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- 3. The H-field is measured with a shielded loop antenna connected to a measurement receiver.
- The measuring bandwidth and detector type of the measurement receiver shall be in accordance with EN 300 330 V2.1.1 clause 5.12



Test Result

Report No.: AGC05443241219ER02 Page 23 of 32

	Transmitter Spurious Emissions for 9kHz to 30MHz										
Frequency (MHz)	Reading (dBµV)	Factor (dB/m)	E-Field Strength@3m (dВµV/m)	E-Field Strength@10m (dВµV/m)	Calculated@10m (dBµA/m)	Limit@10m (dBµA/m)	Margin (dB)				
0.031	20.43	35.88	56.31	45.85	-5.65	21.66	27.31				
0.273	17.73	33.13	50.86	40.40	-11.10	12.18	23.27				
0.612	14.48	33.13	47.61	37.15	-14.35	8.68	23.03				
2.037	14.83	25.45	40.28	29.82	-21.68	3.45	25.13				
3.132	12.42	22.66	35.08	24.62	-26.88	1.58	28.47				
5.794	10.91	18.56	29.47	19.01	-32.49	-1.09	31.40				

	Transmitter Spurious Emissions for 9kHz to 30MHz									
Frequency (MHz)	Reading (dBµV)	Factor (dB/m)	E-Field Strength@3m (dВµV/m)	E-Field Strength@10m (dВµV/m)	Calculated@10m (dBµA/m)	Limit@10m (dBµA/m)	Margin (dB)			
0.052	20.79	35.88	56.67	46.21	-5.29	19.37	24.66			
0.294	17.48	33.13	50.61	40.15	-11.35	11.86	23.21			
0.610	14.49	33.13	47.62	37.16	-14.34	8.69	23.03			
2.035	14.70	25.45	40.15	29.69	-21.81	3.46	25.27			
3.348	12.41	22.66	35.07	24.61	-26.89	1.30	28.19			
5.257	10.92	18.56	29.48	19.02	-32.48	-0.67	31.81			



Page 24 of 32

	Transmitter Spurious Emissions for 9kHz to 30MHz										
Frequency (MHz)	Reading (dBµV)	Factor (dB/m)	E-Field Strength@3m (dBµV/m)	E-Field Strength@10m (dBµV/m)	Calculated@10m (dBµA/m)	Limit@10m (dBµA/m)	Margin (dB)				
35.88	56.57	46.11	-5.39	21.47	26.86	35.88	56.57				
33.13	50.83	40.37	-11.13	12.45	23.57	33.13	50.83				
33.13	47.85	37.39	-14.11	9.92	24.03	33.13	47.85				
25.45	40.07	29.61	-21.89	4.90	26.79	25.45	40.07				
22.66	35.16	24.70	-26.80	2.21	29.01	22.66	35.16				
18.56	29.73	19.27	-32.23	0.39	32.62	18.56	29.73				

☑Test Mode: Mode 4 (Operating Mode: Side), Lowest Channel Worst Case

	Transmitter Spurious Emissions for 9kHz to 30MHz									
Frequency (MHz)	Reading (dBµV)	Factor (dB/m)	E-Field Strength@3m (dВµV/m)	E-Field Strength@10m (dBµV/m)	Calculated@10m (dBµA/m)	Limit@10m (dBµA/m)	Margin (dB)			
35.88	56.50	46.04	-5.46	22.71	28.17	35.88	56.50			
33.13	50.77	40.31	-11.19	11.59	22.78	33.13	50.77			
33.13	47.83	37.37	-14.13	8.87	23.00	33.13	47.83			
25.45	40.27	29.81	-21.69	5.31	27.00	25.45	40.27			
22.66	35.01	24.55	-26.95	1.23	28.18	22.66	35.01			
18.56	29.48	19.02	-32.48	1.78	34.26	18.56	29.48			

Notes:

- 1. Negative sign (-) in the margin column signify levels below the limit.
- 2. Other emissions found were at least 20 dB below the limit.
- 3. E-Field Strength@3m(dB μ V/m) = Reading Level + Factor
- 4. E-Field Strength@10m(dB μ V/m) = E-Field Strength@3m(dB μ V/m)+10.46dB
- 5. H-Field Strength(dBμA/m)= E-Field Strength(dBμV/m)-51.5dB




5.5 Transmitter Spurious Emissions (Frequency Above 30MHz)

Spurious emissions are emissions at frequencies other than those of the carrier and sidebands associated with normal modulation.

Test Limit

Frequency Range	Operating Mode Limit	Standby Mode Limit
47 MHz to 74 MHz	4 nW	2 nW
87.5 MHz to 118 MHz	4 nW	2 nW
174 MHz to 230 MHz	4 nW	2 nW
470 MHz to 790 MHz	4 nW	2 nW
Other frequency between 30 MHz to 1000 MHz	250 nW	2 nW

Test Setup

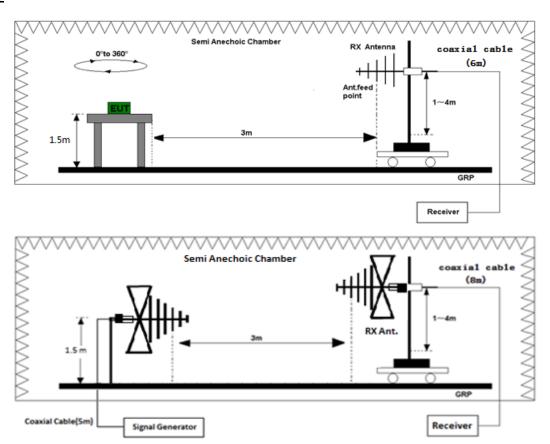


Radiated Emission Test Set-Up Frequency 30 MHz ~ 1 GHz



Page 26 of 32


Test Procedure

- ◆ For test method of frequency range (30 MHz-1000MHz)
- 1. EUT was placed on a 1.5m height wooden table. The search antenna is placed at 3m distances from the EUT and search antenna height is from 1-4m. With the transmitter operating at continuously mode, the turntable was slowly rotated to locate the direction of maximum emission. Once maximum direction is determined, the search antenna was raised and lowered in both vertical and horizontal polarizations.
- 2. The EUT was removed from the turntable and replaced with a linearly polarized antenna connected to a calibrated RF signal generator. The RF generator was set to a measured emission frequency and the search antenna was raised and lowered to produce a maximum received reading. The generator output was increased to match the radiated emission reading measured previously, and the result expressed in dB EIRP or ERP, correcting for substitution antenna gain at each frequency.
- 3. Factor=Antenna Factor + Cable loss, Margin=Limit- Measurement Level.
- 4. The "Factor" value can be calculated automatically by software of measurement system.
- 5. All test modes had been pre-tested. The worst case and recorded in the report.






Test Result

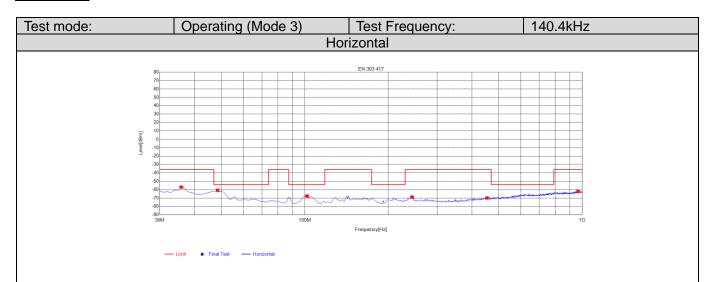

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	35.82	-86.26	-56.98	-36.00	20.98	29.28	48	Horizontal
2	48.43	-89.63	-60.82	-54.00	6.82	28.81	0	Horizontal
3	101.78	-88.03	-67.65	-54.00	13.65	20.38	350	Horizontal
4	243.4	-96.82	-68.85	-36.00	32.85	27.97	173	Horizontal
5	452.92	-100.99	-69.94	-36.00	33.94	31.05	244	Horizontal
6	964.11	-100.67	-62.06	-36.00	26.06	38.61	128	Horizontal




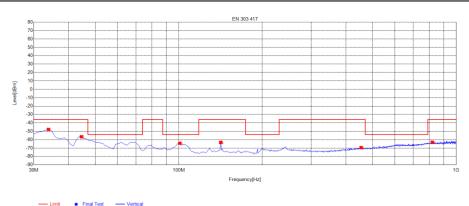


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	33.88	-77.07	-47.86	-36.00	11.86	29.21	99	Vertical
2	44.55	-85.67	-56.56	-36.00	20.56	29.11	285	Vertical
3	100.81	-84.72	-64.37	-54.00	10.37	20.35	90	Vertical
4	141.55	-90.44	-63.26	-36.00	27.26	27.18	285	Vertical
5	453.89	-100.62	-69.55	-36.00	33.55	31.07	10	Vertical
6	819.58	-100.66	-63.18	-36.00	27.18	37.48	232	Vertical

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/






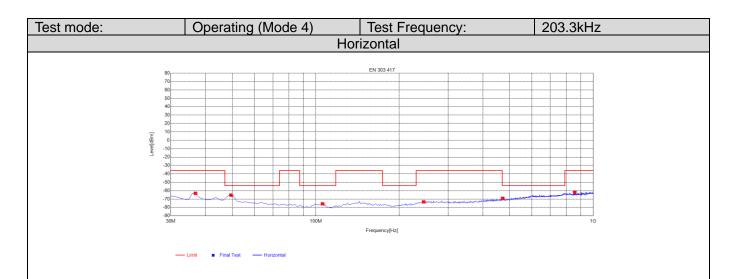

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	36.79	-92.56	-63.23	-36.00	27.23	29.33	350	Horizontal
2	49.4	-94.10	-65.36	-54.00	11.36	28.74	22	Horizontal
3	105.66	-96.21	-75.71	-54.00	21.71	20.50	323	Horizontal
4	244.37	-101.50	-73.42	-36.00	37.42	28.08	119	Horizontal
5	471.35	-100.54	-69.18	-54.00	15.18	31.36	199	Horizontal
6	856.44	-99.17	-62.01	-36.00	26.01	37.16	305	Horizontal



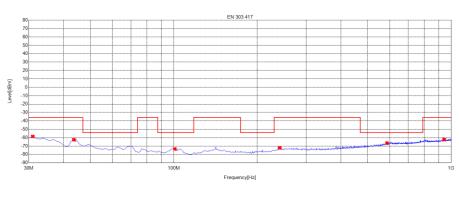

Limit	*	Final Test	_	Vertical

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	30.97	-87.71	-58.61	-36.00	22.61	29.10	99	Vertical
2	43.58	-91.65	-62.46	-36.00	26.46	29.19	188	Vertical
3	100.81	-93.87	-73.52	-54.00	19.52	20.35	360	Vertical
4	240.49	-99.94	-72.28	-36.00	36.28	27.66	303	Vertical
5	586.78	-100.72	-66.41	-54.00	12.41	34.31	126	Vertical
6	941.8	-100.53	-62.17	-36.00	26.17	38.36	360	Vertical

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Page 29 of 32

5.6 Receiver Blocking

Test Limit

The EUT shall achieve the wanted performance criterion, in the presence of the blocking signal.

	In-band signal	OOB signal	Remote-band signal			
Frequency	Centre frequency (f _c) of the WPT system (see clause 4.3.3)	$f = f_c \pm F$ (see note)	$f = f_c \pm 10^*F$ (see note)			
Signal level field strength at the EUT	72dBμA/m	72dBμA/m	82dBµA/m			
Note: F = OFR see clause 4.3.3.						

Test Setup

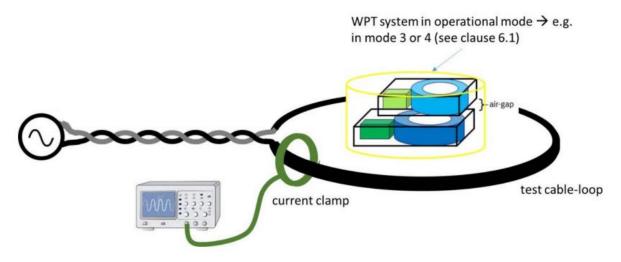


Figure 11: Schematic test set-up for the RX-blocking test

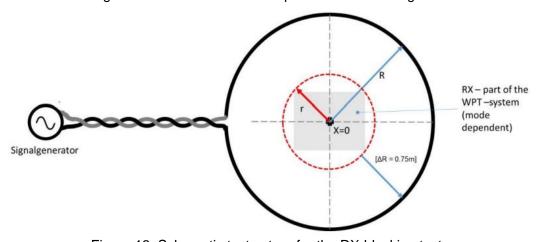


Figure 12: Schematic test set-up for the RX-blocking test



Page 30 of 32

Test Procedure

The fulfilment of the WPT system performance criterion in all possible operational modes (see clause 4.2.3) shall be tested in presence of the inference signals according to Table 6.


- The manufacturer shall declare in which device orientation(s) (worst case) the test shall be performed.
- The WPT system shall initially operate without interference according to its specified sensitivity (detecting an specific object in the maximum depth as declared by the manufacturer (see clause 4.2.2 on wanted performance criteria)).
- The test setup is visualized in the following Figures 11 and 12.
- The tool shall be operated as intended (e.g. some tools might require to be moved across the object, some tool can be used stationary).
- The test shall be carried out inside a test chamber according to clauses C.1.1 and C.1.2 in ETSI EN 300 330 [1].
- A test loop with a radius r shall be used to create the magnetic field; the test loop shall lie on a non-metallic ground and the minimum distance to metallic objects (e.g. ground plane) shall be 0,75 m.
- The EUT shall be placed to the centre of the test-loop (e.g. see Figures 11 and 12).
- The test loop shall be sufficiently large so that the test loop itself does not influence the WPT system; The radius R of the test-loop shall be in minimum $\Delta R = 0.75$ m larger than the maximum dimension r of the EUT.
- (See Figure 12): R >= r + ΔR.
- The maximum H-Field can be calculated from the loop current I (into the test-loop) with the following formula:

$$H = \frac{I}{2R}$$

Test Result

⊠Test Mode: Mode 3

Interference Type	Test Frequency (kHz)	Signal level @ EUT	Performance	Result
In-band signal	140.4	72dBuA/m	No function loss	Pass
OOB signal	139.701	72dBuA/m	No function loss	Pass
	141.099	72dBuA/m	No function loss	Pass
Remote-band signal	133.41	82dBuA/m	No function loss	Pass
	147.39	82dBuA/m	No function loss	Pass





Appendix I: Photographs of Test Setup

Radiated Spurious Emissions Below 30MHz Test Setup



Radiated Spurious Emissions Below 1GHz Test Setup





Page 32 of 32

Appendix II: Photographs of Test EUT

Refer to the Report No.: AGC05443241219AP01

----End of Report----



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.



Health Test Report

Report No.: AGC05443241219EH01

PRODUCT DESIGNATION: Bamboo wireless charger

BRAND NAME : N/A

MODEL NAME : M06924

APPLICANT: MID OCEAN BRANDS B.V.

DATE OF ISSUE : Jan. 13, 2025

STANDARD(S) : EN IEC 62311:2020 EN 50665:2017

REPORT VERSION: V1.0

Attestation of Globat Confine (Shenzhen) Co., Ltd.



Page 2 of 13

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Jan. 13, 2025	Valid	Initial release



Page 3 of 13

TABLE OF CONTENTS

1. GENERAL INFORMATION	
2. TECHNICAL INFORMATION	
3. RF EXPOSURE MEASUREMENT	
3.1 INTRODUCTION	6
3.2 TEST LIMIT	······ 7
3.3 EVALUATION METHODS	
4. TEST EQUIPMENT LIST	9
5. EUT OPERATION CONDITION	9
6. TEST RESULT	10
7. CONCLUSION	10
APPENDIX I: PHOTOGRAPHS OF TEST SETUP	11



Page 4 of 13

1. GENERAL INFORMATION

Applicant	MID OCEAN BRANDS B.V.
Address	7/F. Kings Tower, 111 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong
Manufacturer	MID OCEAN BRANDS B.V.
Address	7/F. Kings Tower, 111 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong
Factory	MID OCEAN BRANDS B.V.
Address	7/F. Kings Tower, 111 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong
Product Designation	Bamboo wireless charger
Brand Name	N/A
Test Model	MO6924
Series Model	N/A
Difference Description	N/A
Date of receipt of test item	Dec. 23, 2024
Date of test	Dec. 23, 2024~Jan. 13, 2025
Test Result	Pass

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By	Bibo zhang		
	Bibo Zhang (Project Engineer)	Jan. 13, 2025	
Reviewed By	Calvin Lin		
	Calvin Liu (Reviewer)	Jan. 13, 2025	
Approved By	Angole li		
	Angela Li (Authorized Officer)	Jan. 13, 2025	



Page 5 of 13

2. TECHNICAL INFORMATION

Note: the following data is based on the information by the applicant.

Product Designation	Bamboo wireless charger			
Test Model	MO6924			
Hardware Version	V1.0			
Software Version	V1.0			
EUT Input Rating	DC 9V 2A; DC 9V 2.22A; DC 5V 2A			
Wireless Charging Output Power	5W, 7.5W, 10W,15W Max			
WPT Technical Parameters				
Operation Frequency Range	110kHz-205kHz			
Modulation Type	ASK			
Antenna Designation	Coil Antenna			
Antenna Gain	0dBi			

Note: For more details, please refer to the user's manual of the EUT.



Page 6 of 13

3. RF EXPOSURE MEASUREMENT

3.1 INTRODUCTION

This International Standard applies to electronic and electrical equipment for which no dedicated product- or product family standard regarding human exposure to electromagnetic fields applies.

This generic standard applies to electronic and electrical apparatus for which no dedicated product- or product family standard regarding human exposure to electromagnetic fields applies.

The frequency range covered is 0 Hz to 300 GHz.

The object of this generic standard is to provide assessment methods and criteria to evaluate such equipment against basic restrictions or reference levels on exposure of the general public related to electric, magnetic, electromagnetic fields and induced and contact current.

NOTE: This standard is intended to cover both intentional and non-intentional radiators. If the equipment complies with the requirements in another relevant standard, e.g. EN 62479 covering low power equipment, then the requirements of this standard (IEC 62311) are considered to be met and the application of this standard to that equipment is not necessary.



Page 7 of 13

3.2 TEST LIMIT

According to EN 62311:2008, Assessment of electronic and electrical equipment related to human exposure restrictions for electromagnetic fields (0 Hz - 300 GHz).

Annex F Measurement of E and H field

A commonly used probe size is 100 cm², also the contribution of the three axes X, Y and Z can be evaluated separately.

Reference levels for electric, magnetic and electromagnetic fields (0 Hz to 300 GHz, unperturbed rms values)

Frequency range	E-field strength (V/m)	H-field strength (A/m)	B-field (μΤ)	Equivalent plane wave power density S _{eq} (W/m²)
0-1 Hz	_	3,2 × 10 ⁴	4 × 10 ⁴	_
1-8 Hz	10 000	$3,2 \times 10^4/f^2$	$4 \times 10^4/f^2$	1 <u></u>
8-25 Hz	10 000	4 000/f	5 000/f	-
0,025-0,8 kHz	250/f	4/f	5/f	_
0,8-3 kHz	250/f	5	6,25	_
3-150 kHz	87	5	6,25	9 <u></u>
0,15-1 MHz	87	0,73/f	0,92/f	
1-10 MHz	87/f ^{1/2}	0,73/f	0,92/f	_
10-400 MHz	28	0,073	0,092	2
400-2 000 MHz	1,375 f ^{1/2}	0,0037 f ^{1/2}	0,0046 f ^{1/2}	f/200
2-300 GHz	61	0,16	0,20	10




Page 8 of 13

3.3 EVALUATION METHODS

Measurement of E and H field

A commonly used probe size is 100 cm², also the contribution of the three axes X, Y and Z can be evaluated separately.

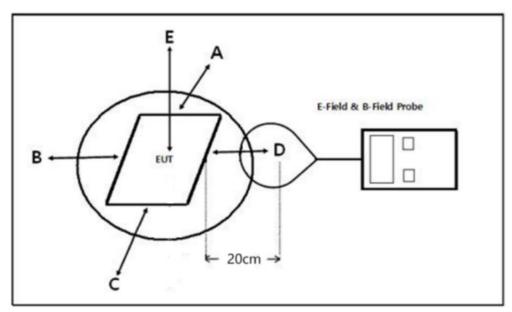

Note: Position A: Front of EUT; Position B: Left of EUT; Position C: back of EUT; Position D: Right of EUT; Position E: Top of EUT

Based on the above standard limit, any device with output power below 5A/m cannot produce an exposure exceeding this restriction under the most pessimistic exposure conditions.



Page 9 of 13

4. TEST EQUIPMENT LIST

Description	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Broadband Field Meter	WAVECONTROL	SMP2	19SN1101	Feb. 24, 2023	Feb. 23, 2025
Probe FHP	WAVECONTROL	WP400	19WP100558	Feb. 24, 2023	Feb. 23, 2025

5. EUT OPERATION CONDITION

No.	Test Mode Description
1	AC/DC Adapter + EUT + Wireless load (15W)
2	AC/DC Adapter + EUT + Wireless load (10W)
3	AC/DC Adapter + EUT + Wireless load (7.5W)
4	AC/DC Adapter + EUT + Wireless load (5W)
5	AC/DC Adapter + EUT (Null load)

Note: 1. All modes have been tested and only the worst mode test data recorded in the test report.



Page 10 of 13

6. TEST RESULT

Frequency	Maximum Radiated H-Field at 20cm		Limit	Result
MHz	A/m		A/m	Pass/Fail
140.4kHz	position E	0.065	5	Pass
	position A	0.058		
	position B	0.039		
	position C	0.042		
	position D	0.037		

Since Radiated H-Field at worse case is 0.065A/m which cannot exceed the exempt condition, 5A/m. It is deemed to full fit the requirement of RF exposure basic restriction specified in EC Council Recommendation (1999/519/EC).

7. CONCLUSION


Remark: EUT meets the basic requirements in the standard.



Page 11 of 13

APPENDIX I: PHOTOGRAPHS OF TEST SETUP



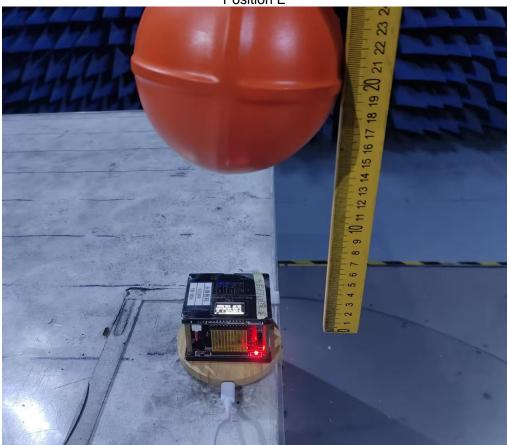

Position A



Any report having not be Stamp" is deemed to presented in the report Further enquiry of validity

Attestation of Global Compliance(Shenzhen)Co., Ltd


Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd


Tel: +86-755 2523 4088 E-mail: agc@agccert.com

Web: http://www.agccert.com/




Page 12 of 13

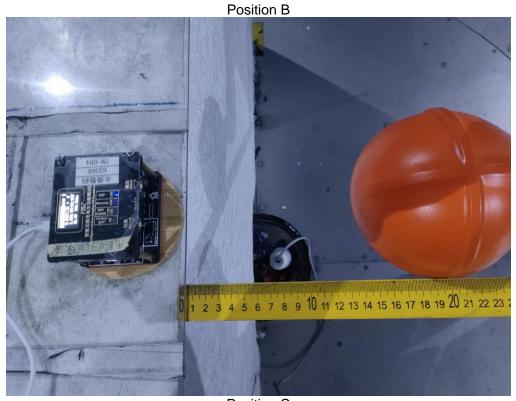

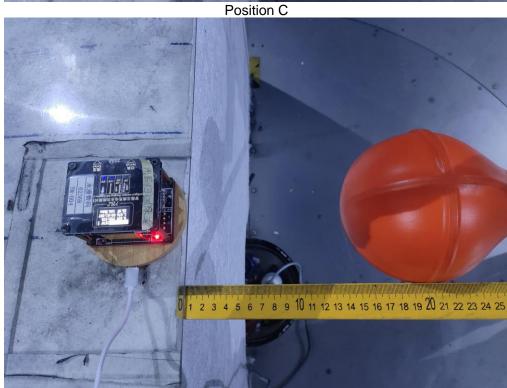



Page 13 of 13

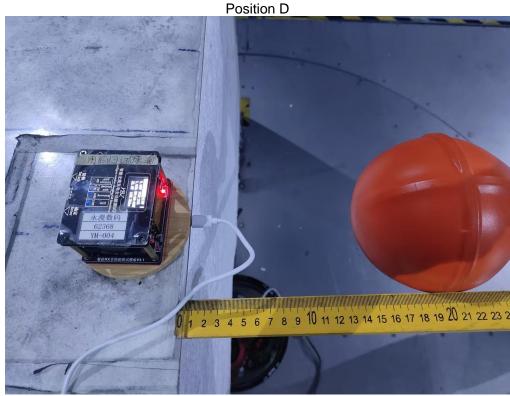

----END OF REPORT----



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.