



中国认可
国际互认
检测
TESTING
CNAS L6478



TEST REPORT

Reference No. : WTF23F04080392E
Applicant : Mid Ocean Brands B.V.
Address : 7/F., Kings Tower, 111 King Lam Street, Cheung Sha Wan, Kowloon,
Hong Kong
Manufacturer : 111441
Address : ---
Product Name : Electric bottle opener
Model No. : MO7369
Test specification : EN IEC 55014-1:2021
EN IEC 55014-2:2021
Date of Receipt sample : 2023-04-19
Date of Test : 2023-04-19 to 2023-04-20
Date of Issue : 2023-04-23
Test Report Form No. : WEH-55014A-03B
Test Result : Pass

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:

Waltek Testing Group (Foshan) Co., Ltd.

Address: No.13-19, 2/F., 2nd Building, Sunlink International Machinery City,
Chencun, Shunde District, Foshan, Guangdong, China

Tel:+86-757-23811398

Fax:+86-757-23811381

E-mail:info@waltek.com.cn

Tested by:

Leo Feng

Leo Feng

Approved by:

Danny Zhou

Danny Zhou



1 Test Summary

EMISSION				
Test Item	Test Standard		Class / Severity	Result
Radiated Emission, 30MHz to 1000MHz	EN IEC 55014-1:2021		Clause 4.3.4.5	Pass
IMMUNITY (EN IEC 55014-2:2021)				
Test Item	Test Method	Class / Severity	Performance Criteria	Result
Electrostatic Discharge(ESD)	IEC 61000-4-2:2008	±4 kV Contact ±8 kV Air	B	Pass
Radio-Frequency Electromagnetic Fields (80MHz to 1GHz)	IEC 61000-4-3:2006+A1:2007+A2:2010	3V/m, 80%, 1kHz, Amp. Mod.	A	Pass

Remark:

Pass Test item meets the requirement
Fail Test item does not meet the requirement
N/A Test case does not apply to the test object
A.M Amplitude Modulation

WALTEK



2 Contents

	Page
COVER PAGE	1
1 TEST SUMMARY	2
2 CONTENTS	3
3 GENERAL INFORMATION.....	4
3.1 GENERAL DESCRIPTION OF E.U.T.	4
3.2 DETAILS OF E.U.T.	4
3.3 DESCRIPTION OF SUPPORT UNITS	4
3.4 STANDARDS APPLICABLE FOR TESTING	4
3.5 TEST FACILITY.....	5
3.6 SUBCONTRACTED.....	5
3.7 ABNORMALITIES FROM STANDARD CONDITIONS.....	5
4 EQUIPMENT USED DURING TEST	6
4.1 SOFTWARE LIST	7
4.2 MEASUREMENT UNCERTAINTY	7
4.3 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT.....	7
4.4 DECISION RULE.....	7
5 EMISSION TEST RESULTS.....	8
5.1 RADIATED EMISSION, 30MHZ TO 1GHZ	8
5.1.1 E.U.T. Operation	8
5.1.2 Block Diagram of Test Setup	8
5.1.3 Measurement Data	8
5.1.4 Corrected Amplitude & Margin Calculation	9
5.1.5 Radiated Emission Test Data.....	9
6 IMMUNITY TEST RESULTS.....	11
6.1 PERFORMANCE CRITERIA	11
6.2 ELECTROSTATIC DISCHARGE (ESD).....	12
6.2.1 E.U.T. Operation	12
6.2.2 Block Diagram of Setup	12
6.2.3 Direct Discharge Test Results	13
6.2.4 Indirect Discharge Test Results.....	13
6.3 RADIO-FREQUENCY ELECTROMAGNETIC FIELDS, 80MHZ TO 1GHZ.....	14
6.3.1 E.U.T. Operation	14
6.3.2 Block Diagram of Setup	14
6.3.3 Test Results.....	15
7 PHOTOGRAPHS – TEST SETUP	16
7.1 PHOTOGRAPH – RADIATED EMISSION TEST SETUP.....	16
7.2 PHOTOGRAPH – ESD IMMUNITY TEST SETUP	16
7.3 PHOTOGRAPH – RADIO-FREQUENCY ELECTROMAGNETIC FIELDS IMMUNITY TEST SETUP	17
8 PHOTOGRAPHS – CONSTRUCTIONAL DETAILS	18
8.1 EUT – EXTERNAL VIEW	18
8.2 EUT – INTERNAL VIEW	18



3 General Information

3.1 General Description of E.U.T.

Product Name : Electric bottle opener

Model No. : MO7369

Remark : ---

3.2 Details of E.U.T.

Technical Data : Battery 6V

3.3 Description of Support Units

The EUT has been tested as an independent unit. MO7369 is the test sample. All tests were performed in the condition of Battery 6V input.

3.4 Standards Applicable for Testing

The tests were performed according to following standards:

EN IEC 55014-1:2021 Electromagnetic compatibility - Requirements for household appliances, electric tools and similar apparatus - Part 1: Emission

EN IEC 55014-2:2021 Electromagnetic compatibility - Requirements for household appliances, electric tools and similar apparatus - Part 2: Immunity Product Family Standard



3.5 Test Facility

The test facility has a test site registered with the following organizations:

- **ISED – Registration No.: 21895**

Waltek Testing Group (Foshan) Co., Ltd. has been registered and fully described in a report filed with the Innovation, Science and Economic Development Canada (ISED). The acceptance letter from the ISED is maintained in our files. Registration ISED number: 21895, March 12, 2019

- **FCC – Registration No.: 820106**

Waltek Testing Group (Foshan) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 820106, August 16, 2018

- **NVLAP – Lab Code: 600191-0**

Waltek Testing Group (Foshan) Co., Ltd. EMC Laboratory is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 600191-0.

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

3.6 Subcontracted

Whether parts of tests for the product have been subcontracted to other labs:

☐ Yes ☒ No

If Yes, list the related test items and lab information:

Test items: ---

Lab information: ---

3.7 Abnormalities from Standard Conditions

None.



4 Equipment Used during Test

☒ Radiated Emission (30MHz to 1GHz) 1#					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	3m Semi-anechoic Chamber	CHANGCHUANG	9m×6m×6m	---	Valid
2.	EMI Test Receiver	R&S	ESR7	101566	Valid
3.	Trilog Broadband Antenna	SCHWARZBECK	VULB 9162	9162-117	Valid
4.	Coaxial Cable (below 1GHz)	HUBER+SUHNER	CBL3-NN-12+3m	214NN320	Valid
☐ Radiated Emission (30MHz to 1GHz) 2#					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	3m Semi-anechoic Chamber	YIHENG	10m×5.3m×3.5m	YH2021071804	Valid
2.	EMI Test Receiver	R&S	ESR7	102454	Valid
3.	Trilog Broadband Antenna	SCHWARZBECK	VULB 9163	01418	Valid
4.	Coaxial Cable (below 1GHz)	YIHENG	LMR240UF-NMSM-7.5	---	Valid
☒ ESD					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	ESD Simulator	TESEQ	NSG437	521	Valid
☒ Radio-frequency Electromagnetic Fields					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	RF Power Amplifier	OPHIR	5225R	1051/1712	Valid
2.	RF Power Amplifier	OPHIR	5293RE	1051/171	Valid
3.	Stacked double logarithmic periodic antenna	SCHWARZBECK	STLP9128E-SPECIAL	142	Valid
4.	Stacked double logarithmic periodic antenna	SCHWARZBECK	STLP 9149	476	Valid
5.	RF signal generator	Agilent	N5181A	MY48180720	Valid
6.	Power meter	RS	NRP6A	101133	Valid
7.	Power meter	RS	NRP6A	101134	Valid

☐: Not Used

☒: Used



4.1 Software List

Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission 1#)	FARATRONIC	EZ-EMC	RA-03A1-1
EMI Test Software (Radiated Emission 2#)	FARATRONIC	EZ-EMC	RA-03A1-1
Radiated Immunity Test Software	TONSCEND	JS35-RS	V2.0.1.7

4.2 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Radiated Emission	30MHz~1GHz	±4.5dB	(1)
Radiated Emission	1GHz~6GHz	±4.5dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

4.3 Special Accessories and Auxiliary Equipment

Item	Equipment	Technical Data	Manufacturer	Model No.	Serial No.
1.	/	/	/	/	/

4.4 Decision Rule

Compliance or non-compliance with a disturbance limit shall be determined in the following manner.

If U_{LAB} is less than or equal to U_{cispr} , then

- Compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- Non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{LAB} is greater than U_{cispr} , then

- Compliance is deemed to occur if no measured disturbance level, increased by $(U_{LAB} - U_{cispr})$, exceeds the disturbance limit;
- Non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{LAB} - U_{cispr})$, exceeds the disturbance limit.



5 Emission Test Results

5.1 Radiated Emission, 30MHz to 1GHz

Test Requirement : EN IEC 55014-1 Clause 4.3.4.5

Test Method : EN IEC 55014-1 Clause 5.3.4

Test Result : Pass

Frequency Range : 30MHz to 1GHz

Class/Severity : Table 9 of EN IEC 55014-1

5.1.1 E.U.T. Operation

Operating Environment:

Temperature : 22.9°C

Humidity : 52.6%RH

Atmospheric Pressure : 101.1kPa


EUT Operation:

Input Voltage : Battery 6V

Operating Mode : Working mode

5.1.2 Block Diagram of Test Setup

The Radiated Emission test was performed in the 3m Semi- Anechoic Chamber test site and accordance with CISPR16-2-3.

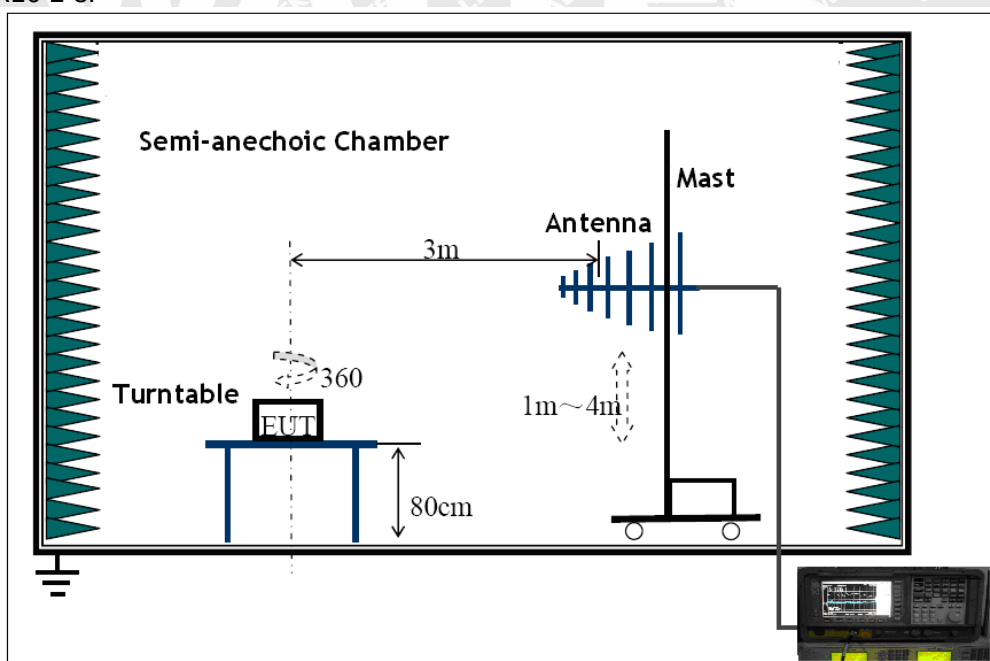

5.1.3 Measurement Data

The maximised peak emissions from the EUT was scanned and measured for Horizontal & Vertical polarisation. Quasi-peak measurements were performed if peak emissions were within 6dB of the limit line.



5.1.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Corr. Factor}$$


$$\text{Corr. Factor} = \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$


The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

5.1.5 Radiated Emission Test Data

Vertical Polarization:

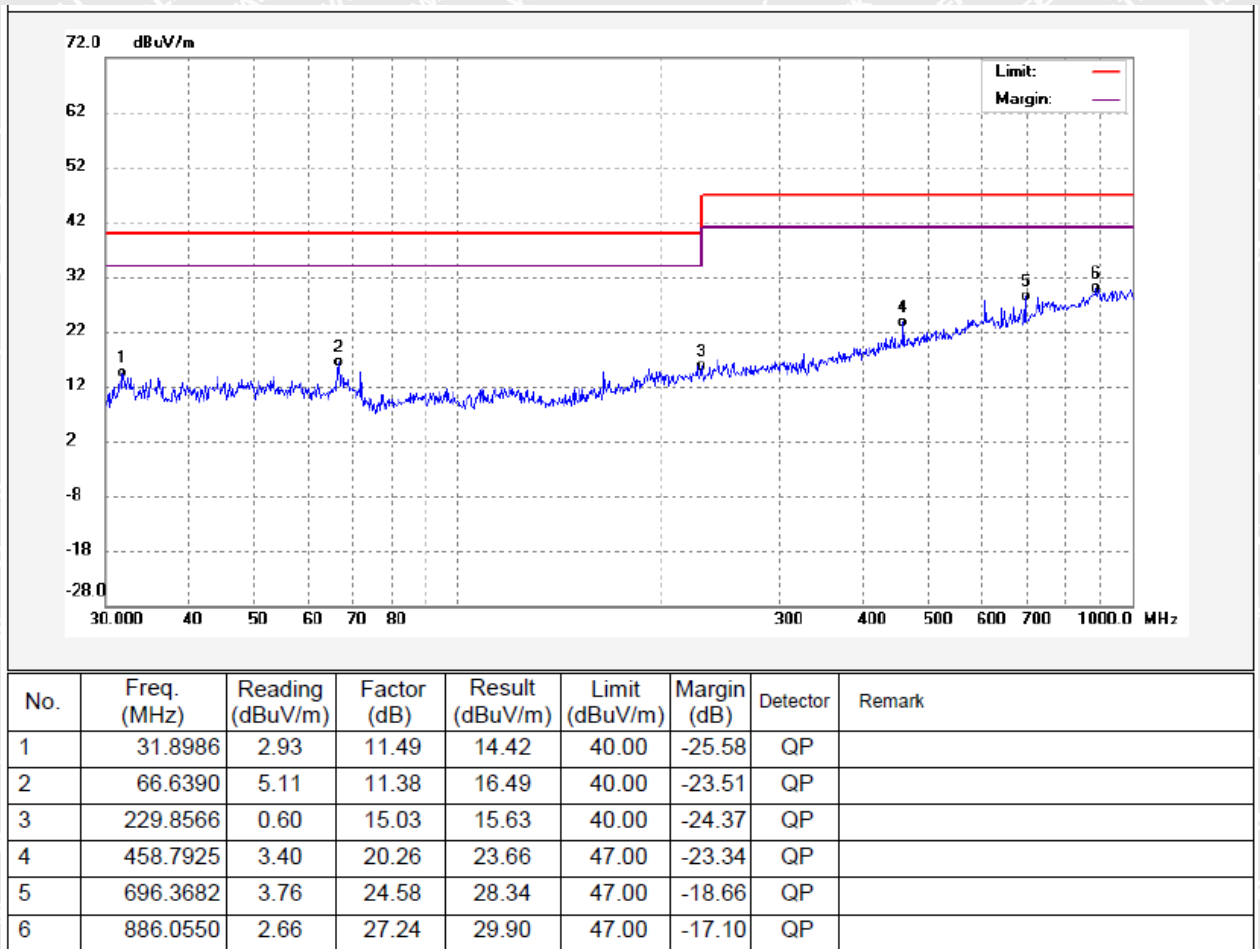

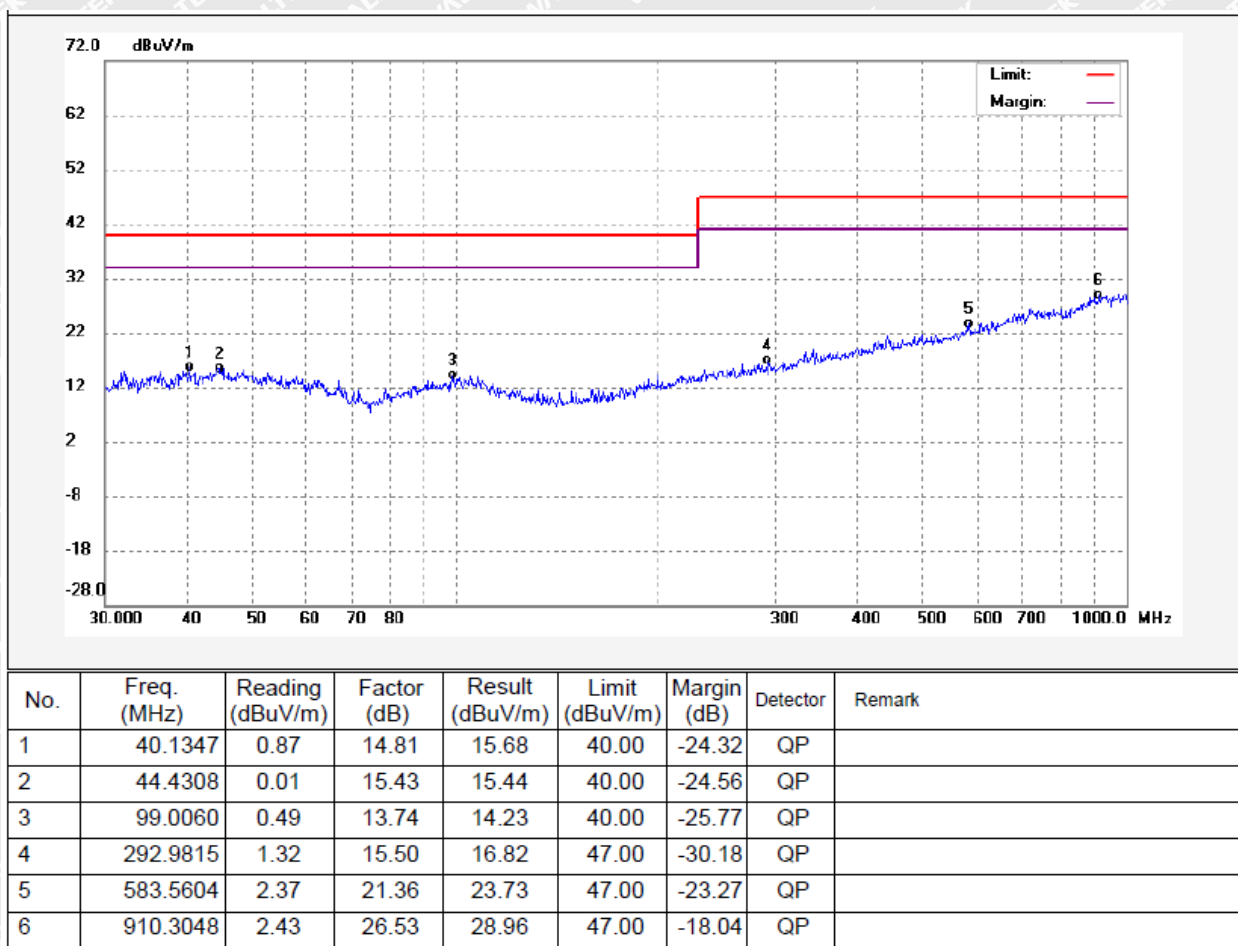**Horizontal Polarization:**



6 Immunity Test Results

6.1 Performance Criteria

Performance criterion A: The apparatus shall continue to operate as intended during the test. No degradation of performance or loss of function is allowed below a performance level (or permissible loss of performance) specified by the manufacturer, when the apparatus is used as intended. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and from what the user may reasonably expect from the apparatus if used as intended.

Performance criterion B: The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level (or permissible loss of performance) specified by the manufacturer, when the apparatus is used as intended. During the test, degradation of performance is allowed, however, no change of actual operating state or stored data is allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and from what the user may reasonably expect from the apparatus if used as intended.

Performance criterion C: Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls, or by any operation specified in the instructions for use.

For further details, please refer to EN IEC 55014-2.

WALTEK



6.2 Electrostatic Discharge (ESD)

Test Requirement	: EN IEC 55014-2 Clause 5.1
Test Method	: IEC 61000-4-2
Test Result	: Pass
Discharge Impedance	: 330Ω / 150pF
Discharge Voltage	: Air Discharge: ±8kV Contact Discharge: ±4kV HCP & VCP: ±4kV
Polarity	: Positive & Negative
Number of Discharge	: Minimum 10 times at each test point
Discharge Mode	: Single Discharge
Discharge Period	: 1 second minimum

6.2.1 E.U.T. Operation

Operating Environment:


Temperature	: 21.7°C
Humidity	: 52.6%RH
Barometric Pressure	: 101.2kPa

EUT Operation:

Input Voltage	: Battery 6V
Operating Mode	: On mode

6.2.2 Block Diagram of Setup

The ESD test was performed in accordance with the IEC 61000-4-2.

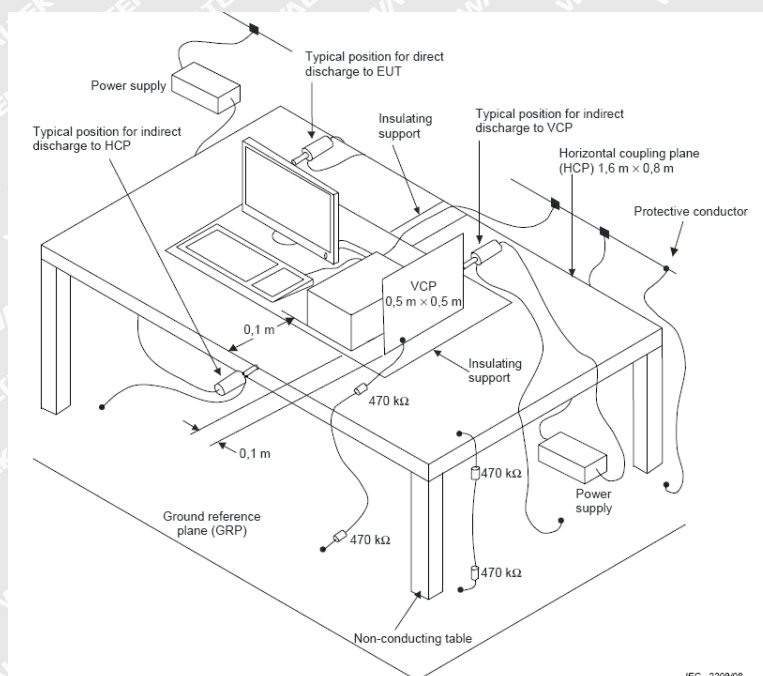



6.2.3 Direct Discharge Test Results

Observations:

Test points:

1. All Exposed Surface & Seams;
2. All metallic part

Direct Discharge			Test Results	
Applied Voltage (kV)	Performance Criterion	Test Point	Contact Discharge	Air Discharge
±8	B	1	N/A	Pass*
±4	B	2	Pass*	N/A

Remark:

- * During the test no deviation was detected to the selected operation mode(s)

6.2.4 Indirect Discharge Test Results

Observations:

Test points:

1. All sides.

Indirect Discharge			Test Results	
Applied Voltage (kV)	Performance Criterion	Test Point	Horizontal Coupling	Vertical Coupling
±4	B	1	Pass*	Pass*

Remark:

- * During the test no deviation was detected to the selected operation mode(s)



6.3 Radio-Frequency Electromagnetic Fields, 80MHz to 1GHz

Test Requirement	: EN IEC 55014-2 Clause 5.5
Test Method	: IEC 61000-4-3
Test Result	: Pass
Frequency Range	: 80MHz to 1GHz
Test level	: 3V/m
Modulation	: 80%, 1kHz Amplitude Modulation.
Face of EUT	: Front, Back, Left, Right
Antenna polarisation	: Horizontal & Vertical
Test Distance	: 3m

6.3.1E.U.T. Operation

Operating Environment:


Temperature	: 22.9°C
Humidity	: 52.6% RH
Barometric Pressure	: 101.3kPa

EUT Operation:

Input Voltage	: Battery 6V
Operating Mode	: On mode

6.3.2 Block Diagram of Setup

The Radio-frequency electromagnetic fields Immunity test was performed in accordance with the IEC 61000-4-3.

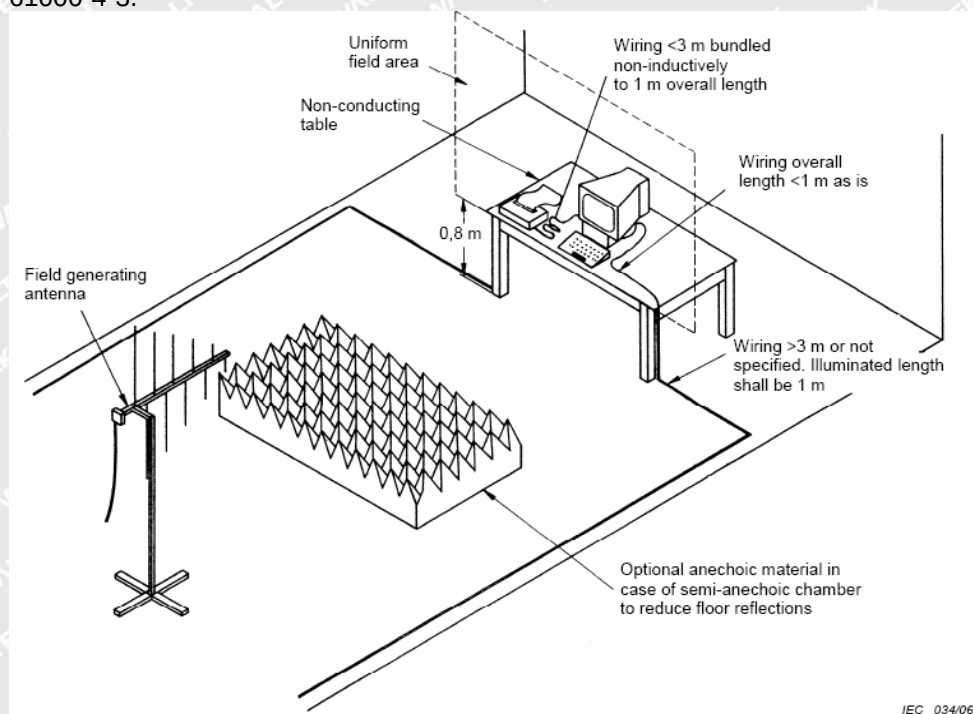



6.3.3Test Results

Frequency	Face of EUT	Antenna polarisation	Test Level	Step Size	Dwell Time	Performance Criterion	Result
80 to 1000MHz	Front, Back, Left, Right	Horizontal	3V/m	1%	1s	A	Pass*
80 to 1000MHz	Front, Back, Left, Right	Vertical	3V/m	1%	1s	A	Pass*

Remark:


* During the test no deviation was detected to the selected operation mode(s)

WALTEK




7 Photographs – Test Setup

7.1 Photograph – Radiated Emission Test Setup

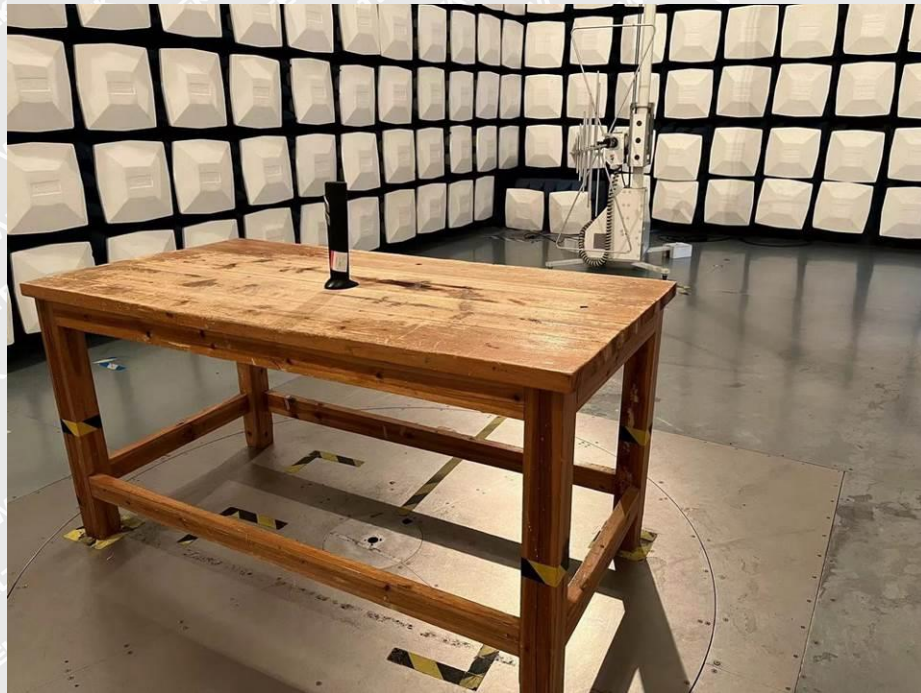


7.2 Photograph – ESD Immunity Test Setup

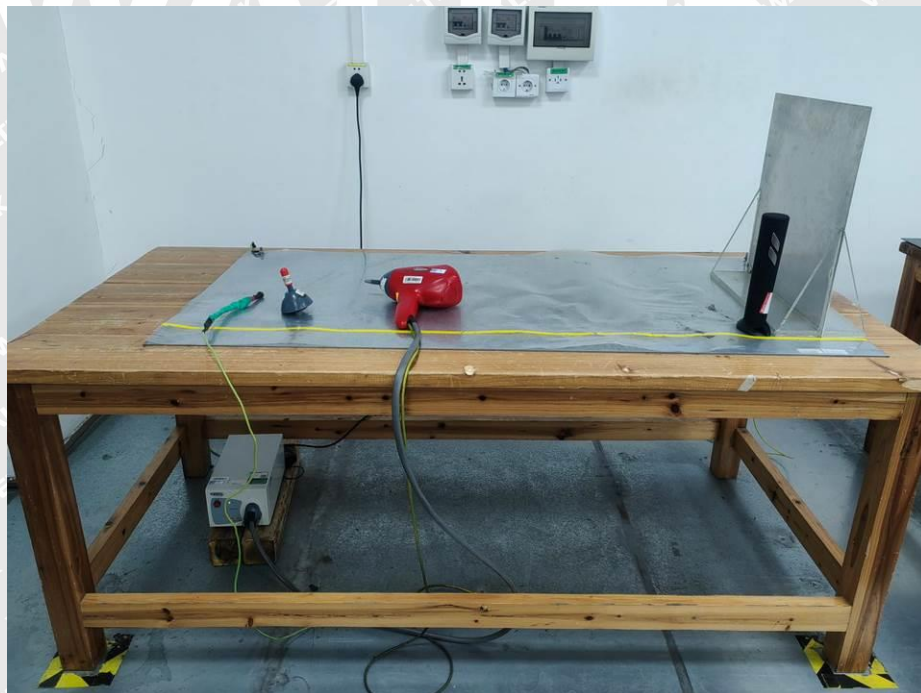



7.3 Photograph – Radio-Frequency Electromagnetic Fields Immunity Test Setup

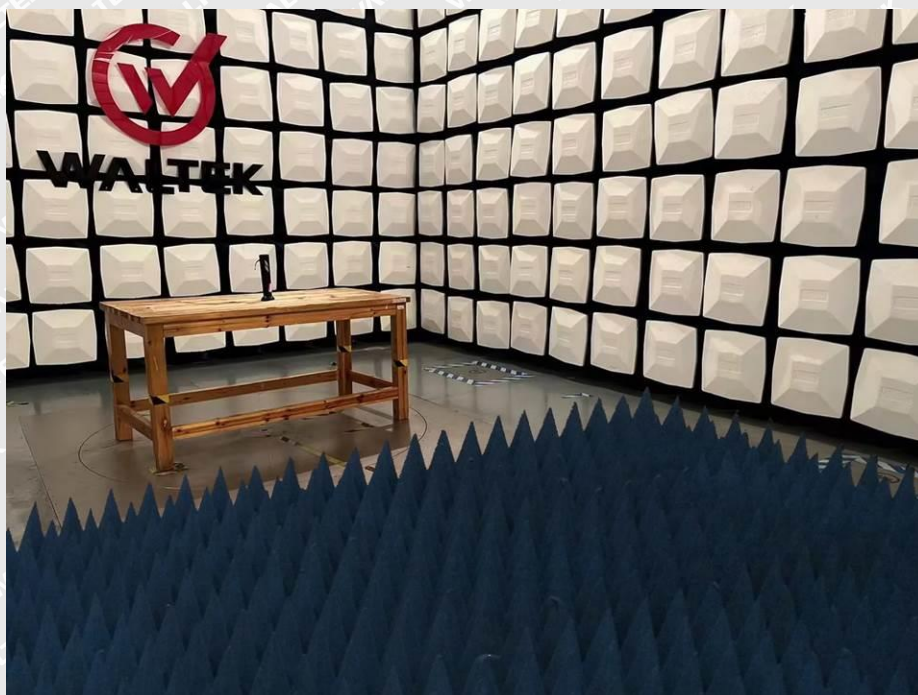

WALTEK





8 Photographs – Constructional Details

8.1 EUT – External View



8.2 EUT – Internal View

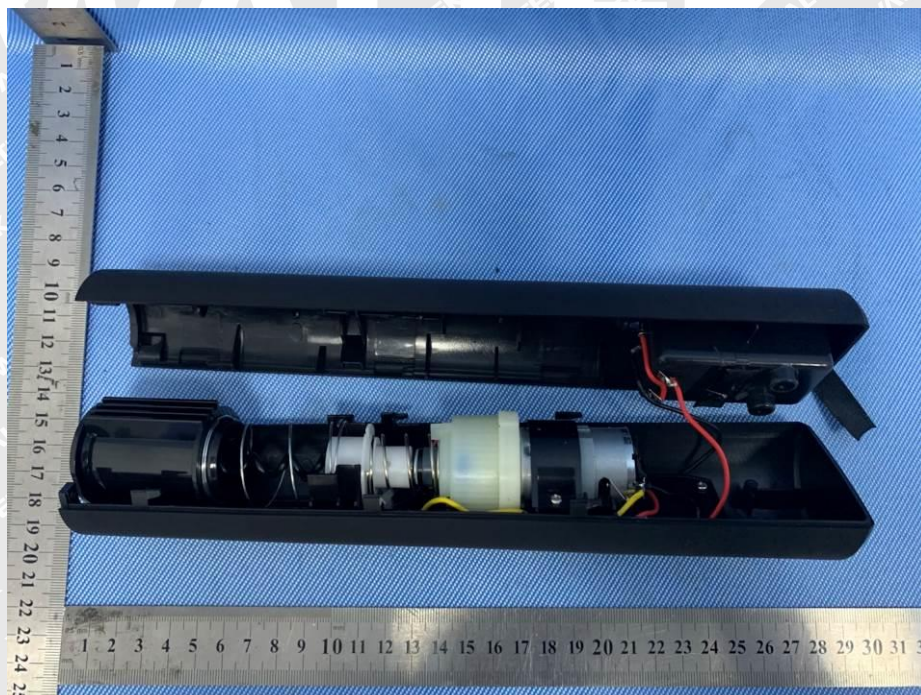

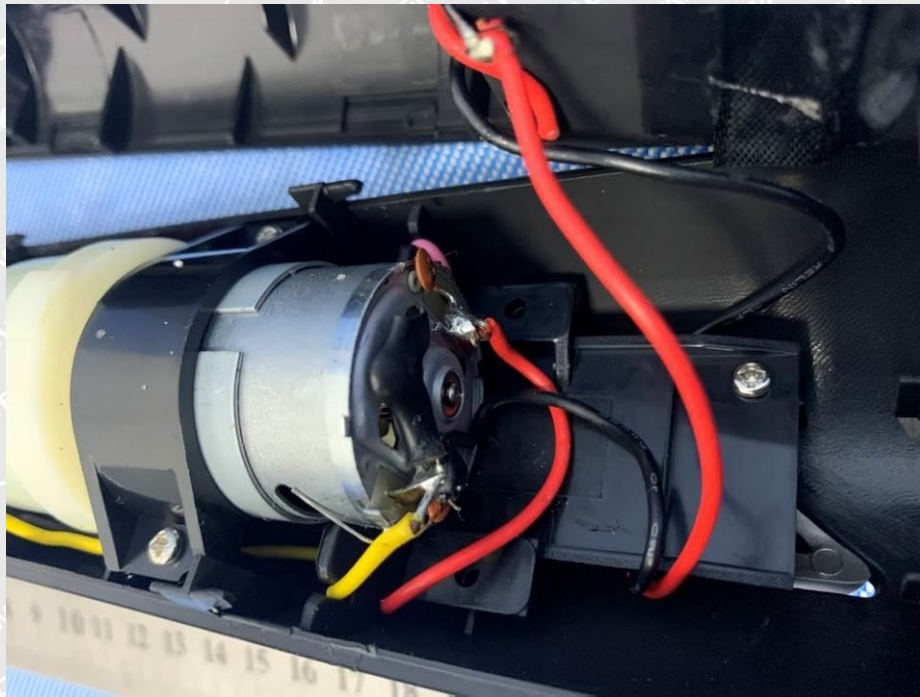

===== End of Report =====

WALTEK