



# TEST REPORT

Report No.: AZT24031812C-E1

Date of issue: March 22, 2024



中国认可  
国际互认  
检测  
TESTING  
CNAS L10844

Page 1 of 7

**Applicant** :  
**Address** :  
**Manufacturer** :  
**Address** :

Report on the submitted samples said to be:

Sample Name : Li-ion Polymer Battery  
Tested model : 802025  
Series models : Please refer to next page(s).  
Date of Sample Received : March 18, 2024  
Testing Period : March 18, 2024 ~ March 22, 2024  
Results : Please refer to next page(s).

## TEST REQUEST

Regulation (EU) 2023/1542 amending Directive 2008/98/EC and Regulation (EU)  
2019/1020 - Lead, Cadmium & Mercury content

## Conclusion

Pass

Signed for and on behalf of AZT



Jack Zhong



Shenzhen AZT Technology Co., Ltd.

No.502, Building 1, Yibaolai Industrial City, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China  
Tel: 0755-23501189; E-mail: azt-ep@azt-tech.com; Http: www.azt-tech.com



# TEST REPORT

Report No.: AZT24031812C-E1

Date of issue: March 22, 2024

Page 2 of 7

## Series models:

No.	Model	Capacity mAh	Voltage V	Wh
1	702032	300	3.7	1.11
2	651723	150	3.7	0.555
3	802035	400	3.7	1.48
4	702035	350	3.7	1.295
5	651419	100	3.7	0.37
6	802025	220	3.7	0.814
7	802540	600	3.7	2.22
8	801855	700	3.7	2.59
9	952540	800	3.7	2.96
10	651522	135	3.7	0.4995
11	702025	220	3.7	0.814
12	102538	700	3.7	2.59
13	502030	250	3.7	0.925
14	952951	1200	3.7	4.44
15	902035	500	3.7	1.85
16	102560	1200	3.7	4.44
17	882825	430	3.7	1.591
18	802525	300	3.7	1.11
19	801723	210	3.7	0.777
20	501419	75	3.7	0.2775
21	702045	650	3.7	2.405
22	501447	280	3.7	1.036
23	952245	1000	3.7	3.7
24	122646	1300	3.7	4.81
25	903636	1300	3.7	4.81
26	741724	180	3.7	0.666
27	752555	680	3.7	2.516
28	802035	400	3.7	1.48
29	912026	300	3.7	1.11
30	403560	1000	3.7	3.7
31	401430	100	3.7	0.37
32	402035	250	3.7	0.925
33	802540	600	3.7	2.22



Shenzhen AZT Technology Co., Ltd.

No.502, Building 1, Yibaolai Industrial City, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China  
Tel: 0755-23501189; E-mail: azt-ep@azt-tech.com; Http: www.azt-tech.com



# TEST REPORT

Report No.: AZT24031812C-E1

Date of issue: March 22, 2024

Page 3 of 7

No.	Model	Capacity mAh	Voltage V	Wh
34	602020	180	3.7	0.666
35	105080	5000	3.7	18.5
36	626190	4500	3.7	16.65
37	502060	530	3.7	1.961
38	421920	120	3.7	0.444
39	721855	500	3.7	1.85
40	351745	260	3.7	0.962
41	401225	90	3.7	0.333
42	902025	280	3.7	1.036
43	621243	200	3.7	0.74
44	802033	400	3.7	1.48
45	114068	4000	3.7	14.8
46	602025	180	3.7	0.666
47	302025	100	3.7	0.37
48	351746	260	3.7	0.962
49	401020	55	3.7	0.2035
50	553442	800	3.7	2.96
51	684941	1600	3.7	5.92
52	854750	5000	3.7	18.5
53	603035	600	3.7	2.22
54	606090	8000	3.7	29.6
55	602025	185	3.7	0.6845
56	601845	450	3.7	1.665
57	881820	180	3.7	0.666
58	932446	1800	3.7	6.66
59	402020	110	3.7	0.407
60	802025	260	3.7	0.962
61	852550	1800	3.7	6.66
62	751732	280	3.7	1.036
63	851724	220	3.7	0.814
64	802540	600	3.7	2.22
65	103450	1200	3.7	4.44
66	4063185	3700	3.7	13.69



Shenzhen AZT Technology Co., Ltd.

No.502, Building 1, Yibaolai Industrial City, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China  
Tel: 0755-23501189; E-mail: azt-ep@azt-tech.com; Http: www.azt-tech.com



# TEST REPORT

Report No.: AZT24031812C-E1

Date of issue: March 22, 2024

Page 4 of 7

No.	Model	Capacity mAh	Voltage V	Wh
67	703040	800	3.7	2.96
68	103048	1500	3.7	5.55
69	621250	280	3.7	1.036
70	701333	220	3.7	0.814
71	453442	650	3.7	2.405
72	501220	80	3.7	0.296
73	302050	260	3.7	0.962
74	501522	130	3.7	0.481
75	752035	500	3.7	1.85
76	501447	300	3.7	1.11
77	701419	100	3.7	0.37
78	502248	500	3.7	1.85
79	801525	180	3.7	0.666
80	802132	400	3.7	1.48
81	902540	800	3.7	2.96
82	442626	340	3.7	1.258
83	523450	1000	3.7	3.7
84	102560	1200	3.7	4.44
85	702024	220	3.7	0.814
86	741724	170	3.7	0.629
87	801724	210	3.7	0.777
88	102538	650	3.7	2.405
89	802542	600	3.7	2.22
90	902035	550	3.7	2.035
91	402020	120	3.7	0.444
92	901535	360	3.7	1.332
93	7095105	8000	3.7	29.6
94	832560	2500	3.7	9.25
95	821855	610	3.7	2.257



Shenzhen AZT Technology Co., Ltd.

No.502, Building 1, Yibaolai Industrial City, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China  
Tel: 0755-23501189; E-mail: azt-ep@azt-tech.com; Http: www.azt-tech.com



# TEST REPORT

Report No.: AZT24031812C-E1

Date of issue: March 22, 2024

Page 5 of 7

## Tested part(s):

(1) Li-ion Polymer Battery

## **Results:**

### **A.1. Regulation (EU) 2023/1542 amending Directive 2008/98/EC and Regulation (EU) 2019/1020 - Lead, Cadmium & Mercury content**

**Test Method:** With reference to IEC 62321-5:2013 & IEC 62321-4:2013+AMD1:2017 CSV, analysis was performed by Inductively Coupled Plasma-Optical Emission Spectrometer (ICP-OES).

Test Items	Unit	Results	MDL	Limit
		1		
Lead (Pb)	%	N.D.	0.0005	0.01*
Mercury (Hg)	%	N.D.	0.0005	0.0005
Cadmium(Cd)	%	N.D.	0.0005	0.002

## **Remark:**

### **Battery label requirements:**

- General information of batteries:** The information on all battery labels should include ten items: manufacturer information, battery type and identification information, manufacturing address, production date (month and year), weight, capacity, chemical composition, harmful substances present in the battery (excluding mercury, cadmium or lead), available fire extinguishing agents, and key raw materials;
- Capacity information labels:** Rechargeable portable batteries, LMT batteries, and SLI batteries should have labels containing their capacity information;
- Separate collection symbol:** All batteries should be marked with a cross marked wheeled trash can symbol. In addition, batteries with cadmium content exceeding 0.002% or lead content exceeding 0.004% should have corresponding chemical element symbols added to the trash can label; The relevant chemical symbols indicating the content of heavy metals should be printed below the separately collected symbols and cover at least a quarter of the area of the symbol;
- QR code:** All batteries should be labeled with a QR code;
- CE Mark and EU Declaration of Conformity:** Batteries should be labeled with a CE mark before being placed on the market, and an EU Declaration of Conformity should be drafted.

## **Note:**

- \*=1. From 18 August 2024, portable batteries, whether or not incorporated into appliances, shall not contain more than 0,01 % of lead (expressed as lead metal) by weight.
- 2. The restriction set out in point 1 shall not apply to portable zinc-air button cells until 18 August 2028.
- N.D. = Not Detected or less than MDL
- MDL = Method Detection Limit
- mg/kg = milligram per kilogram = ppm
- % = percentage by weight, 0.0001% = 1 mg/kg
- Results shown are of total weight of the battery sample.
- Flow chart is included
- Photo appendix is included




Shenzhen AZT Technology Co., Ltd.

No.502, Building 1, Yibaolai Industrial City, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China  
Tel: 0755-23501189; E-mail: azt-ep@azt-tech.com; Http: www.azt-tech.com

## Appendix

### Lead /Cadmium/Mercury Testing Flow Chart

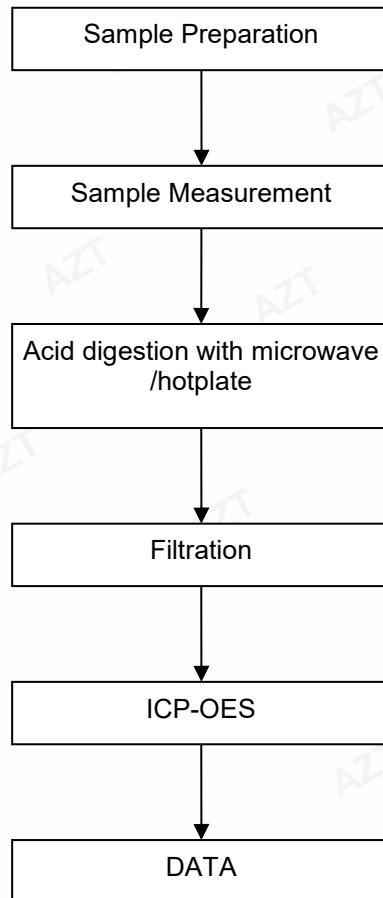


# TEST REPORT

Report No.: AZT24031812C-E1

Date of issue: March 22, 2024

Page 7 of 7

## The photo of the sample

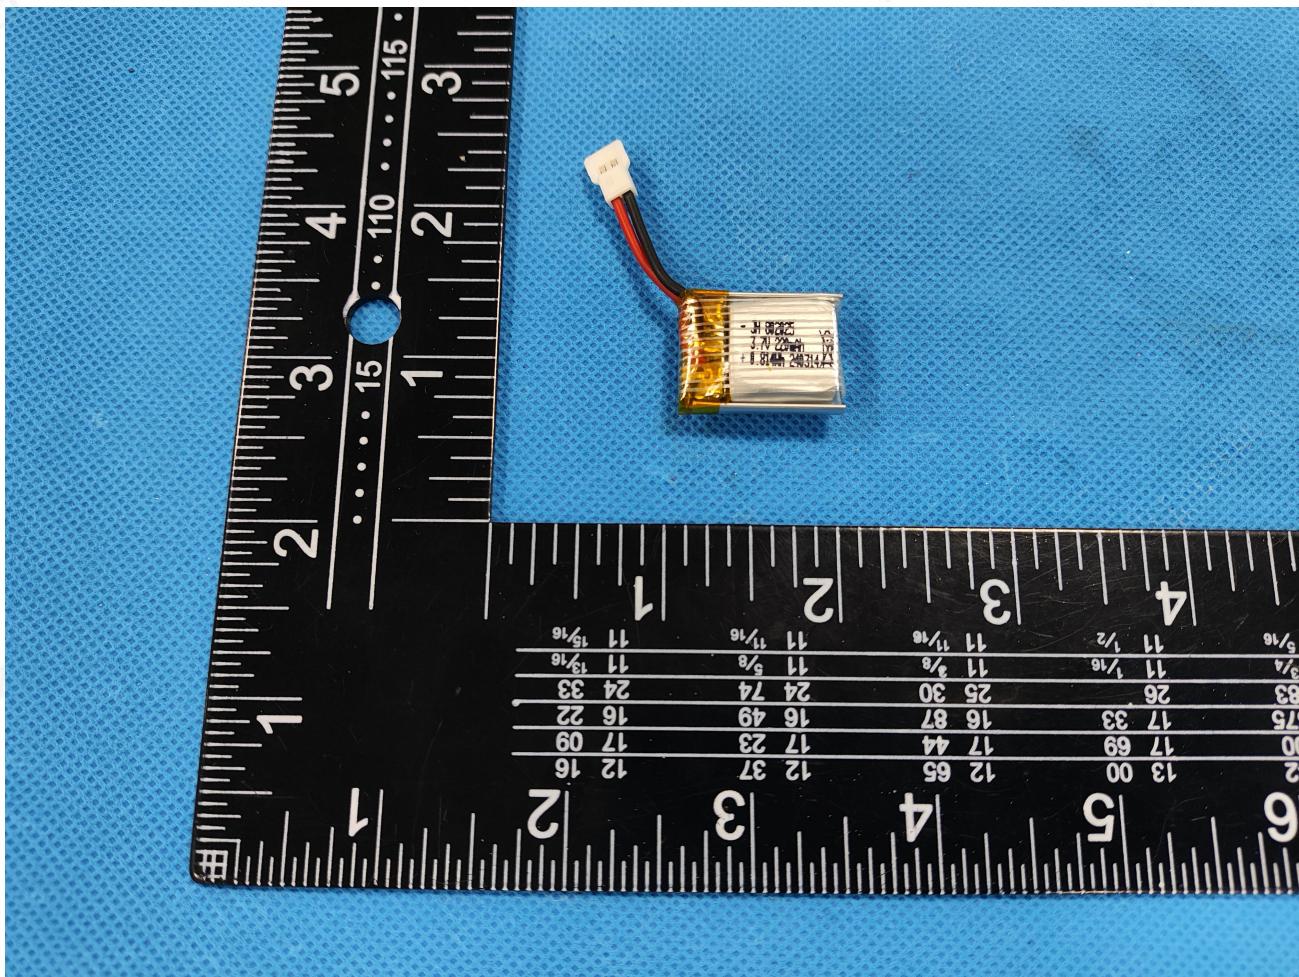

AZT authenticate the photo on original report only

Declaration: Report AZT24031812C-E0 was repealed and replaced by Report AZT24031812C-E1.

\*\*\*\*\* End of Report \*\*\*\*\*

### Statement:

1. The test report is considered invalidated without approval signature, special seal on the perforation.
2. The result(s) shown in this report refer only to the sample(s) tested.
3. Without written approval of AZT, this report can't be reproduced except in full.
4. The sample(s) and sample information was/were provided by the client who should be responsible for the authenticity which AZT hasn't verified.
5. In case of any discrepancy between the English version and Chinese version of the testing reports(if generated), the Chinese version shall prevail.
6. The test report is only for customer research, teaching, internal quality control, product development and other purposes, for reference only.



Shenzhen AZT Technology Co., Ltd.

No.502, Building 1, Yibaolai Industrial City, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China  
Tel: 0755-23501189; E-mail: azt-ep@azt-tech.com; Http: www.azt-tech.com



中国认可  
国际互认  
检测  
TESTING  
CNAS L11969

# IEC 62133-2 TEST REPORT

For  
Li-ion Polymer Battery  
Model: 702032

Prepared for:

NRCC (Shenzhen) Safety Technology Co., Ltd.  
(Testing and Inspection Body affiliated to the National Registration Center for  
Chemicals, MEM)  
Building A, No.2, Tengfeng 5th Road, Fuyong, Bao'an District, Shenzhen  
TEL: +86-755-27322216  
Website: [www.nrccsafety.com](http://www.nrccsafety.com)

Report Number: 240910070426-15  
Date of Test: 2024.08.22~ 2024.09.05  
Date of Issue: 2024.09.09

Tested By: Lvdaocai



*The results detailed in this test report relate only to the specific sample(s) tested. This report is not to be reproduced except in full, without written approval from NRCC Testing Technology.*

**TEST REPORT  
IEC 62133-2**

**Secondary cells and batteries containing alkaline or other non-acid electrolytes –  
Safety requirements for portable sealed secondary cells, and for batteries made  
from them, for use in portable applications-**

**Part 2: Lithium systems**

**Report Number**.....: 240910070426-15

**Date of issue**.....: 2024.09.09

**Total number of pages**.....: 29pages

**Applicant's name**.....:

**Address**.....:

**Test specification:**

**Standard**.....: IEC 62133-2:2017, IEC 62133-2:2017/AMD1:2021

**Test procedure**.....: Test Report

**Non-standard test method**.....: N/A

**Test item description**.....: Li-ion Polymer Battery

**Trade Mark**.....: N/A

**Manufacturer**.....: Same as applicant

**Address**.....: Same as applicant

**Model/Type reference**.....: 702032

**Ratings**.....: 3.7V, 300mAh, 1.11Wh

<b>Testing procedure and testing location:</b>	
<b>Testing Laboratory:</b>	
Testing location/ address: NRCC (Shenzhen) Safety Technology Co., Ltd. Building A, No.2, Tengfeng 5th Road, Fuyong, Bao'an District, Shenzhen	
<b>List of Attachments:</b>	
Appendix 1: 3 pages of Photo Documentation	
<b>Summary of testing:</b>	
<b>Tests performed (name of test and test clause):</b>  cl.5.6.2 Design recommendation; cl.7.1 Charging procedure for test purposes (for Cells and Batteries); cl.7.2.1 Continuous charging at constant voltage (Cells); cl.7.2.2 Case stress at high ambient temperature (Batteries); cl.7.3.1 External short circuit (Cells); cl.7.3.2 External short circuit (Batteries); cl.7.3.3 Free fall (Cells and Batteries); cl.7.3.4 Thermal abuse (Cells); cl.7.3.5 Crush (Cells); cl.7.3.6 Over-charging of battery; cl.7.3.7 Forced discharge (Cells); cl.7.3.8 Mechanical tests (Batteries); cl.7.3.9 Design evaluation – Forced internal short circuit (Cells)  Tests are made with the number of cells and batteries specified in IEC 62133-2: 2017+A1 Table 1.	<b>Testing location:</b>  NRCC (Shenzhen) Safety Technology Co., Ltd. Building A, No.2, Tengfeng 5th Road, Fuyong, Bao'an District, Shenzhen
<b>Summary of compliance with National Differences</b>  N/A  <input checked="" type="checkbox"/> The product fulfill the requirements of <u><a href="#">EN62133-2: 2017+A1</a></u>	

**Copy of marking plate**

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

Li-ion Polymer Battery  
702032 (1ICP8/21/33)  
Rated: 3.7V 300mAh 1.11Wh

Red wire(+), Black wire(-) YY.MM

<b>Test item particulars.....</b>	
<b>Classification of installation and use.....</b>	To be defined in final product
<b>Supply connection.....</b>	Lead wire
<b>Recommend charging method declared by the manufacturer.....</b>	Charging the battery with 150mA constant current until 4.2V, then constant voltage until charge current reduces to 3mA at ambient 20°C±5°C.
<b>Discharge current (0,2 I<sub>t</sub> A).....</b>	30mA
<b>Specified final voltage.....</b>	3.0V
<b>Upper limit charging voltage per cell.....</b>	4.2V
<b>Maximum charging current.....</b>	300mA
<b>Charging temperature upper limit.....</b>	45°C
<b>Charging temperature lower limit.....</b>	0°C
<b>Polymer cell electrolyte type.....</b>	<input type="checkbox"/> gel polymer <input type="checkbox"/> solid polymer <input checked="" type="checkbox"/> N/A
<b>Possible test case verdicts:</b>	
- test case does not apply to the test object.....	N/A
- test object does meet the requirement.....	P (Pass)
- test object does not meet the requirement.....	F (Fail)
<b>Testing.....</b>	:
<b>Date of receipt of test item.....</b>	2024.08.22
<b>Date (s) of performance of tests.....</b>	2024.08.22~ 2024.09.05
<b>General remarks:</b>	
The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory. "(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report. <b>Throughout this report a <input type="checkbox"/> comma / <input checked="" type="checkbox"/> point is used as the decimal separator.</b>	
<b>Name and address of factory (ies) .....</b>	:Same as applicant

**General product information:**

This battery is constructed with one lithium-ion cell and has overcharge, over-discharge, over current and short-circuits proof circuit.

The main features of the battery pack are shown as below (clause 7.1.1):


Model	Nominal capacity	Nominal voltage	Nominal Charge Current	Nominal Discharge Current	Maximum Charge Current	Maximum Discharge Current	Maximum Charge Voltage	Cut-off Voltage
702032 (Battery)	300mAh	3.7V	150mA	150mA	300mA	7500mA	4.2V	3.0V


The main features of the cell in the battery pack are shown as below (clause 7.1.1):

Model	Nominal capacity	Nominal voltage	Nominal Charge Current	Nominal Discharge Current	Maximum Charge Current	Maximum Discharge Current	Maximum Charge Voltage	Cut-off Voltage
702032 (Cell)	300mAh	3.7V	150mA	150mA	300mA	7500mA	4.2V	3.0V

The main features of the cell in the battery pack are shown as below (clause 7.1.2):

Model	Upper limit charge voltage	Taper-off current	Lower charge temperature	Upper charge temperature
702032 (Cell)	4.2V	15mA	0°C	45°C

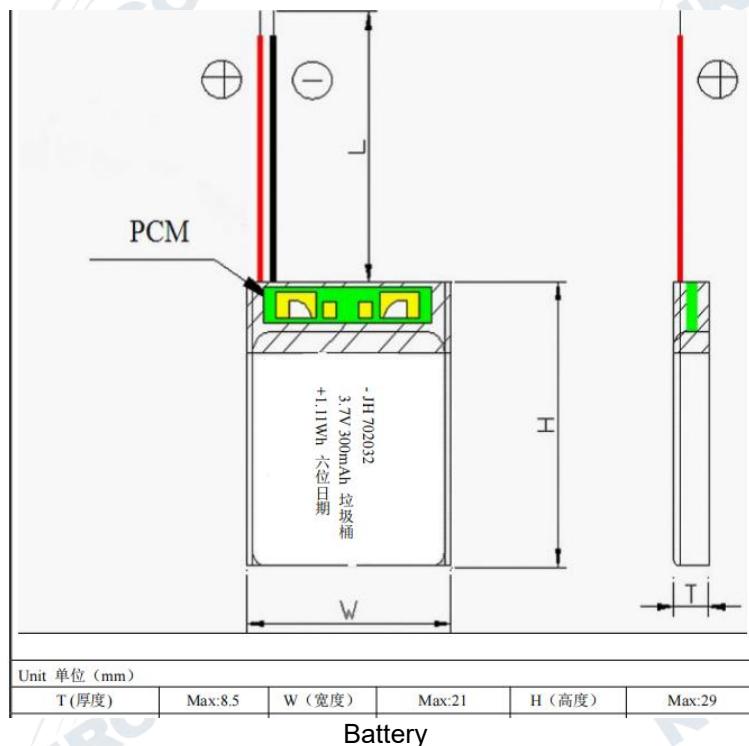**Construction:**

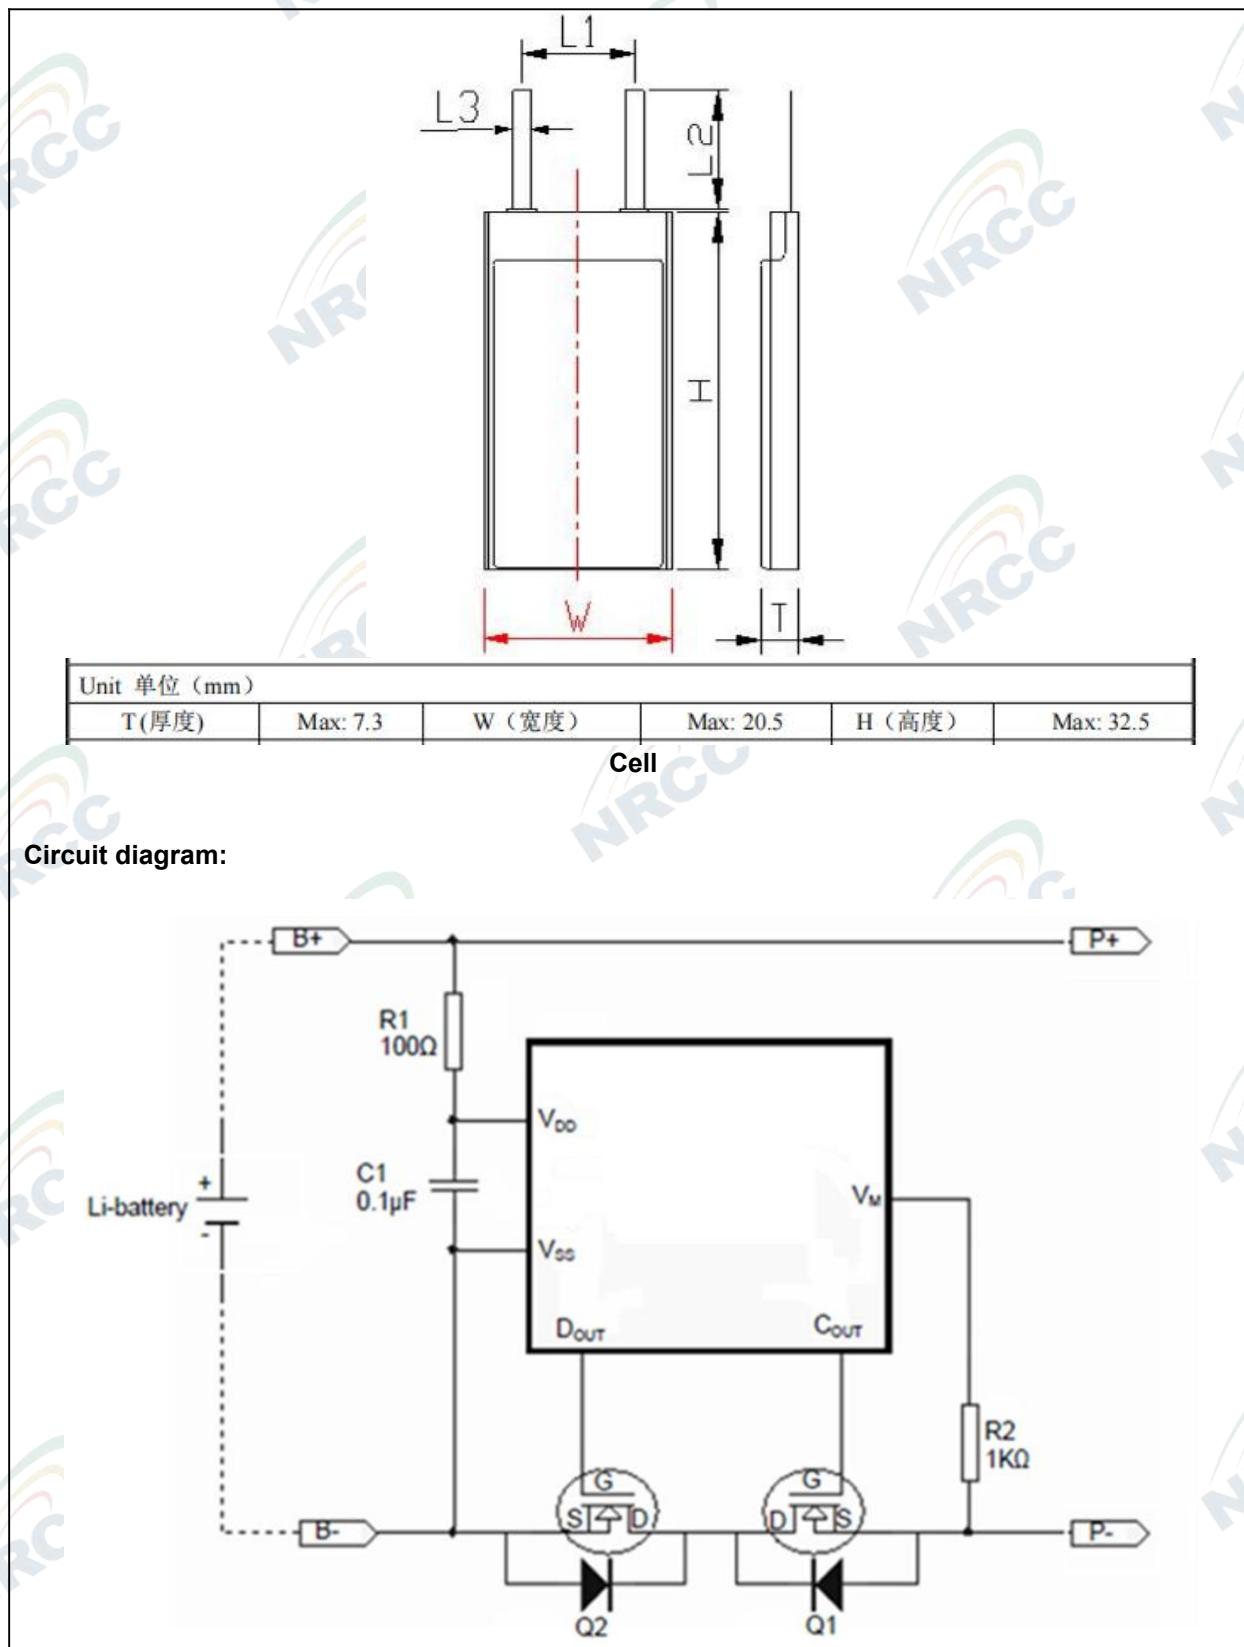


IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
<b>4</b>	<b>PARAMETER MEASUREMENT TOLERANCES</b>		P
	Parameter measurement tolerances		P
<b>5</b>	<b>GENERAL SAFETY CONSIDERATIONS</b>		P
<b>5.1</b>	<b>General</b>		P
	Cells and batteries so designed and constructed that they are safe under conditions of both intended use and reasonably foreseeable misuse		P
<b>5.2</b>	<b>Insulation and wiring</b>		P
	The insulation resistance between the positive terminal and externally exposed metal surfaces of the battery (excluding electrical contact surfaces) is not less than $5\text{ M}\Omega$	No metal surface exists.	N/A
	Insulation resistance ( $\text{M}\Omega$ ).....		—
	Internal wiring and insulation are sufficient to withstand maximum anticipated current, voltage and temperature requirements		P
	Orientation of wiring maintains adequate clearance and creepage distances between conductors		P
	Mechanical integrity of internal connections accommodates reasonably foreseeable misuse		P
<b>5.3</b>	<b>Venting</b>		P
	Battery cases and cells incorporate a pressure relief mechanism or are constructed so that they relieve excessive internal pressure at a value and rate that will preclude rupture, explosion and self-ignition		P
	Encapsulation used to support cells within an outer casing does not cause the battery to overheat during normal operation nor inhibit pressure relief		N/A
<b>5.4</b>	<b>Temperature, voltage and current management</b>		P
	Batteries are designed such that abnormal temperature rise conditions are prevented	Overcharge, over discharge, over current and short-circuit proof circuit used in this battery. See tests of clause 7.	P
	Batteries are designed to be within temperature, voltage and current limits specified by the cell manufacturer	See above.	P
	Batteries are provided with specifications and charging instructions for equipment manufacturers so that specified chargers are designed to maintain charging within the temperature, voltage and current limits specified	The charging limits specified in the manufacturer's specification.	P

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
<b>5.5</b>	<b>Terminal contacts</b>		P
	The size and shape of the terminal contacts ensure that they can carry the maximum anticipated current	The “Red wire +” and “Black wire -” polarity explicitly marked on surface of the battery.	P
	External terminal contact surfaces are formed from conductive materials with good mechanical strength and corrosion resistance		P
	Terminal contacts are arranged to minimize the risk of short-circuit		P
<b>5.6</b>	<b>Assembly of cells into batteries</b>		P
5.6.1	General		P
	Each battery have an independent control and protection for current, voltage, temperature and any other parameter required for safety and to maintain the cells within their operating region	Protective circuit equipped on battery.	P
	This protection may be provided external to the battery such as within the charger or the end devices		N/A
	If protection is external to the battery, the manufacturer of the battery provide this safety relevant information to the external device manufacturer for implementation		N/A
	If there is more than one battery housed in a single battery case, each battery have protective circuitry that can maintain the cells within their operating regions		N/A
	Manufacturers of cells specify current, voltage and temperature limits so that the battery manufacturer/designer may ensure proper design and assembly	Current, voltage and temperature limits specified by cell manufacturer.	P
	Batteries that are designed for the selective discharge of a portion of their series connected cells incorporate circuitry to prevent operation of cells outside the limits specified by the cell manufacturer		N/A
	Protective circuit components added as appropriate and consideration given to the end-device application		P
	The manufacturer of the battery provide a safety analysis of the battery safety circuitry with a test report including a fault analysis of the protection circuit under both charging and discharging conditions confirming the compliance		N/A
5.6.2	Design recommendation		P

## IEC 62133-2

Clause	Requirement + Test	Result - Remark	Verdict
	For the battery consisting of a single cell or a single cell block, it is recommended that the charging voltage of the cell does not exceed the upper limit of the charging voltage specified in Table 2	Single cell battery, Max. Charging voltage of cell: 4.2V, not exceed 4.2V specified in Clause 7.1.2, Table 2.	P
	For the battery consisting of series-connected plural single cells or series-connected plural cell blocks, it is recommended that the voltages of any one of the single cells or single cell blocks does not exceed the upper limit of the charging voltage, specified in Table 2, by monitoring the voltage of every single cell or the single cell blocks		N/A
	For the battery consisting of series-connected plural single cells or series-connected plural cell blocks, it is recommended that charging is stopped when the upper limit of the charging voltage is exceeded for any one of the single cells or single cell blocks by measuring the voltage of every single cell or the single cell blocks		N/A
	For batteries consisting of series-connected cells or cell blocks, nominal charge voltage not be counted as an overcharge protection		N/A
	For batteries consisting of series-connected cells or cell blocks, cells have closely matched capacities, be of the same design, be of the same chemistry and be from the same manufacturer		N/A
	It is recommended that the cells and cell blocks not discharged beyond the cell manufacturer's specified final voltage	Final voltage of cell: 3.0V, not exceed the final voltage specified by cell manufacturer.	P
	For batteries consisting of series-connected cells or cell blocks, cell balancing circuitry incorporated into the battery management system		N/A
5.6.3	Mechanical protection for cells and components of batteries		P
	Mechanical protection for cells, cell connections and control circuits within the battery provided to prevent damage as a result of intended use and reasonably foreseeable misuse	Mechanical protection for cell connections and control circuits provided.	P
	The mechanical protection can be provided by the battery case or it can be provided by the end product enclosure for those batteries intended for building into an end product	Build-in batteries, mechanical protection for cells should be provided by end product.	N/A
	The battery case and compartments housing cells designed to accommodate cell dimensional tolerances during charging and discharging as recommended by the cell manufacturer	To be evaluated in final system.	N/A

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
	For batteries intended for building into a portable end product, testing with the battery installed within the end product considered when conducting mechanical tests		N/A
5.7	<b>Quality plan</b>		P
	The manufacturer prepares and implements a quality plan that defines procedures for the inspection of materials, components, cells and batteries and which covers the whole process of producing each type of cell or battery	Complied. ISO 9001 certificate provided.	P
5.8	<b>Battery safety components</b>		N/A
	According annex F	See TABLE: Critical components information	N/A
6	TYPE TEST AND SAMPLE SIZE		P
	Tests are made with the number of cells or batteries specified in Table 1 using cells or batteries that are not more than six months old		P
	Coin cells with resistance $\leq 3 \Omega$ (measured according annex D) are tested according table 1	Not coin cells	N/A
	Unless otherwise specified, tests are carried out in an ambient temperature of $20^{\circ}\text{C} \pm 5^{\circ}\text{C}$		P
	The safety analysis of 5.6.1 identify those components of the protection circuit that are critical for short-circuit, overcharge and over discharge protection		P
	When conducting the short-circuit test, consideration given to the simulation of any single fault condition that is likely to occur in the protecting circuit that would affect the short-circuit test	See clause 7.3.2.	P
7	SPECIFIC REQUIREMENTS AND TESTS		P
7.1	<b>Charging procedure for test purposes</b>		P
7.1.1	First procedure		P
	This charging procedure applies to subclauses other than those specified in 7.1.2		P
	Unless otherwise stated in this document, the charging procedure for test purposes is carried out in an ambient temperature of $20^{\circ}\text{C} \pm 5^{\circ}\text{C}$ , using the method declared by the manufacturer		P
	Prior to charging, the battery have been discharged at $20^{\circ}\text{C} \pm 5^{\circ}\text{C}$ at a constant current of 0,2 It A down to a specified final voltage		P

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
7.1.2	Second procedure		P
	This charging procedure applies only to 7.3.1, 7.3.4, 7.3.5, and 7.3.9		P
	After stabilization for 1 h to 4 h, at an ambient temperature of the highest test temperature and the lowest test temperature, respectively, as specified in Table 2, cells are charged by using the upper limit charging voltage and maximum charging current, until the charging current is reduced to 0,05 It A, using a constant current to constant voltage charging method	Charge temperature specified by manufacturer: 0-45°C.	P
7.2	<b>Intended use</b>		P
7.2.1	Continuous charging at constant voltage (cells)		P
	Fully charged cells are subjected for 7 days to a charge using the charging method for current and standard voltage specified by the cell manufacturer	Charging for 7days with 150mA.	P
	Results: No fire. No explosion. No leakage.....: (See appended table 7.2.1)		P
7.2.2	Case stress at high ambient temperature (battery)		P
	Oven temperature (°C).....: 70°C		—
	Results:No physical distortion of the battery case resulting in exposure of internal protective components and cells	No physical distortion of the battery casing.	P
7.3	<b>Reasonably foreseeable misuse</b>		P
7.3.1	External short-circuit (cell)	Tested complied.	P
	The cells were tested until one of the following occurred:		P
	- 24 hours elapsed; or		N/A
	- The case temperature declined by 20% of the maximum temperature rise		P
	Results: No fire. No explosion.....: (See appended table7.3.1)		P
7.3.2	External short-circuit (battery)	Tested complied.	P
	The batteries were tested until one of the following occurred:		P
	- 24 hours elapsed; or		N/A
	- The case temperature declined by 20 % of the maximum temperature rise		P
	In case of rapid decline in short circuit current, the battery pack remained on test for an additional one hour after the current reached a low end steady state condition		P

## IEC 62133-2

Clause	Requirement + Test	Result - Remark	Verdict
	A single fault in the discharge protection circuit conducted on one to four (depending upon the protection circuit) of the five samples before conducting the short-circuit test	Single fault conducted on three samples.	P
	A single fault applies to protective component parts such as MOSFET, fuse, thermostat or positive temperature coefficient (PTC) thermistor	Single fault applies on MOSFET.	P
	Results: No fire. No explosion..... : (See appended table7.3.2)	(See appended table7.3.2)	P
7.3.3	Free fall	Tested complied.	P
	Results: No fire. No explosion	No fire. No explosion	P
7.3.4	Thermal abuse (cells)	Tested complied.	P
	Oven temperature (°C)..... : 130°C	130°C	—
	Results: No fire. No explosion	No fire. No explosion	P
7.3.5	Crush (cells)	Tested complied.	P
	The crushing force was released upon:		P
	- The maximum force of 13 kN $\pm 0,78$ kN has been applied; or		P
	- An abrupt voltage drop of one-third of the original voltage has been obtained		N/A
	Results: No fire. No explosion..... : (See appended table 7.3.5)	(See appended table 7.3.5)	P
7.3.6	Over-charging of battery	Tested complied.	P
	The supply voltage which is:		P
	- 1,4 times the upper limit charging voltage presented in Table A.1 (but not to exceed 6,0 V) for single cell/cell block batteries or	5.88V applied.	P
	- 1,2 times the upper limit charging voltage presented in Table A.1 per cell for series connected multi-cell batteries, and		N/A
	- Sufficient to maintain a current of 2,0 It A throughout the duration of the test or until the supply voltage is reached		P
	Test was continued until the temperature of the outer casing:		P
	- Reached steady state conditions (less than 10°C change in 30-minute period); or		N/A
	- Returned to ambient		P
	Results: No fire. No explosion..... : (See appended table7.3.6)	(See appended table7.3.6)	P
7.3.7	Forced discharge (cells)	Tested complied.	P

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
	If the discharge voltage reaches the negative value of upper limit charging voltage within the testing duration, the voltage is maintained at the negative value of the upper limit charging voltage by reducing the current for the remainder of the testing duration		N/A
	If the discharge voltage does not reach the negative value of upper limit charging voltage within the testing duration, the test is terminated at the end of the testing duration		P
	Results: No fire. No explosion.....:	(See appended table7.3.7)	P
7.3.8	Mechanical tests (batteries)		P
7.3.8.1	Vibration	Tested complied.	P
	Results: No fire, no explosion, no rupture, no leakage or venting.....:	(See appended table 7.3.8.1)	P
7.3.8.2	Mechanical shock	Tested complied.	P
	Results: No leakage, no venting, no rupture, no explosion and no fire.....:	(See appended table 7.3.8.2)	P
7.3.9	Design evaluation – Forced internal short-circuit (cells)	Tested complied.	P
	The cells complied with national requirement for.....:	France, Japan, Republic of Korea, Switzerland	—
	The pressing was stopped upon:		P
	- A voltage drop of 50 mV has been detected; or		N/A
	- The pressing force of 800 N (cylindrical cells) or 400 N (prismatic cells) has been reached	400N for prismatic cells cell.	P
	Results: No fire.....:	(See appended table7.3.9)	P
<b>8</b>	<b>INFORMATION FOR SAFETY</b>		P
8.1	<b>General</b>		P
	Manufacturers of secondary cells ensure that information is provided about current, voltage and temperature limits of their products	Information for safety mentioned in manufacturer's specifications.	P
	Manufacturers of batteries ensure that equipment manufacturers and, in the case of direct sales, end-users are provided with information to minimize and mitigate hazards	Information for safety mentioned in manufacturer's specifications.	P
	Systems analyses performed by device manufacturers to ensure that a particular battery design prevents hazards from occurring during use of a product		N/A

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
	As appropriate, any information relating to hazard avoidance resulting from a system analysis provided to the end user		N/A
	Do not allow children to replace batteries without adult supervision		P
<b>8.2</b>	<b>Small cell and battery safety information</b>	Small batteries.	P
	The following warning language is to be provided with the information packaged with the small cells and batteries or equipment using them:		P
	- Keep small cells and batteries which are considered swallowable out of the reach of children		P
	- Swallowing may lead to burns, perforation of soft tissue, and death. Severe burns can occur within 2 h of ingestion		P
	- In case of ingestion of a cell or battery, seek medical assistance promptly		P
<b>9</b>	<b>MARKING</b>		P
<b>9.1</b>	<b>Cell marking</b>	The final product is battery	N/A
	Cells marked as specified in IEC 61960, except coin cells		N/A
	Coin cells whose external surface area is too small to accommodate the markings on the cells show the designation and polarity		N/A
	By agreement between the cell manufacturer and the battery and/or end product manufacturer, component cells used in the manufacture of a battery need not be marked		N/A
<b>9.2</b>	<b>Battery marking</b>		P
	Batteries marked as specified in IEC 61960, except for coin batteries	See marking plate.	P
	Coin batteries whose external surface area is too small to accommodate the markings on the batteries show the designation and polarity. Batteries also marked with an appropriate caution statement		N/A
	Terminals have clear polarity marking on the external surface of the battery	The "Red wire: +" and "Black wire -" polarity explicitly marked on surface of the battery.	P

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
	Batteries with keyed external connectors designed for connection to specific end products need not be marked with polarity markings if the design of the external connector prevents reverse polarity connections		N/A
9.3	<b>Caution for ingestion of small cells and batteries</b>	Small batteries.	P
	Coin cells and batteries identified as small batteries according to 8.2 include a caution statement regarding the hazards of ingestion in accordance with 8.2		N/A
	When small cells and batteries are intended for direct sale in consumer-replaceable applications, caution for ingestion given on the immediate package		P
9.4	<b>Other information</b>		P
	Storage and disposal instructions	Information for storage and disposal instructions mentioned in manufacturer's specifications.	P
	Recommended charging instructions	Information for recommended charging instructions mentioned in manufacturer's specifications.	P
10	<b>PACKAGING AND TRANSPORT</b>		P
	Packaging for coin cells not small enough to fit within the limits of the ingestion gauge of Figure 3	Not coin cells.	N/A
	The materials and packaging design are chosen so as to prevent the development of unintentional electrical conduction, corrosion of the terminals and ingress of environmental contaminants		P
<b>ANNEX A</b>	<b>CHARGING AND DISCHARGING RANGE OF SECONDARY LITHIUM ION CELLS FOR SAFE USE</b>		P
A.1	<b>General</b>		P
A.2	<b>Safety of lithium ion secondary battery</b>	Complied.	P
A.3	<b>Consideration on charging voltage</b>	Complied.	P
A.3.1	General		P
A.3.2	Upper limit charging voltage	4.2V applied.	P
A.3.2.1	General		P
A.3.2.2	Explanation of safety viewpoint		N/A

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
A.3.2.3	Safety requirements, when different upper limit charging voltage is applied	4.2V applied.	N/A
<b>A.4</b>	<b>Consideration of temperature and charging current</b>		P
A.4.1	General		P
A.4.2	Recommended temperature range	See A.4.2.2.	P
A.4.2.1	General		P
A.4.2.2	Safety consideration when a different recommended temperature range is applied	Charging temperature declared by client is: 0-45°C	N/A
A.4.3	High temperature range		N/A
A.4.3.1	General		N/A
A.4.3.2	Explanation of safety viewpoint		N/A
A.4.3.3	Safety considerations when specifying charging conditions in the high temperature range		N/A
A.4.3.4	Safety considerations when specifying a new upper limit in the high temperature range		N/A
A.4.4	Low temperature range		N/A
A.4.4.1	General		N/A
A.4.4.2	Explanation of safety viewpoint		N/A
A.4.4.3	Safety considerations, when specifying charging conditions in the low temperature range		N/A
A.4.4.4	Safety considerations when specifying a new lower limit in the low temperature range		N/A
A.4.5	Scope of the application of charging current		P
A.4.6	Consideration of discharge		P
A.4.6.1	General		P
A.4.6.2	Final discharge voltage and explanation of safety viewpoint	Cell specified final voltage 3.0V, not exceed 3.0V specified by cell manufacturer.	P
A.4.6.3	Discharge current and temperature range		P
A.4.6.4	Scope of application of the discharging current		P
<b>A.5</b>	<b>Sample preparation</b>		P
A.5.1	General		P
A.5.2	Insertion procedure for nickel particle to generate internal short		P
A.5.3	Disassembly of charged cell		P
A.5.4	Shape of nickel particle		P

IEC 62133-2			
Clause	Requirement + Test	Result - Remark	Verdict
A.5.5	Insertion of nickel particle in cylindrical cell		N/A
A.5.5.1	Insertion of nickel particle in winding core		N/A
A.5.5.2	Marking the position of the nickel particle on both ends of the winding core of the separator		N/A
A.5.6	Insertion of nickel particle in prismatic cell		P
<b>A.6</b>	<b>Experimental procedure of the forced internal short-circuit test</b>		P
A.6.1	Material and tools for preparation of nickel particle		P
A.6.2	Example of a nickel particle preparation procedure		P
A.6.3	Positioning (or placement) of a nickel particle		P
A.6.4	Damaged separator precaution		P
A.6.5	Caution for rewinding separator and electrode		P
A.6.6	Insulation film for preventing short-circuit		P
A.6.7	Caution when disassembling a cell		P
A.6.8	Protective equipment for safety		P
A.6.9	Caution in the case of fire during disassembling		P
A.6.10	Caution for the disassembling process and pressing the electrode core		P
A.6.11	Recommended specifications for the pressing device		P
<b>ANNEX B</b>	<b>RECOMMENDATIONS TO EQUIPMENT MANUFACTURERS AND BATTERY ASSEMBLERS</b>	N/A	
<b>ANNEX C</b>	<b>RECOMMENDATIONS TO THE END-USERS</b>	N/A	
<b>ANNEX D</b>	<b>MEASUREMENT OF THE INTERNAL AC RESISTANCE FOR COIN CELLS</b>	N/A	
D.1	General	Not coin cells.	N/A
D.2	Method		N/A
	A sample size of three coin cells is required for this measurement.....	(See appended table D.2)	N/A
	Coin cells with an internal resistance of less than or equal to $3 \Omega$ are subjected to the testing according to Clause 6 and Table 1		N/A
	Coin cells with an internal resistance greater than $3 \Omega$ require no further testing		N/A
<b>ANNEX E</b>	<b>PACKAGING AND TRANSPORT</b>	N/A	

**IEC 62133-2**

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

<b>ANNEX F</b>	<b>COMPONENT STANDARDS REFERENCES</b>	N/A
----------------	---------------------------------------	-----

5.1 – 5.6	TABLE: Critical components information				
Object/part no.	Manufacturer/ trademark	Type/model	Technical data	Standard	Mark(s) of conformity
PCB	SHENZHEN MEIYADI ELECTRONICS Co., Ltd.	16mm(L)*4.5mm(W)*0.8mm(T)	V-0, 130°C	UL796	UL E348865
PCB (Alternative)	Interchangeable	Interchangeable	V-0, 130° C	UL 796	UL approved
IC(U1)	HYCON Technology Co., Ltd.	IC6011KB	Overcharge detection voltage:4.17-4.25V, Overdischarge detection voltage: Overcurrent detection voltage: 0.225V, Short protection voltage:0.85V Topr: -40°C ~+85°C	--	Tested with appliance
MOSFET (Q1, Q2)	semi-one	8806	VDS:15V, VGS:±10V, ID:5A, TJ:-55-150°C	--	Tested with appliance
Wire	DONG GUAN SHENG PAI ELECTRIC WIRE & CABLE co., Ltd.	3132	24AWG, Line diameter:1.49mm, fire-protection rating:V-1, Temperature tolerance :150°C, rated voltage:3KV	UL 758	UL E347603
Cell		702032	3.7V, 300mAh	IEC 62133-2:2017, IEC 62133-2:2017/AM D1:2021	Tested with appliance
-Positive electrode	Fangxian Shunfa New Energy Co., Ltd	LCO-202	LiCoO <sub>2</sub> , NMP, PVDF, Conductive, Additive	--	--
-Negative electrode	Shenzhen Ruifute Technology Co., Ltd.	AGF-6	Graphite, CMC, SBR, Distilled Water, Conductive Additive	--	--
-Separator	Dongguan Li-Ju New Energy material Co., Ltd.	0.014μm(Thickness)	PE, Shutdown temperature:135°C	--	--

-Electrolyte	ShenZhen Huachi New Energy Technolgy Co.,Ltd	HC611G	Composition: LiPF <sub>6</sub> , EC, DMC, DEC. Density(g/cm3):1.22 Conductivity(mS/cm):11. 2	--	--
Supplementary information: N/A					

7.2.1	TABLE: Continuous charging at constant voltage (cells)				P
Sample no.	Recommended charging voltage $V_c$ (Vdc)	Recommended charging current $I_{rec}$ (A)	OCV before test(Vdc)	Results	
C1	4.20	0.15	4.19	P	
C2	4.20	0.15	4.19	P	
C3	4.20	0.15	4.18	P	
C4	4.20	0.15	4.19	P	
C5	4.20	0.15	4.18	P	

**Supplementary information:**

- No fire or explosion
- No leakage

7.3.1	TABLE: External short-circuit (cell)					P
Sample no.	Ambient T (°C)	OCV before test (Vdc)	Resistance of circuit (mΩ)	Maximum case temperature rise $\Delta T$ (°C)	Results	
<b>Samples charged at charging temperature upper limit (45°C)</b>						
C6	55.9	4.17	86.2	119.6	P	
C7	55.9	4.17	88.5	113.5	P	
C8	55.9	4.16	81.0	116.1	P	
C9	55.9	4.18	83.4	118.2	P	
C10	55.9	4.17	85.2	119.3	P	
<b>Samples charged at charging temperature lower limit (0°C)</b>						
C11	55.9	4.15	80.6	114.5	P	
C12	55.9	4.14	81.5	116.1	P	
C13	55.9	4.14	84.3	119.2	P	
C14	55.9	4.15	82.6	123.4	P	
C15	55.9	4.14	81.7	120.8	P	

**Supplementary information:**

- No fire or explosion

TABLE: External short-circuit (battery)						P
Sample no.	Ambient T (°C)	OCV before test (Vdc)	Resistance of circuit (mΩ)	Maximum case temperature rise ΔT (°C)	Component single fault condition	Results
B4	23.5	4.19	86.1	111.6	MOS	P
B5	23.5	4.19	83.2	108.7	MOS	P
B6	23.5	4.19	85.6	115.0	MOS	P
B7	23.5	4.18	80.7	23.9	--	P
B8	23.5	4.19	78.6	23.8	--	P

**Supplementary information:**

- No fire or explosion

TABLE: Crush (cells)					P
Sample no.	OCV before test (Vdc)	OCV at removal of crushing force (Vdc)	Maximum force applied to the cell during crush (kN)	Results	
<b>Samples charged at charging temperature upper limit (45°C)</b>					
C29	4.17	4.17	13		P
C30	4.17	4.17	13		P
C31	4.16	4.16	13		P
C32	4.16	4.16	13		P
C33	4.18	4.18	13		P
<b>Samples charged at charging temperature lower limit (0°C)</b>					
C34	4.15	4.15	13		P
C35	4.14	4.14	13		P
C36	4.14	4.14	13		P
C37	4.15	4.15	13		P
C38	4.15	4.15	13		P

**Supplementary information:**

- No fire or explosion

TABLE: Over-charging of battery					P
Constant charging current (A).....		0.6			—
Supply voltage (Vdc).....		5.88			—
Sample no.	OCV before charging (Vdc)	Total charging time (minute)	Maximum outer case temperature (°C)	Results	
B12	3.34	75	33.4		P

B13	3.35	75	31.8	P
B14	3.39	75	32.6	P
B15	3.33	75	32.0	P
B16	3.31	75	31.9	P

**Supplementary information:**

- No fire or explosion

7.3.7	TABLE: Forced discharge (cells)				P
Sample no.	OCV before application of reverse charge (Vdc)	Measured reverse charge $I_t$ (A)	Lower limit discharge voltage (Vdc)	Results	
C39	3.26	0.30	3.0	P	
C40	3.33	0.30	3.0	P	
C41	3.35	0.30	3.0	P	
C42	3.30	0.30	3.0	P	
C43	3.27	0.30	3.0	P	

**Supplementary information:**

- No fire or explosion

7.3.8.1	TABLE: Vibration					P
Sample no.	OCV before test (Vdc)	OCV after test (Vdc)	Mass before test (g)	Mass after test(g)	Results	
B17	4.18	4.18	7.446	7.445	P	
B18	4.19	4.18	7.419	7.418	P	
B19	4.19	4.18	7.382	7.380	P	

**Supplementary information:**

- No fire or explosion
- No rupture
- No leakage
- No venting

7.3.8.2	TABLE: Mechanical shock					P
Sample no.	OCV before test (Vdc)	OCV after test (Vdc)	Mass before test (g)	Mass after test(g)	Results	
B20	4.19	4.18	7.438	7.436	P	
B21	4.18	4.17	7.414	7.413	P	
B22	4.18	4.18	7.440	7.439	P	



**Supplementary information:**



- No fire or explosion
- No rupture
- No leakage
- No venting


7.3.9 TABLE: Forced internal short circuit (cells)						P		
Sample no.	Chamber ambient T (°C)	OCV before test (Vdc)	Particle location <sup>1)</sup>	Maximum applied pressure (N)	Results			
<b>Samples charged at charging temperature upper limit (45°C)</b>								
C44	45	4.13	1	400	P			
C45	45	4.13	1	400	P			
C46	45	4.14	1	400	P			
C47	45	4.14	1	400	P			
C48	45	4.13	1	400	P			
<b>Samples charged at charging temperature lower limit (0°C)</b>								
C49	0	4.11	1	400	P			
C50	0	4.12	1	400	P			
C51	0	4.10	1	400	P			
C52	0	4.11	1	400	P			
C53	0	4.11	1	400	P			
<b>Supplementary information:</b>								
<sup>1)</sup> Identify one of the following: 1: Nickel particle inserted between positive and negative (active material) coated area. 2: Nickel particle inserted between positive aluminium foil and negative active material coated area. - No fire or explosion								

D.2 TABLE: Internal AC resistance for coin cells					N/A
Sample no.	Ambient T (°C)	Store time (h)	Resistance Rac (Ω)	Results <sup>1)</sup>	

**Supplementary information:**
<sup>1)</sup> Coin cells with internal resistance less than or equal to 3 Ω, see test result on corresponding tables

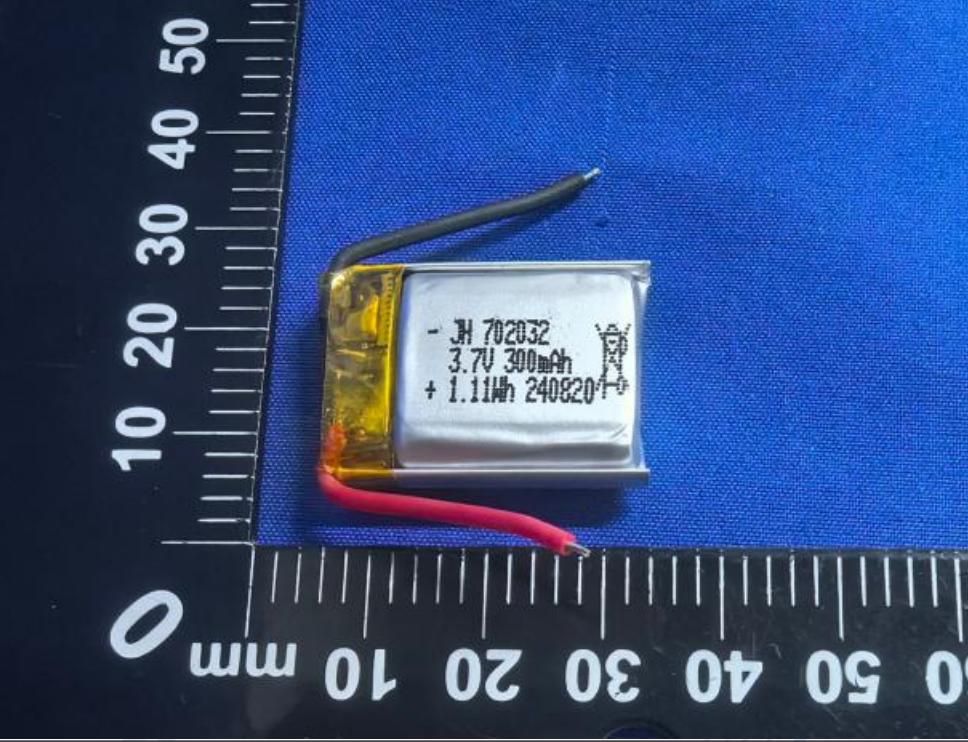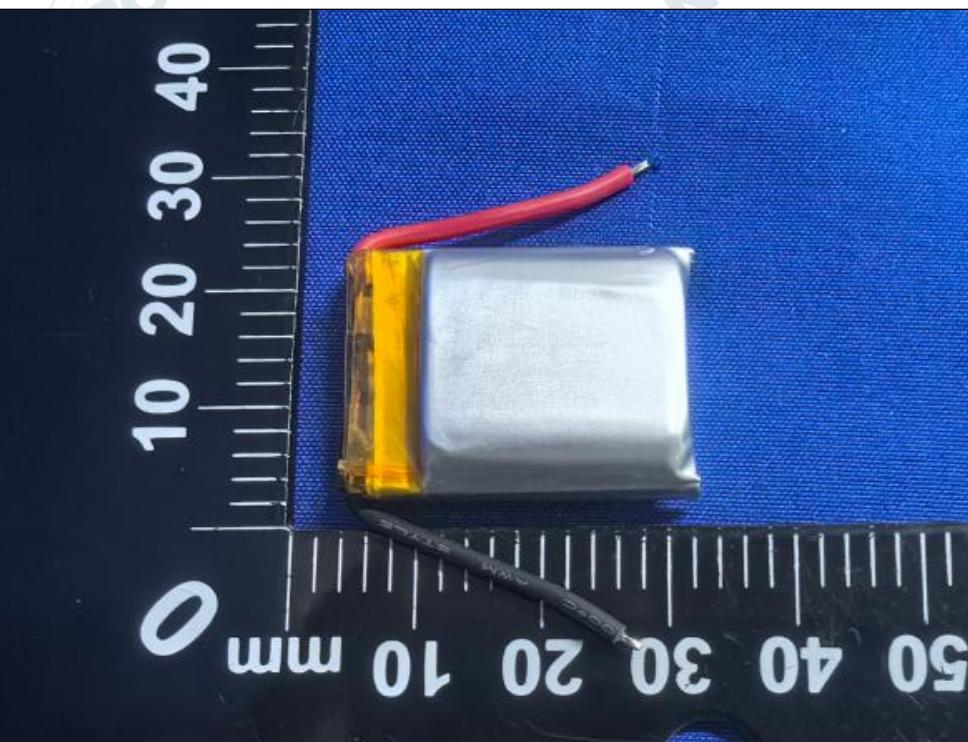Details of:	Fig.1-Front view of battery
	
Details of:	Fig. 2-Back view of battery
	

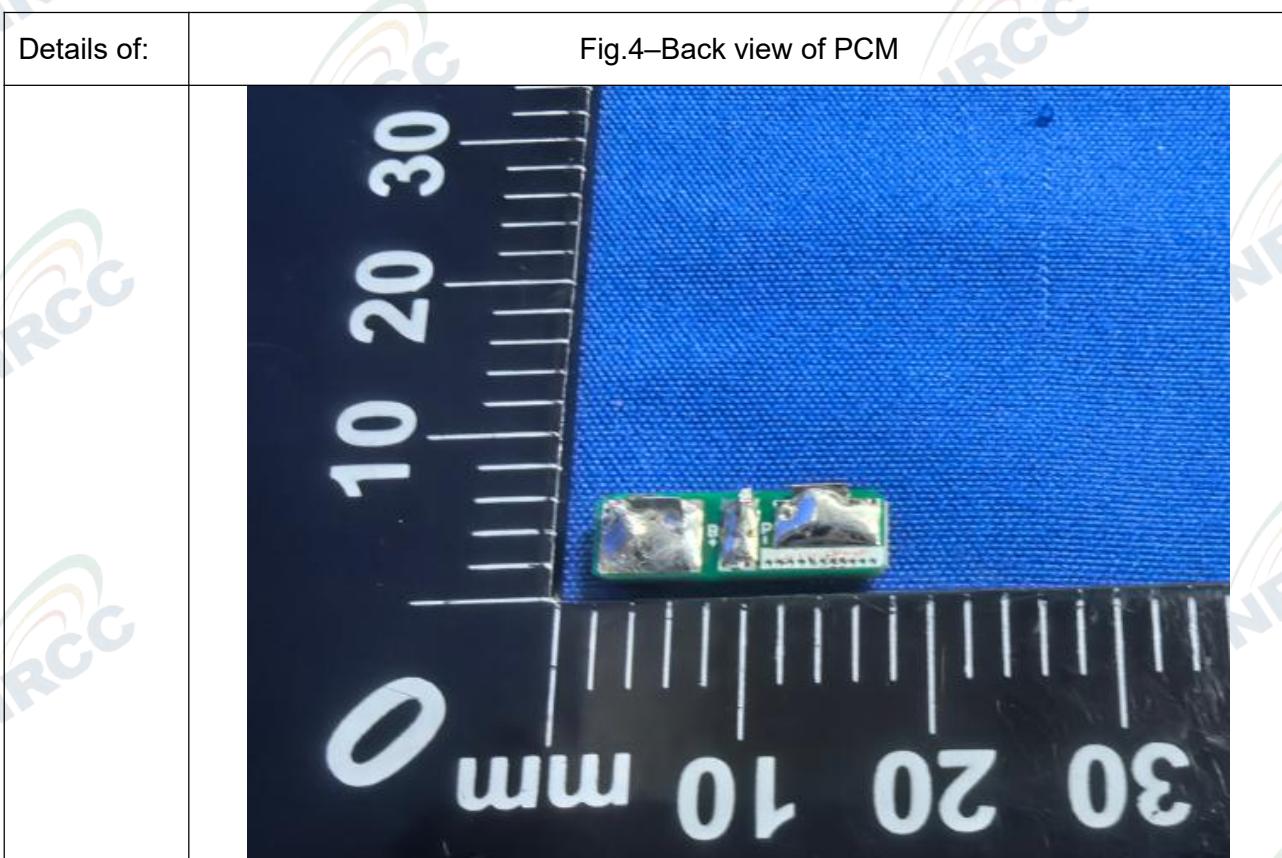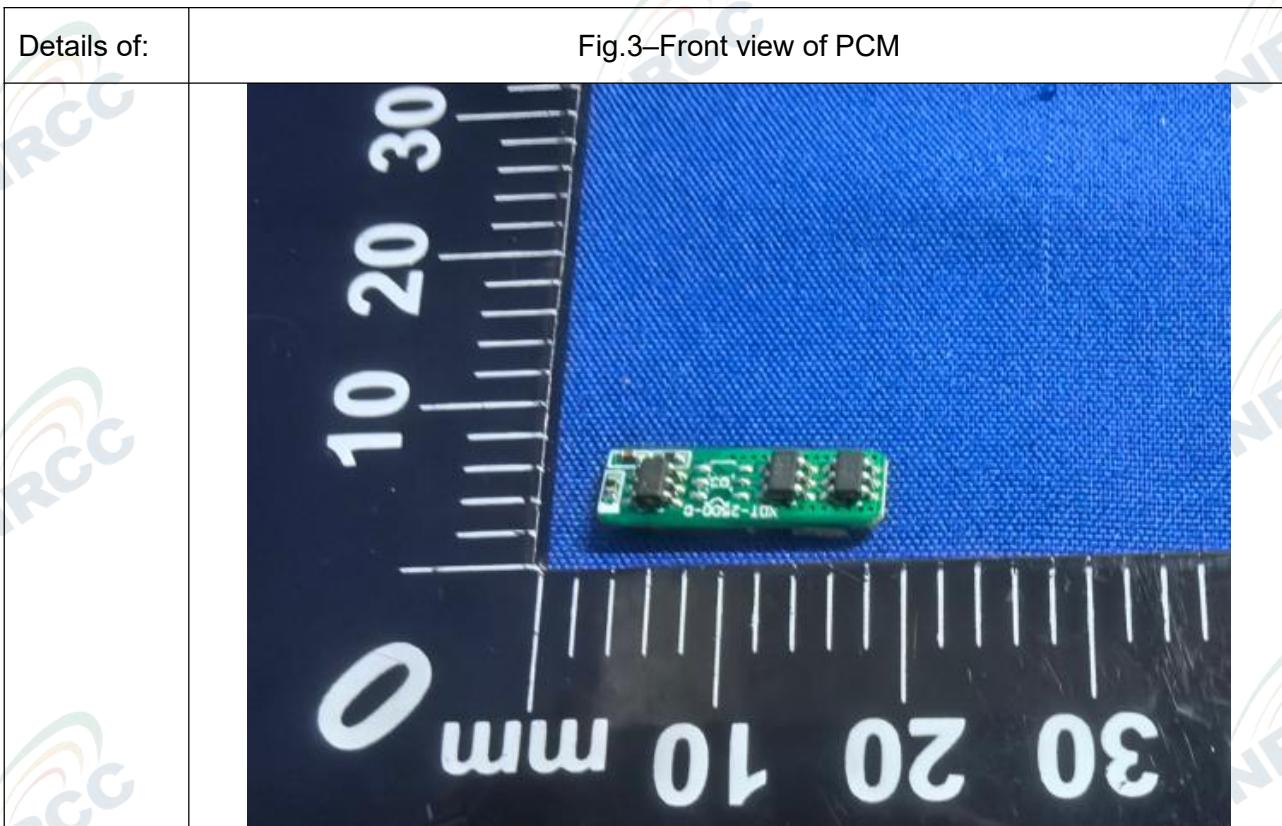

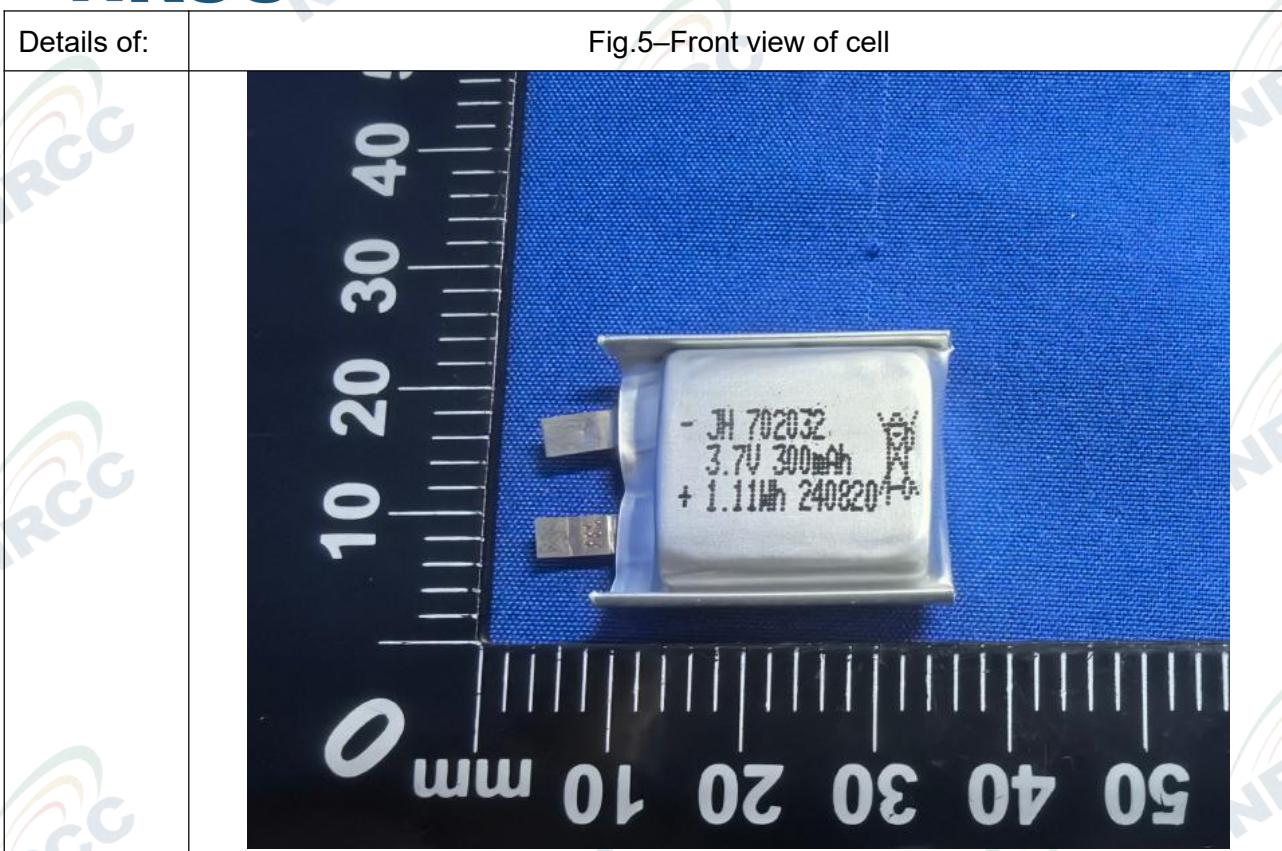

## NOTE

1. This report is invalid until signed by the approver and sealed by the NRCC (Shenzhen) Safety Technology Co., Ltd. (Hereinafter referred to as "the Laboratory").
2. This report is invalid with any unauthorized alternaton, forgery, falsification or partial replication.
3. If necessary, clients' submitting additional testing reports (original copy) or data related to goods transport classification to the laboratory is required, and the client should bear liability for the authenticity of those informations; the testing data submitted by client should be obtained by testing methods regulated by national standards or international standards.
4. This report is only valid to the conclusion under the precondition that client submitted real entrusted materials and samples, and the conclusion result is not relevant with other materials sharing same name or congeners.
5. When significate changing of manufacturing process, materials, components, or other factors of the battery may change its hazard classification, this battery should be identified again; If relative regulations or standards update, the conclusions may change, and the battersys should be identified again.
6. Visiting [www.nrccsafety.com](http://www.nrccsafety.com), or contact us by telephone, email could check report authenticity.

**---End of Test Report---**