



中国认可
国际互认
检测
TESTING
CNAS L6478



TEST REPORT

Reference No...... : WTF24F03057624W003
Applicant..... : Mid Ocean Brands B.V.
Address..... : 7/F., Kings Tower, 111 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong
Manufacturer : 114746
Address..... : ---
Product Name..... : Wireless bamboo speaker
Model No...... : MO6385
Test specification..... : ETSI EN 301 489-1 V2.2.3 (2019-11)
ETSI EN 301 489-17 V3.2.4 (2020-09)
Date of Receipt sample : 2024-03-21
Date of Test : 2024-03-23
Date of Issue..... : 2024-04-08
Test Report Form No. : WEW-301489A-01B
Test Result..... : Pass

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:

Waltek Testing Group (Foshan) Co., Ltd.

Address: 1/F., Building 19, Sunlink Machinery City, Xingye 4 Road,
Guanglong Industrial Park, Chihua Neighborhood Committee, Chencun Town,
Shunde District, Foshan, Guangdong, China

Tel:+86-757-23811398 Fax:+86-757-23811381 E-mail:info@waltek.com.cn

Tested by:

Approved by:

Roy Hong

Danny Zhou



1 Test Summary

Emission				
Test	Test Requirement	Test Method	Class / Severity	Result
Conducted Emissions	ETSI EN 301 489-17 V3.2.4	ETSI EN 301 489-1 V2.2.3 EN 55032	Table A.10 of EN 55032	Pass
Radiation Emission	ETSI EN 301 489-17 V3.2.4	ETSI EN 301 489-1 V2.2.3 EN 55032	Table A.4 and Table A.5 of EN 55032	Pass
Harmonic Current Emissions	ETSI EN 301 489-17 V3.2.4	ETSI EN 301 489-1 V2.2.3 EN 61000-3-2	Clause 7 of EN 61000-3-2	N/A
Voltage Fluctuations and Flicker	ETSI EN 301 489-17 V3.2.4	ETSI EN 301 489-1 V2.2.3 EN 61000-3-3	Clause 5 of EN 61000-3-3	N/A
Immunity				
Test	Test Requirement	Test Method	Class / Severity	Result
Electrostatic Discharge (ESD)	ETSI EN 301 489-17 V3.2.4	ETSI EN 301 489-1 V2.2.3 EN 61000-4-2	$\pm 2/\pm 4$ kV Contact $\pm 2/\pm 4/\pm 8$ kV Air	Pass
Radio frequency electromagnetic field (80 MHz to 6 000MHz)	ETSI EN 301 489-17 V3.2.4	ETSI EN 301 489-1 V2.2.3 EN 61000-4-3	3V/m, 80%, 1kHz, Amp. Mod.	Pass
Fast Transients Common Mode (EFT)	ETSI EN 301 489-17 V3.2.4	ETSI EN 301 489-1 V2.2.3 EN 61000-4-4	AC $\pm 0.5/1.0$ kV	Pass
Surge	ETSI EN 301 489-17 V3.2.4	ETSI EN 301 489-1 V2.2.3 EN 61000-4-5	± 1 kV D.M. $\dagger$ ± 2 kV C.M. $\ddagger$	Pass
RF common mode 0,15 MHz to 80 MHz (CS)	ETSI EN 301 489-17 V3.2.4	ETSI EN 301 489-1 V2.2.3 EN 61000-4-6	3Vrms(emf), 80%, 1kHz Amp. Mod.	Pass
Voltage Dips and Interruptions	ETSI EN 301 489-17 V3.2.4	ETSI EN 301 489-1 V2.2.3 EN 61000-4-11	0 % UT* for 0.5per 0 % UT* for 1per 70 % UT* for 25per 0 % UT* for 250per	Pass

Remark:

- Pass Test item meets the requirement
- Fail Test item does not meet the requirement
- N/A Test case does not apply to the test object
- A.M Amplitude Modulation
- $\dagger$ Differential Mode
- $\ddagger$ Common Mode
- * U_T is the nominal supply voltage



2 Contents

	Page
1 TEST SUMMARY	2
2 CONTENTS	3
3 GENERAL INFORMATION	4
3.1 GENERAL DESCRIPTION OF E.U.T.	4
3.2 DETAILS OF E.U.T.	4
3.3 DESCRIPTION OF SUPPORT UNITS	4
3.4 STANDARDS APPLICABLE FOR TESTING	4
3.5 TEST FACILITY	5
3.6 SUBCONTRACTED	5
3.7 ABNORMALITIES FROM STANDARD CONDITIONS	5
4 EQUIPMENT USED DURING TEST	6
4.1 EQUIPMENT LIST	6
4.2 SOFTWARE LIST	8
4.3 MEASUREMENT UNCERTAINTY	8
4.4 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	9
4.5 DECISION RULE	9
5 EMC REQUIREMENTS FOR EMISSIONS	10
5.1 CONDUCTED EMISSION	10
5.2 RADIATED EMISSION	13
6 EMC REQUIREMENT FOR IMMUNITY	23
6.1 PERFORMANCE CRITERIA	23
6.2 ELECTROSTATIC DISCHARGE(ESD)	24
6.3 RF ELECTROMAGNETIC FIELD (80MHZ TO 6 000MHZ) (RS)	26
6.4 FAST TRANSIENTS COMMON MODE (EFT)	28
6.5 SURGES	30
6.6 RF COMMON MODE 0,15 MHZ TO 80MHZ (CS)	32
6.7 VOLTAGE DIPS AND INTERRUPTIONS	34
7 PHOTOGRAPHS - TEST SETUP	35
7.1 PHOTOGRAPH - RADIATED EMISSIONS TEST SETUP	35
7.2 PHOTOGRAPH - CONDUCTED EMISSIONS TEST SETUP	36
7.3 PHOTOGRAPH - RF ELECTROMAGNETIC FIELD TEST SETUP	36
7.4 PHOTOGRAPH - ESD TEST SETUP	37
7.5 PHOTOGRAPH - EFT IMMUNITY TEST SETUP	37
7.6 PHOTOGRAPH - SURGE IMMUNITY TEST SETUP	38
7.7 PHOTOGRAPH - RADIO-FREQUENCY COMMON MODE TEST SETUP	38
7.8 PHOTOGRAPH - VOLTAGE DIPS AND INTERRUPTIONS IMMUNITY TEST SETUP	39
8 PHOTOGRAPHS – EUT CONSTRUCTIONAL DETAILS	40



3 General Information

3.1 General Description of E.U.T.

Product Name : Wireless bamboo speaker

Model No. : MO6385

Remark : ---

3.2 Details of E.U.T.

Technical Data : Input: DC 5V, 0.3A
Battery: 3.7V, 300mAh, 1.11Wh

3.3 Description of Support Units

The EUT has been tested as an independent unit. MO6385 is the test sample. The DV and RE tests were performed in the condition of AC 240V/50Hz input. The other tests were performed in the condition of AC 230V/50Hz input. The tests under AC input condition were performed with the AC adapter specified by the laboratory. The RE, ESD and RS tests were performed in the additional condition of battery 3.7V input.

3.4 Standards Applicable for Testing

The tests were performed according to following standards:

ETSI EN 301 489-1 V2.2.3 (2019-11)	ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements; Harmonised Standard for ElectroMagnetic Compatibility
---------------------------------------	---

ETSI EN 301 489-17 V3.2.4 (2020-09)	ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 17: Specific conditions for Broadband Data Transmission Systems; Harmonised Standard for ElectroMagnetic Compatibility
--	--



3.5 Test Facility

The test facility has a test site registered with the following organizations:

- **ISED – Registration No.: 21895**

Waltek Testing Group (Foshan) Co., Ltd. has been registered and fully described in a report filed with the Innovation, Science and Economic Development Canada (ISED). The acceptance letter from the ISED is maintained in our files. Registration ISED number: 21895, March 12, 2019

- **FCC – Registration No.: 820106**

Waltek Testing Group (Foshan) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 820106, August 16, 2018

- **NVLAP – Lab Code: 600191-0**

Waltek Testing Group (Foshan) Co., Ltd. EMC Laboratory is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 600191-0.

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

3.6 Subcontracted

Whether parts of tests for the product have been subcontracted to other labs:

☐ Yes ☒ No

If Yes, list the related test items and lab information:

Test items: ---

Lab information: ---

3.7 Abnormalities from Standard Conditions

None.



4 Equipment Used during Test

4.1 Equipment List

☐ Mains Terminal Disturbance Voltage 1#(Conducted Emission)						
Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1.	EMI Test Receiver	R&S	ESR3	102423	2024-01-05	2025-01-04
2.	LISN	R&S	ENV216	101343	2024-01-05	2025-01-04
3.	Cable	HUBER+SUHNER	CBL2-NN-6M	223NN624	2024-01-04	2025-01-03
4.	Switch	CD	RSU-A4 18G	RSUA4008	2024-01-04	2025-01-03
☒ Mains Terminal Disturbance Voltage 2#(Conducted Emission)						
Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1.	EMI Test Receiver	R&S	ESCI	101178	2024-01-06	2025-01-05
2.	LISN	R&S	ENV216	101215	2024-01-05	2025-01-04
3.	Cable	HUBER+SUHNER	CBL2-NN-6M	6102701	2024-01-04	2025-01-03
4.	Switch	ESE	RSU/M2	---	2024-01-04	2025-01-03
☐ Mains Terminal Disturbance Voltage 3#(Conducted Emission)						
Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1.	EMI Test Receiver	R&S	ESR3	102842	2024-01-05	2025-01-04
2.	LISN	R&S	ENV216	101542	2024-01-05	2025-01-04
3.	Cable	YIHENG	LMR195UF-NMNM-2.5	---	2024-01-04	2025-01-03
4.	Manual RF Switch	YIHENG	SW-2	RSU0402	2024-01-04	2025-01-03
☒ Radiated Emission (30MHz to 1GHz) 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1.	3m Semi-anechoic Chamber	CHANGCHUANG	9m×6m×6m	-	2024-01-06	2025-01-05
2.	EMI Test Receiver	R&S	ESR7	101566	2024-01-06	2025-01-05
3.	Trilog Broadband Antenna	SCHWARZBECK	VULB 9162	9162-117	2023-03-16	2024-03-15
4.	Coaxial Cable (below 1GHz)	H+S	CBL3-NN-12+3m	214NN320	2024-01-06	2025-01-05
☐ Radiated Emission (30MHz to 1GHz) 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1.	3m Semi-anechoic Chamber	YIHENG	9m×6m×6m	YH2021071801	2024-01-06	2025-01-05
2.	EMI Test Receiver	R&S	ESR7	102454	2024-01-06	2025-01-05
3.	Trilog Broadband Antenna	SCHWARZBECK	VULB 9163	01418	2023-03-16	2024-03-15
4.	Coaxial Cable (below 1GHz)	Times-Microwave Systems	LMR240UF-NMSM-7.5	-	2024-01-06	2025-01-05
☒ Radiated Emission (1GHz to 6GHz) 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1.	3m Semi-anechoic	CHANGCHUANG	9m×6m×6m	-	2024-01-05	2025-01-04



	Chamber					
2.	EMI Test Receiver	R&S	ESR7	101566	2024-01-06	2025-01-05
3.	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	01561	2024-01-05	2025-01-04
4.	Coaxial Cable (above 1GHz)	Times-Microwave	CBL5-NN	-	2024-01-04	2025-01-03
5.	Preamplifier	Lunar E M	LNA1G18-40	20160501002	2024-01-04	2025-01-03
☐ Radiated Emission (1GHz to 6GHz) 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1.	3m Semi-anechoic Chamber	YIHENG	9m×6m×6m	YH2021071801	2024-01-06	2025-01-05
2.	EMI Test Receiver	R&S	ESR7	102454	2024-01-06	2025-01-05
3.	Broad-band Horn Antenna	SCHWARZBECK	BBHA9120D	02465	2024-01-05	2025-01-04
4.	Coaxial Cable (above 1GHz)	Times-Microwave Systems	SFT205-NMSM-7	-	2024-01-06	2025-01-05
5.	Preamplifier	Tonscend	TAP0118045	AP21J806168	2024-01-05	2025-01-04
☐ Harmonics and Flicker Measuring System						
Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1.	Harmonics and Flicker Measuring System	YUANFANG	HFM-3000	V200	2024-02-28	2025-02-27
☒ ESD						
Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1.	ESD Simulator	TESEQ	NSG437	521	2024-01-03	2025-01-02
☒ EFT & Voltage Dips and Interruptions						
Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1.	EMS test system	TESEQ	NSG3040	1858	2024-01-06	2025-01-05
☒ Surge						
Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1.	Surge Simulator	TESEQ	NSG3060	1395	2024-01-05	2025-01-04
☒ Injected Currents						
Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1.	Conducted Immunity test system	TESEQ	NSG4070	45345	2024-01-05	2025-01-04
2.	CDN	TESEQ	CDN M016	31586	2024-01-05	2025-01-04
3.	6dB Attenuator	TESEQ	ATN6075	32122	2024-01-05	2025-01-04
☒ Radio-frequency electromagnetic fields						
Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1.	RF Power Amplifier	OPHIR	5225R	1051/1712	2024-01-05	2025-01-04
2.	RF Power Amplifier	OPHIR	5293RE	1051/171	2024-01-05	2025-01-04
3.	Stacked double logarithmic periodic antenna	SCHWARZBECK	STLP9128E-SPECIAL	142	2024-01-05	2025-01-04



4.	Stacked double logarithmic periodic antenna	SCHWARZBECK	STLP 9149	476	2024-01-05	2025-01-04
5.	Analog signal generator	RS	SMB100A	105566	2024-01-04	2025-01-03
6.	Power meter	RS	NRP6A	101133	2024-01-05	2025-01-04
7.	Power meter	RS	NRP6A	101134	2024-01-05	2025-01-04

☐: Not Used

☒: Used

4.2 Software List

Description	Manufacturer	Model	Version
EMI Test Software (Conducted Emission 1#)	FARATRONIC	EZ-EMC	EMEC-3A1
EMI Test Software (Conducted Emission 2#)	FARATRONIC	EZ-EMC	CON-03A1
EMI Test Software (Conducted Emission 3#)	FARATRONIC	EZ-EMC	COM 3A1.1
EMI Test Software (Radiated Emission 1#)	FARATRONIC	EZ-EMC	RA-03A1-1
EMI Test Software (Radiated Emission 2#)	FARATRONIC	EZ-EMC	RA-03A1-1
Harmonics and Flicker Test Software	YUANFANG	HFM-3000	V2.00.120
Radiated Immunity Test Software	TONSCEND	JS35-RS	V2.0.1.7

4.3 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Conducted Emission	150kHz~30MHz	±2.6dB	(1)
Radiated Emission	30MHz~1GHz	±4.5dB	(1)
Radiated Emission	1GHz~6GHz	±4.5dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



4.4 Special Accessories and Auxiliary Equipment

Item	Equipment	Technical Data	Manufacturer	Model No.
1.	AC Adapter	Input: AC 100-240V~, 50/60Hz, 0.5A Output: DC 5V, 2A or DC 9V, 2A	HUAWEI	HW-090200CH0

4.5 Decision Rule

Compliance or non-compliance with a disturbance limit shall be determined in the following manner.

If U_{LAB} is less than or equal to U_{cispr} , then

- Compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- Non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{LAB} is greater than U_{cispr} , then

- Compliance is deemed to occur if no measured disturbance level, increased by $(U_{LAB} - U_{cispr})$, exceeds the disturbance limit;
- Non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{LAB} - U_{cispr})$, exceeds the disturbance limit.

WALTEK



5 EMC Requirements for Emissions

5.1 Conducted Emission

Test Requirement	ETSI EN 301 489-17
Test Method	ETSI EN 301 489-1, EN 55032 Class B
Frequency Range	150kHz to 30MHz
Class/Severity	Class B/ Table A.10 of EN 55032
Ports	AC Mains
Detector	Peak for pre-scan (9kHz Resolution Bandwidth)

5.1.1 E.U.T. Operation

Operating Environment:


Temperature	24.8°C
Humidity	49.3%RH
Atmospheric Pressure	101.2kPa

EUT Operation:

Input Voltage	AC 240V/50Hz
Operating Mode	Communication mode

5.1.2 Test Setup

The conducted emission tests were performed using the setup accordance with the EN 55032.

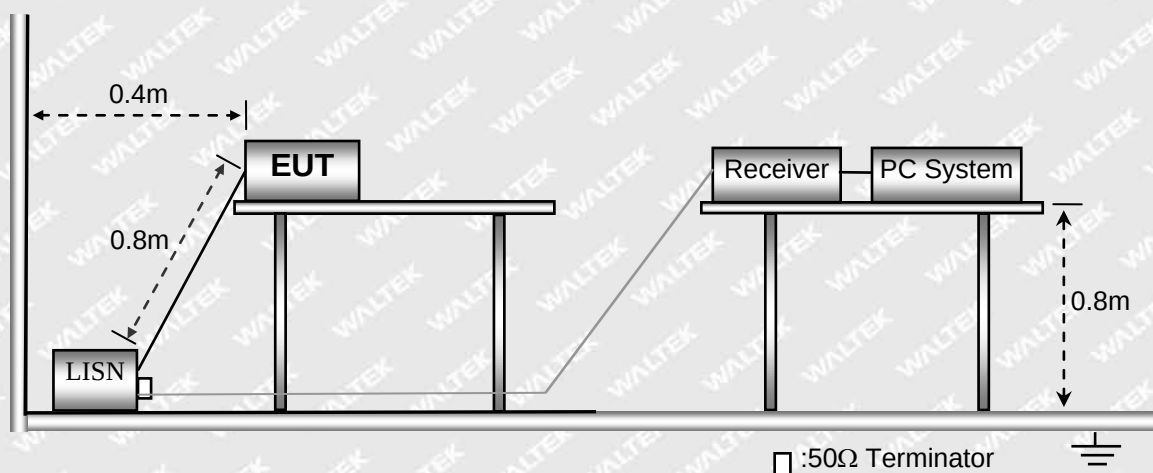



5.1.3 Corrected Amplitude & Margin Calculation

The Corrected factor is calculated by adding LISN VDF(Voltage Division Facotr), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Measurement} = \text{Reading Level} + \text{Correct Factor}$$


$$\text{Correct Facotor} = \text{LISN VDF} + \text{Cable Loss}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Measurement} - \text{Limit}$$

5.1.4 Test Result

Live Line

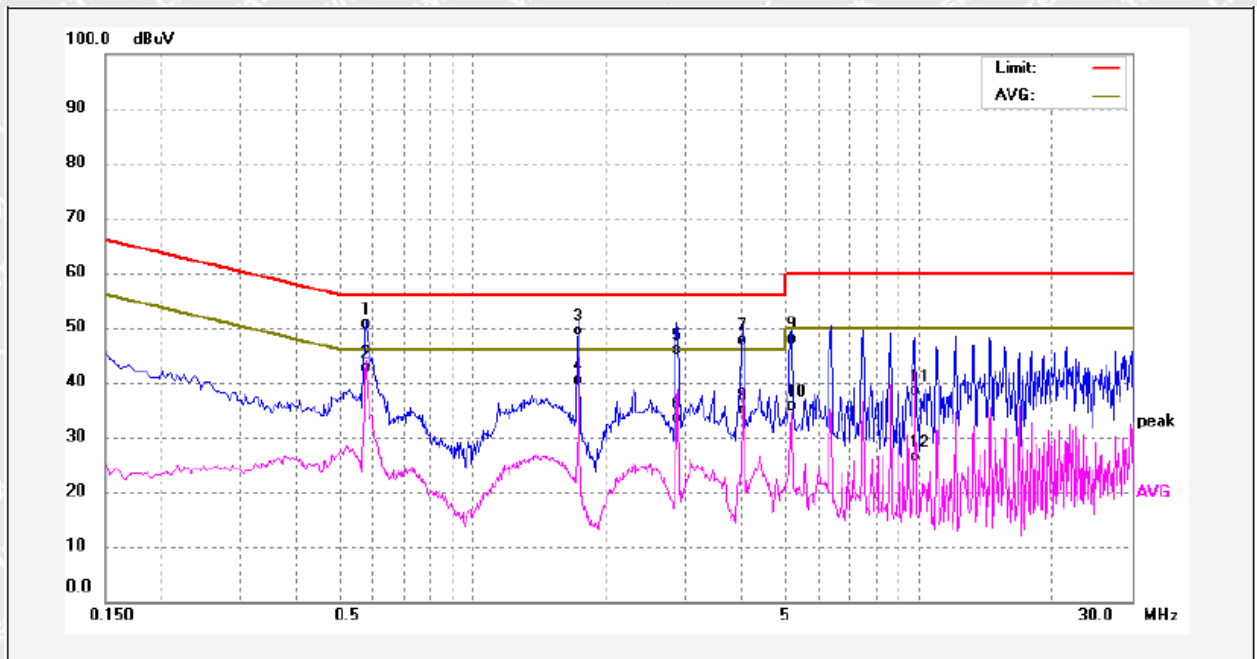

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.5780	40.96	9.66	50.62	56.00	-5.38	QP	
2	0.5780	32.96	9.66	42.62	46.00	-3.38	AVG	
3	1.7340	39.66	9.71	49.37	56.00	-6.63	QP	
4	1.7340	30.73	9.71	40.44	46.00	-5.56	AVG	
5	2.8780	36.02	9.78	45.80	56.00	-10.20	QP	
6	2.8780	23.58	9.78	33.36	46.00	-12.64	AVG	
7	4.0420	37.89	9.83	47.72	56.00	-8.28	QP	
8	4.0420	25.10	9.83	34.93	46.00	-11.07	AVG	
9	5.1979	38.04	9.89	47.93	60.00	-12.07	QP	
10	5.1979	25.73	9.89	35.62	50.00	-14.38	AVG	
11	9.8260	28.44	10.06	38.50	60.00	-21.50	QP	
12	9.8260	16.22	10.06	26.28	50.00	-23.72	AVG	

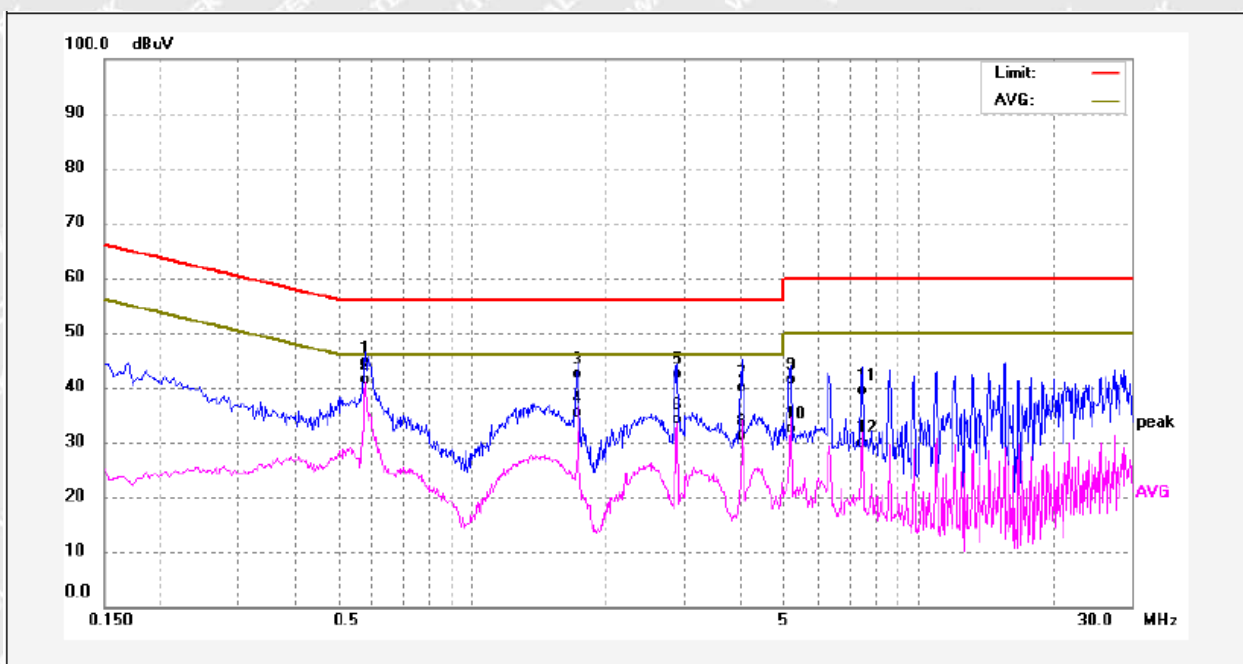**Neutral Line**

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.5780	34.83	9.59	44.42	56.00	-11.58	QP	
2	0.5780	31.72	9.59	41.31	46.00	-4.69	AVG	
3	1.7300	32.75	9.63	42.38	56.00	-13.62	QP	
4	1.7300	25.63	9.63	35.26	46.00	-10.74	AVG	
5	2.8860	32.67	9.69	42.36	56.00	-13.64	QP	
6	2.8860	24.46	9.69	34.15	46.00	-11.85	AVG	
7	4.0380	30.07	9.74	39.81	56.00	-16.19	QP	
8	4.0380	21.33	9.74	31.07	46.00	-14.93	AVG	
9	5.1940	31.46	9.80	41.26	60.00	-18.74	QP	
10	5.1940	22.68	9.80	32.48	50.00	-17.52	AVG	
11	7.4940	29.50	9.89	39.39	60.00	-20.61	QP	
12	7.4940	19.98	9.89	29.87	50.00	-20.13	AVG	



5.2 Radiated Emission

Test Requirement	ETSI EN 301 489-17
Test Method	ETSI EN 301 489-1, EN 55032, Class B
Frequency Range	30MHz to 1GHz, 1GHz to 6GHz
Class/Severity	Class B/ Table A.4 and A.5 of EN 55032
Detector	Peak for pre-scan (120kHz Resolution Bandwidth Below 1GHz; 1MHz Resolution Bandwidth Above 1GHz)

5.2.1 EUT Operation:

Operating Environment:

Temperature	23.3°C
Humidity	51.3%RH
Atmospheric Pressure	101.2kPa


EUT Operation:

Input Voltage	AC 240V/50Hz for mode 1; Battery 3.7V for mode 2
Operating Mode	Mode 1: Communication mode with AC input Mode 2: Communication mode with battery operated

5.2.2 Test Setup


The radiated emission tests were performed using the setup accordance with the EN 55032.

Frequency Range: Below 1 GHz

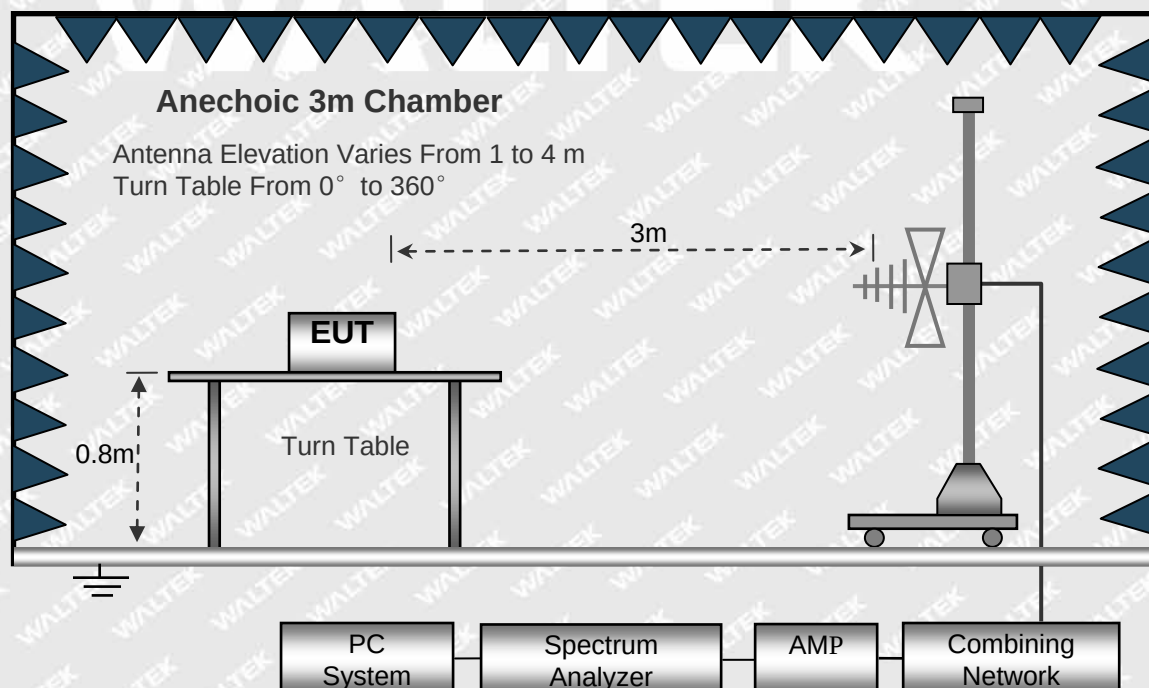



Frequency Range: Above 1 GHz

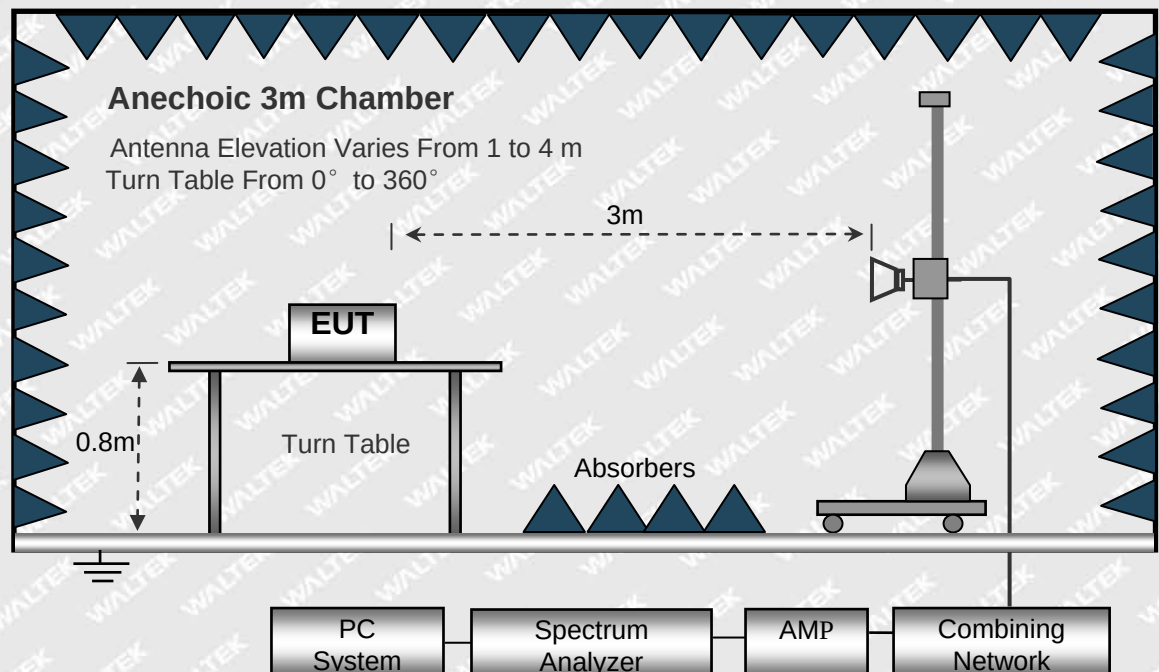

5.2.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Corr. Factor}$$

$$\text{Corr. Factor} = \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit.

The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$




5.2.4 Test Result

Communication mode with AC input

Frequency Range: 30MHz ~ 1000MHz


Antenna Polarization: Vertical

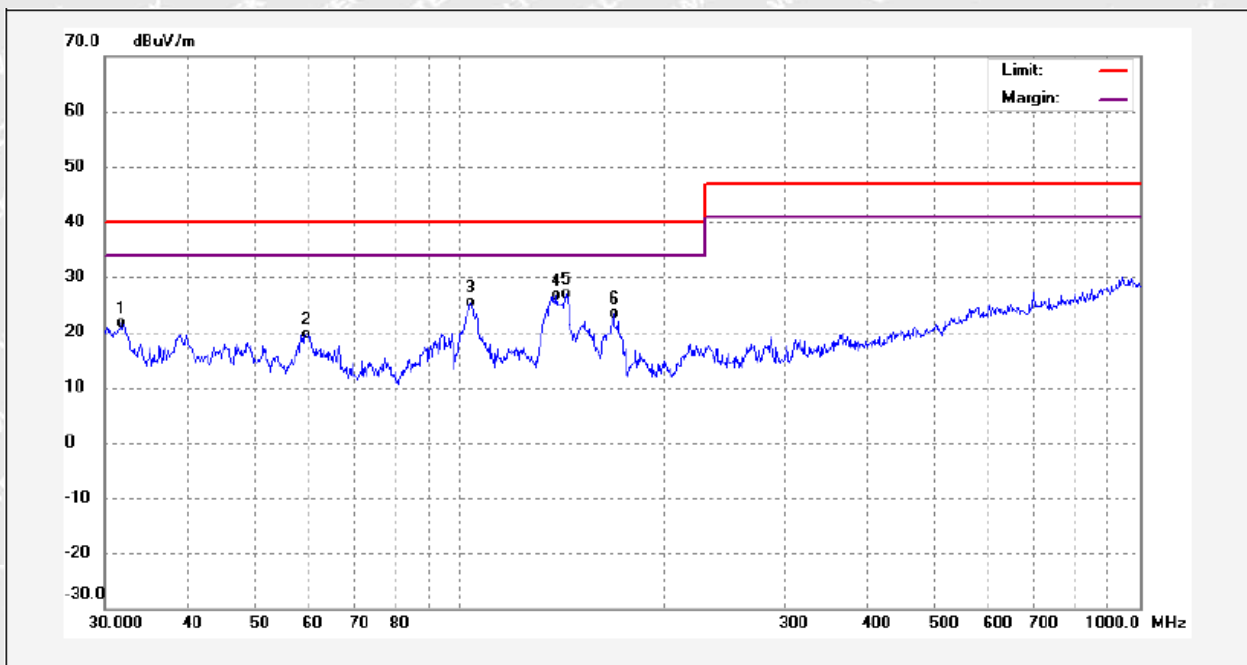

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	31.8986	9.38	12.24	21.62	40.00	-18.38	QP	
2	59.5657	5.63	13.96	19.59	40.00	-20.41	QP	
3	103.9876	12.34	12.93	25.27	40.00	-14.73	QP	
4	139.2147	17.38	9.15	26.53	40.00	-13.47	QP	
5	143.5775	17.79	9.14	26.93	40.00	-13.07	QP	
6	168.4728	12.82	10.60	23.42	40.00	-16.58	QP	




Antenna Polarization: Horizontal

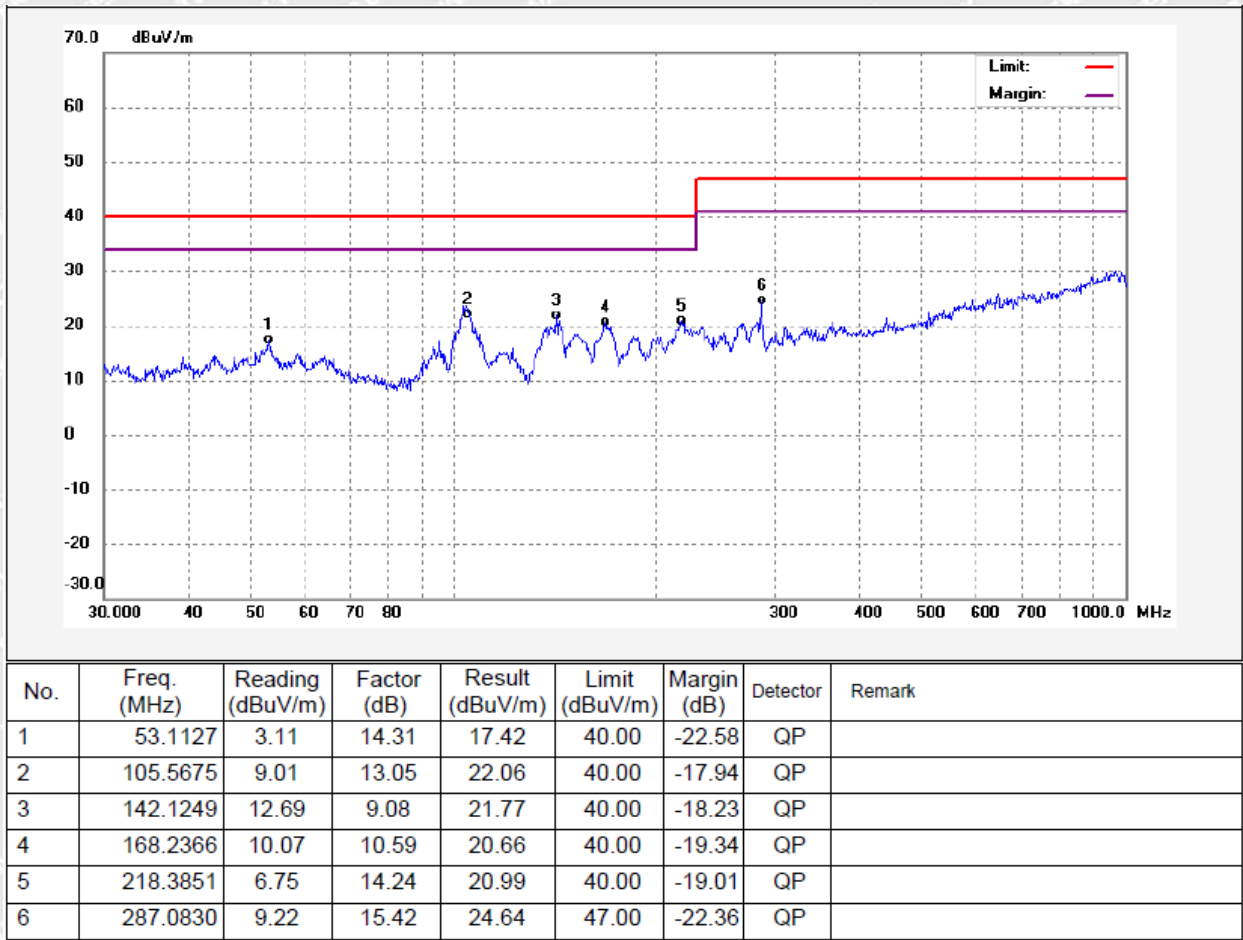

**Frequency Range: 1000MHz ~ 6000MHz**


Antenna Polarization: Vertical

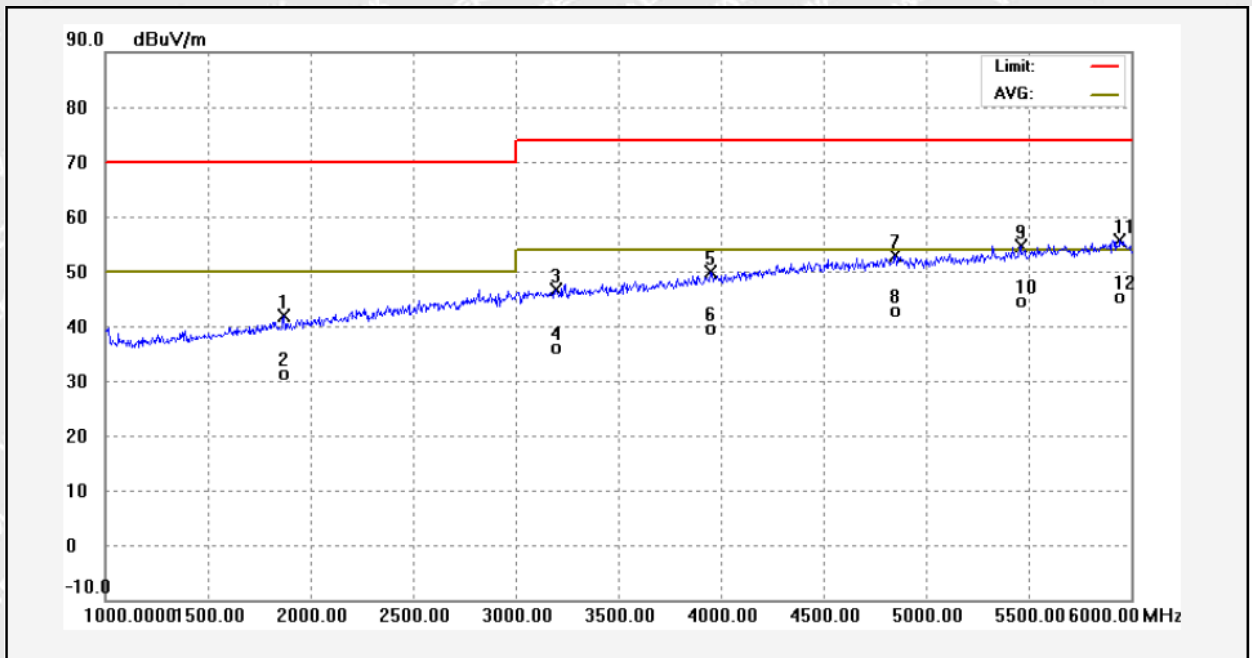

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	1871.500	11.95	29.87	41.82	70.00	-28.18	peak	
2	1871.500	1.55	29.87	31.42	50.00	-18.58	AVG	
3	3195.500	12.16	34.53	46.69	74.00	-27.31	peak	
4	3195.500	1.69	34.53	36.22	54.00	-17.78	AVG	
5	3951.000	13.40	36.47	49.87	74.00	-24.13	peak	
6	3951.000	3.08	36.47	39.55	54.00	-14.45	AVG	
7	4851.500	13.98	38.99	52.97	74.00	-21.03	peak	
8	4851.500	3.77	38.99	42.76	54.00	-11.24	AVG	
9	5462.000	14.61	40.04	54.65	74.00	-19.35	peak	
10	5462.000	4.54	40.04	44.58	54.00	-9.42	AVG	
11	5948.000	14.88	40.85	55.73	74.00	-18.27	peak	
12	5948.000	4.41	40.85	45.26	74.00	-28.74	QP	



Antenna Polarization: Horizontal

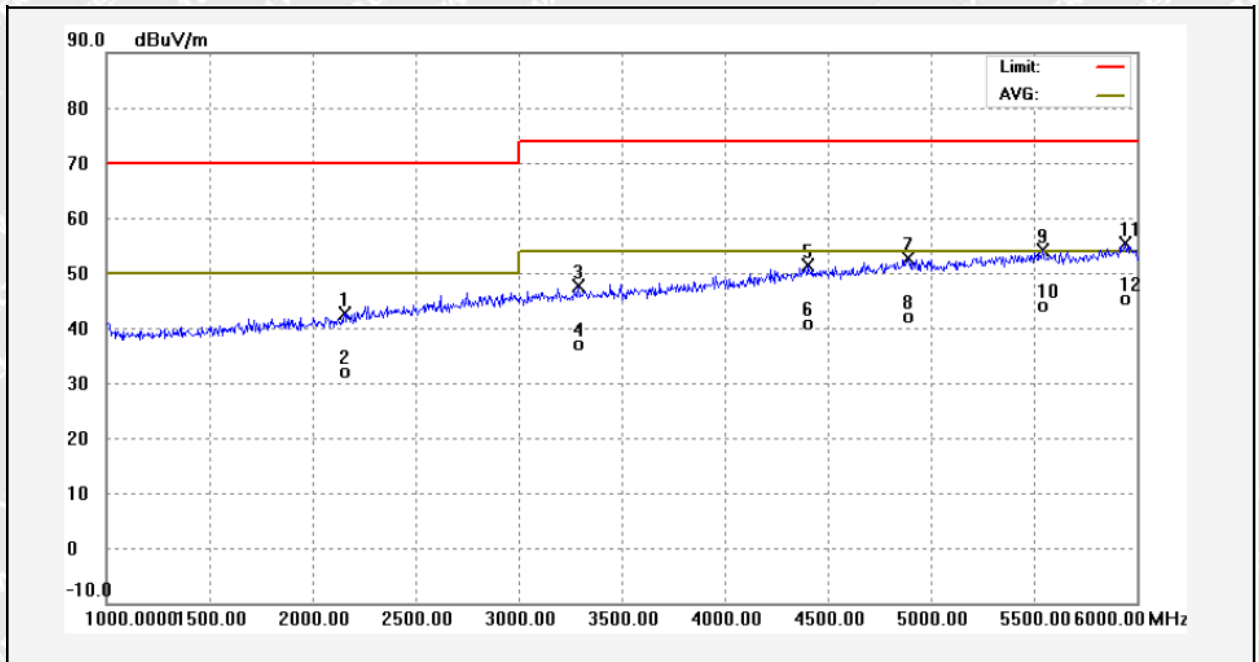


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2158.500	11.32	31.30	42.62	70.00	-27.38	peak	
2	2158.500	0.75	31.30	32.05	50.00	-17.95	AVG	
3	3293.500	13.05	34.49	47.54	74.00	-26.46	peak	
4	3293.500	2.75	34.49	37.24	54.00	-16.76	AVG	
5	4409.000	13.99	37.37	51.36	74.00	-22.64	peak	
6	4409.000	3.55	37.37	40.92	54.00	-13.08	AVG	
7	4893.000	14.01	38.71	52.72	74.00	-21.28	peak	
8	4893.000	3.50	38.71	42.21	54.00	-11.79	AVG	
9	5548.500	14.35	39.83	54.18	74.00	-19.82	peak	
10	5548.500	4.37	39.83	44.20	54.00	-9.80	AVG	
11	5947.500	14.38	40.89	55.27	74.00	-18.73	peak	
12	5947.500	4.48	40.89	45.37	54.00	-8.63	AVG	



Communication mode with battery operated


Frequency Range: 30MHz ~ 1000MHz

Antenna Polarization: Vertical

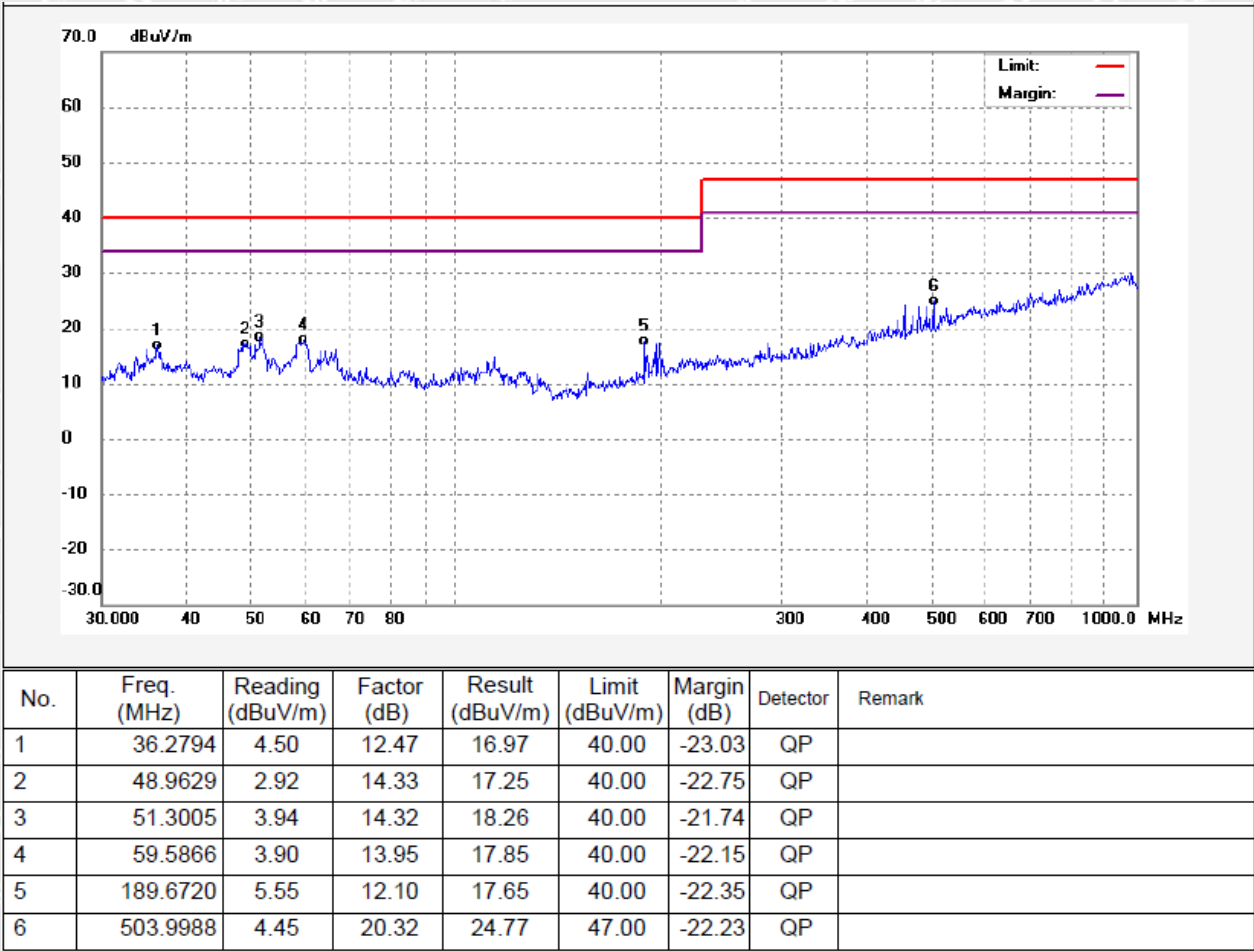




Antenna Polarization: Horizontal

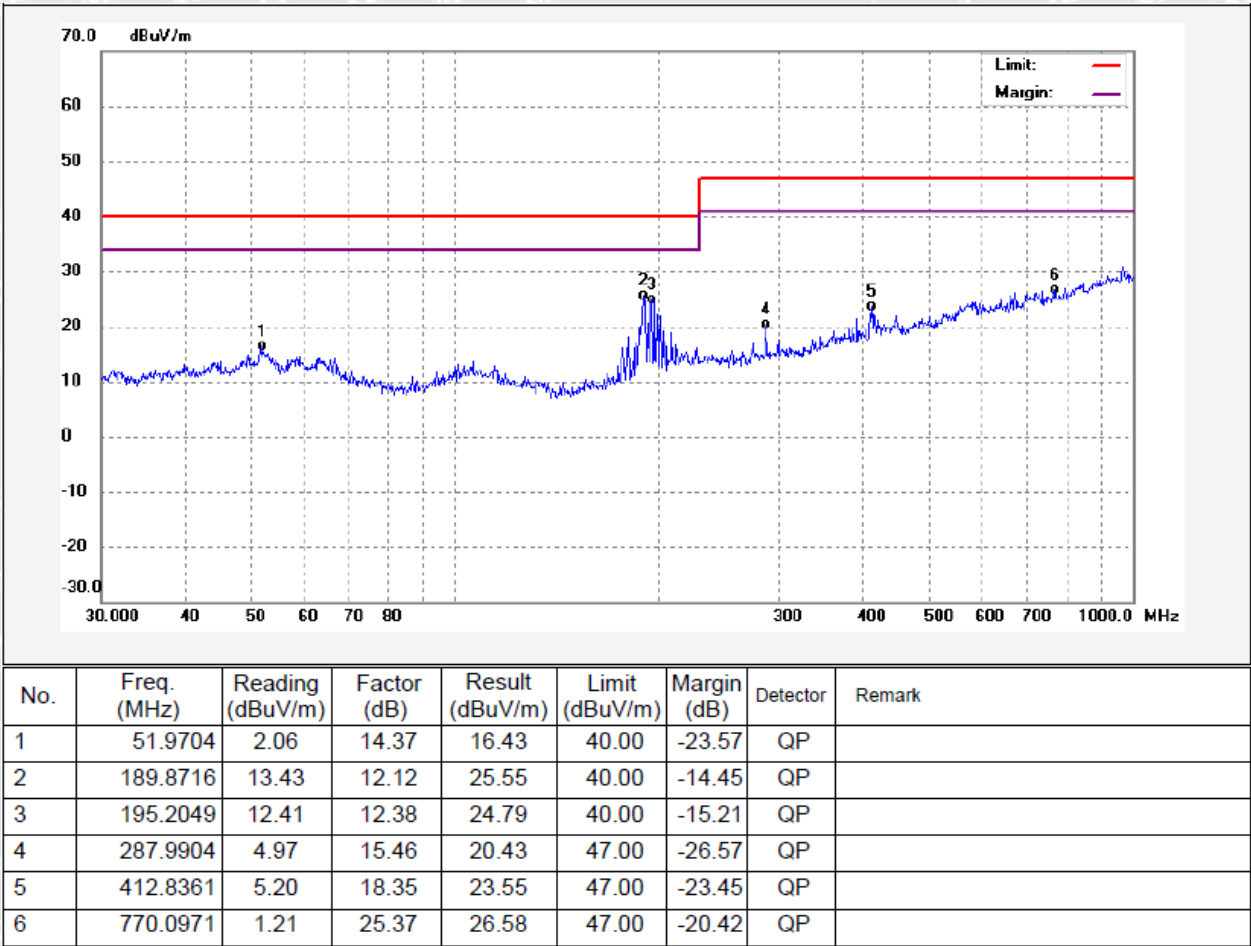

**Frequency Range: 1000MHz ~ 6000MHz**


Antenna Polarization: Vertical

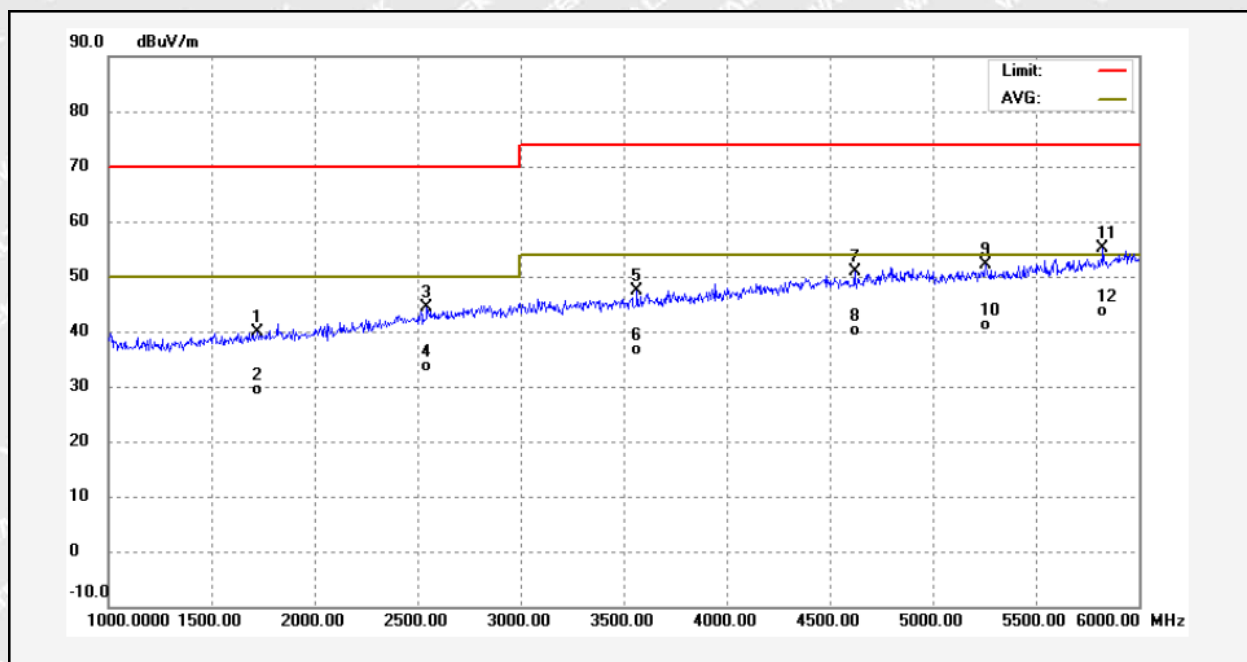

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	1727.000	9.60	30.20	39.80	70.00	-30.20	peak	
2	1727.000	-0.77	30.20	29.43	50.00	-20.57	AVG	
3	2545.500	11.66	32.81	44.47	70.00	-25.53	peak	
4	2545.500	0.81	32.81	33.62	50.00	-16.38	AVG	
5	3565.500	12.51	34.89	47.40	74.00	-26.60	peak	
6	3565.500	1.84	34.89	36.73	54.00	-17.27	AVG	
7	4624.000	13.03	37.79	50.82	74.00	-23.18	peak	
8	4624.000	2.26	37.79	40.05	54.00	-13.95	AVG	
9	5257.000	12.96	39.21	52.17	74.00	-21.83	peak	
10	5257.000	2.02	39.21	41.23	54.00	-12.77	AVG	
11	5829.500	14.69	40.47	55.16	74.00	-18.84	peak	
12	5829.500	3.20	40.47	43.67	54.00	-10.33	AVG	



Antenna Polarization: Horizontal

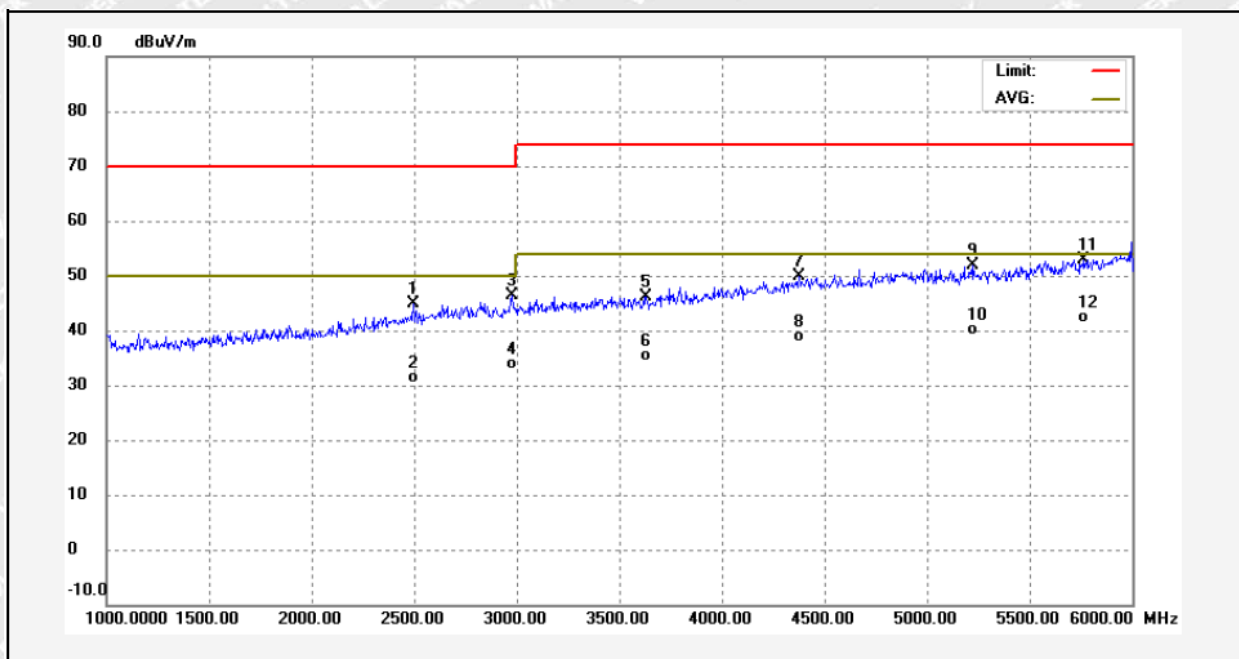

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2499.000	12.15	32.70	44.85	70.00	-25.15	peak	
2	2499.000	-1.40	32.70	31.30	50.00	-18.70	AVG	
3	2975.000	12.49	33.83	46.32	70.00	-23.68	peak	
4	2975.000	0.04	33.83	33.87	50.00	-16.13	AVG	
5	3634.000	11.14	35.05	46.19	74.00	-27.81	peak	
6	3634.000	0.41	35.05	35.46	54.00	-18.54	AVG	
7	4378.000	12.70	37.09	49.79	74.00	-24.21	peak	
8	4378.000	1.83	37.09	38.92	54.00	-15.08	AVG	
9	5225.500	12.66	39.15	51.81	74.00	-22.19	peak	
10	5225.500	0.96	39.15	40.11	54.00	-13.89	AVG	
11	5765.000	12.63	40.31	52.94	74.00	-21.06	peak	
12	5765.000	2.12	40.31	42.43	54.00	-11.57	AVG	



6 EMC Requirement for Immunity

6.1 Performance Criteria

6.1.1 General performance criteria

The performance criteria are:

- performance criteria A for immunity tests with phenomena of a continuous nature;
- performance criteria B for immunity tests with phenomena of a transient nature;
- performance criteria C for immunity tests with power interruptions exceeding a certain time.

6.1.2 Performance table

Criteria	During test	After test
A	Shall operate as intended. (See note). Shall be no loss of function. Shall be no unintentional transmissions.	Shall operate as intended. Shall be no degradation of performance. Shall be no loss of function. Shall be no loss of critical stored data.
B	May be loss of function.	Functions shall be self-recoverable. Shall operate as intended after recovering. Shall be no loss of critical stored data.
C	May be loss of function.	Functions shall be recoverable by the operator. Shall operate as intended after recovering. Shall be no loss of critical stored data.

WALTEK



6.2 Electrostatic Discharge(ESD)

Test Requirement	ETSI EN 301 489-17
Test Method	ETSI EN 301 489-1, EN 61000-4-2
Discharge Impedance	330 Ω / 150 pF
Discharge Voltage	Air Discharge: +/-2,4,8 KV Contact Discharge: +/-2,4 kV HCP & VCP: +/-2,4 kV
Polarity	Positive & Negative
Discharge Repeat Times	At Least 20 times at each test point
Discharge Mode	Single Discharge
Discharge Period	1 second minimum

6.2.1 E.U.T. Operation

Operating Environment:


Temperature	23.1°C
Humidity	52.8%RH
Atmospheric Pressure	100.6kPa

EUT Operation:

Input Voltage	AC 230V/50Hz for mode 1; Battery 3.7V for mode 2
Operating Mode	Mode 1: Communication mode with AC input Mode 2: Communication mode with battery operated

6.2.2 Block Diagram of Setup

The ESD test was performed in accordance with the EN 61000-4-2.

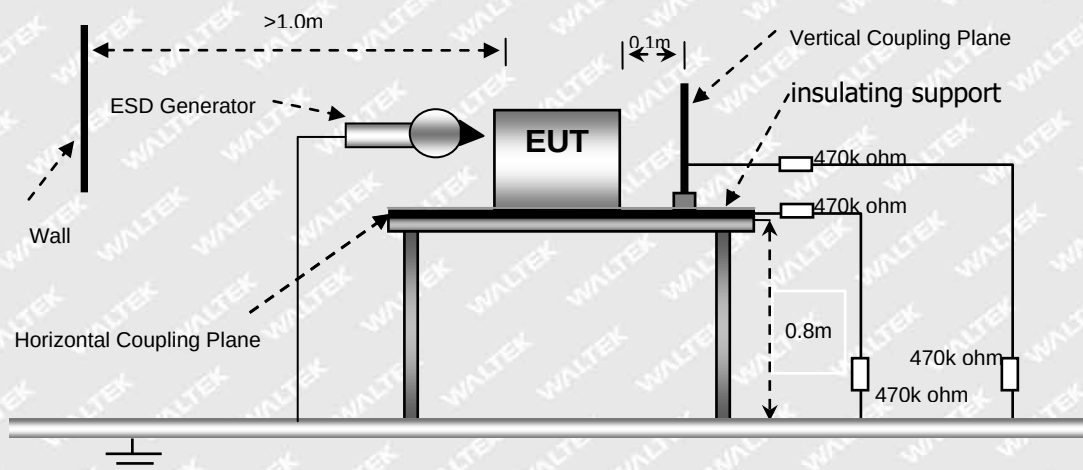



6.2.3 Test Result

Direct Discharge			Performance Criteria	
Discharge Level (kV)	Performance Criterion	Test Point	Contact Discharge	Air Discharge
$\pm 2 / \pm 4 / \pm 8$	B	1	N/A	Pass*
$\pm 2 / \pm 4$	B	2	Pass*	N/A

Remark:

Test points 1. All Exposed Surface & Seams; 2. All metallic part

* During the test no deviation was detected to the selected operation mode(s)

Indirect Discharge			Performance Criteria	
Discharge Level (kV)	Performance Criterion	Test Point	Horizontal Coupling	Vertical Coupling
$\pm 2 / \pm 4$	B	1	Pass*	Pass*

Remark:

Test points 1. All sides

* During the test no deviation was detected to the selected operation mode(s)

WALTEK

6.3 RF Electromagnetic Field (80MHz to 6 000MHz) (RS)

Test Requirement : ETSI EN 301 489-17

Test Method : ETSI EN 301 489-1, EN 61000-4-3

Face of EUT..... : Front, Back, Left, Right

Frequency Range : 80MHz to 6 000MHz

Test Level : 3V/m

Modulation : 80%, 1kHz Amplitude Modulation.

Antenna polarisation..... : Horizontal& Vertical

6.3.1 E.U.T. Operation

Operating Environment:

Temperature..... : 21.7°C

Humidity : 51.4%RH

Atmospheric Pressure : 99.2kPa


EUT Operation:

Input Voltage..... : AC 230V/50Hz for mode 1; Battery 3.7V for mode 2

Operating Mode : Mode 1: Communication mode with AC input
Mode 2: Communication mode with battery operated

6.3.2 Block Diagram of Setup

The Radiated Immunity test was performed in accordance with the EN 61000-4-3.

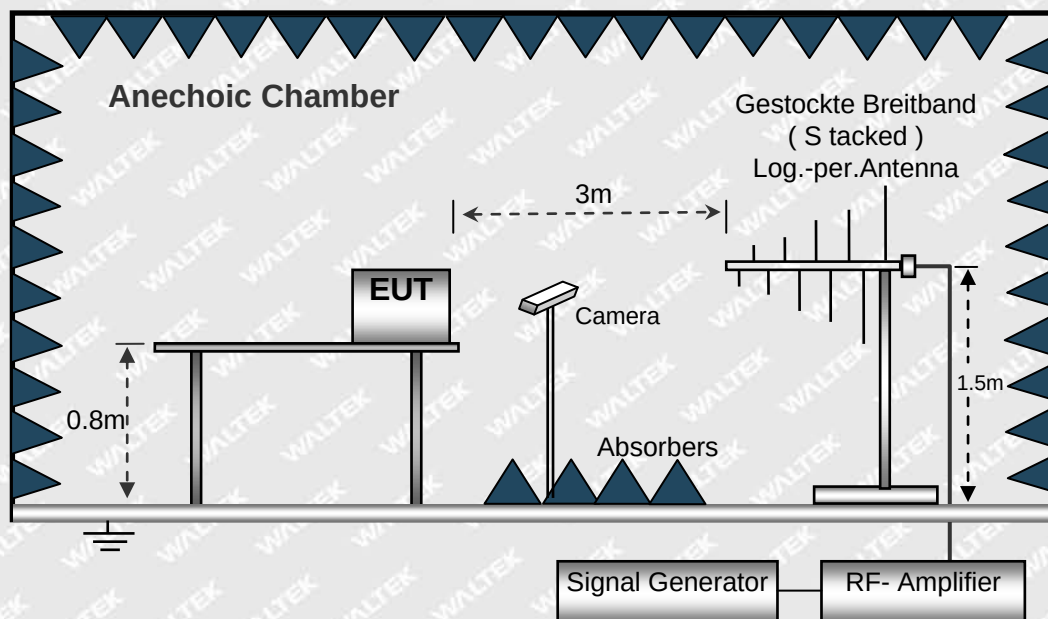



6.3.3 Test Result

Frequency	Face of EUT	Antenna polarisation	Test Level	Step Size	Dwell Time	Performance Criterion	Result
80MHz to 1000MHz	Front, Back, Left, Right	Horizontal	3V/m	1%	1s	A	Pass*
80MHz to 1000MHz	Front, Back, Left, Right	Vertical	3V/m	1%	1s	A	Pass*
1000MHz to 6000MHz	Front, Back, Left, Right	Horizontal	3V/m	1%	1s	A	Pass*
1000MHz to 6000MHz	Front, Back, Left, Right	Vertical	3V/m	1%	1s	A	Pass*

Remark:

* During the test no deviation was detected to the selected operation mode(s)

WALTEK



6.4 Fast Transients Common Mode (EFT)

Test Requirement	: ETSI EN 301 489-17
Test Method	: ETSI EN 301 489-1, EN 61000-4-4
Polarity	: Positive & Negative
Repetition Frequency.....	: 5kHz
Burst Duration	: 300ms
Test Duration	: 2 minutes per level & polarity

6.4.1 E.U.T. Operation

Operating Environment:

Temperature.....	: 22.7°C
Humidity	: 52.5%RH
Atmospheric Pressure	: 100.3kPa


EUT Operation:

Input Voltage.....	: AC 230V/50Hz
Operating Mode	: Communication mode


6.4.2 Block Diagram of Test Setup

The Electrical Fast Transients Immunity test was performed in accordance with the EN 61000-4-4.

For AC Mains or DC Ports:

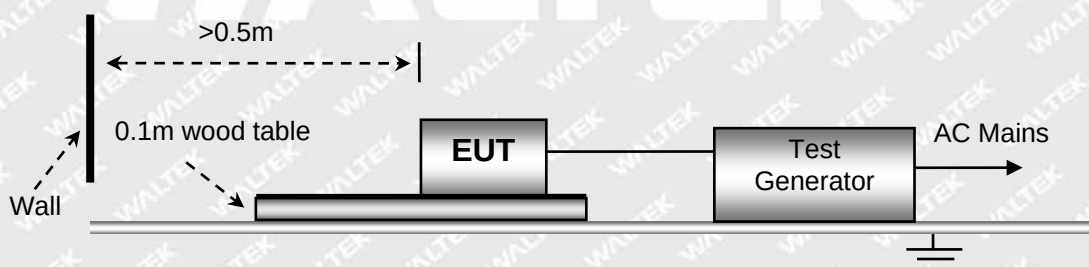

For Signal, Wired network or Control Ports:

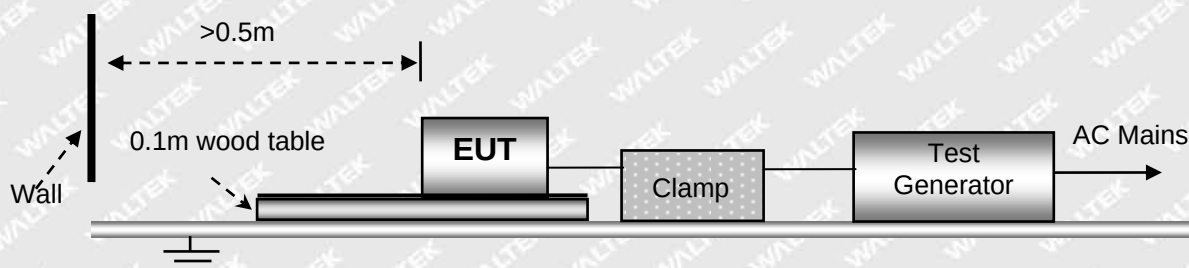



6.4.3 Test Result

Test Port	Test Level(kV)	Performance Criterion	Result
AC mains power port	±1.0	B	Pass*
DC power port	±0.5	B	N/A
Signal port	±0.5	B	N/A
Control port	±0.5	B	N/A
Wired network port	±0.5	B	N/A

Remark:

* During the test no deviation was detected to the selected operation mode(s)

WALTEK



6.5 Surges

Test Requirement : ETSI EN 301 489-17

Test Method : ETSI EN 301 489-1, EN 61000-4-5

Interval : 60s between each surge

No. of surges : 5 positive, 5 negative at 0°, 90°, 180°, 270°.

6.5.1 E.U.T. Operation

Operating Environment:

Temperature : 22.1°C

Humidity : 52.6%RH

Atmospheric Pressure : 99.8kPa

EUT Operation:


Input Voltage : AC 230V/50Hz

Operating Mode : Communication mode


6.5.2 Block Diagram of Test Setup

The Surges Immunity test was performed in accordance with the EN 61000-4-5.

For AC Mains or DC Ports:

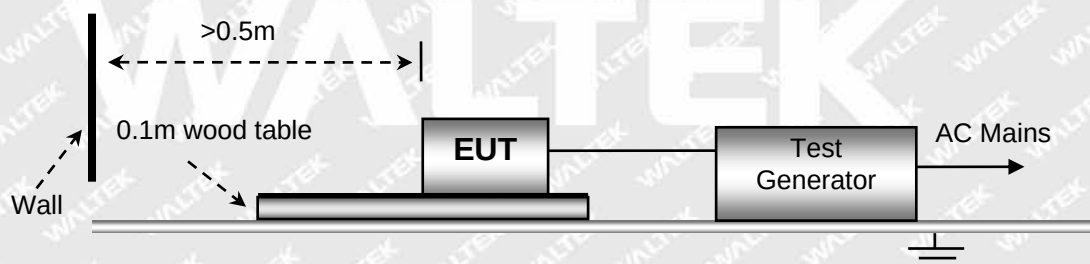

For Wired network port:

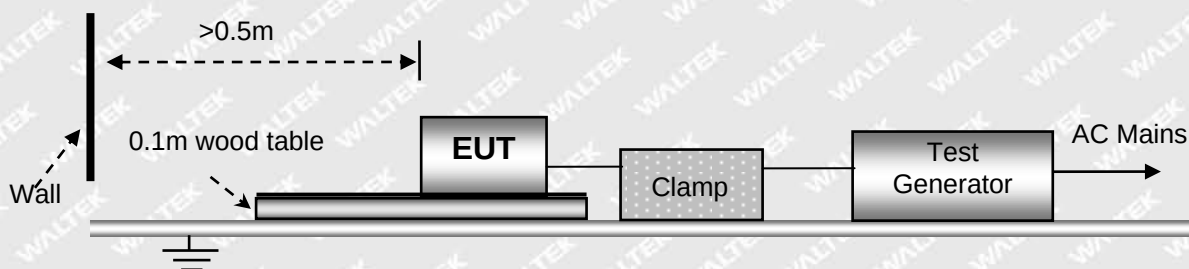



6.5.3 Test Result

Coupling point	Test Port	Applied Voltage (kV)	Performance criterion	Result
AC power port	Between Phase And Phase	±1	B	N/A
	Between Live And Neutral	±1	B	Pass*
	Between Live And Earth	±2	B	N/A
	Between Neutral And Earth	±2	B	N/A

Remark:

* During the test no deviation was detected to the selected operation mode(s)

WALTEK



6.6 RF Common Mode 0,15 MHz to 80MHz (CS)

Test Requirement : ETSI EN 301 489-17

Test Method : ETSI EN 301 489-1, EN 61000-4-6

Frequency Range : 150kHz to 80MHz

Test level : 3V rms (unmodulated emf into 150 Ω)

Modulation : 80%, 1kHz Amplitude Modulation.

6.6.1 E.U.T. Operation

Operating Environment:

Temperature..... : 23.2°C

Humidity : 53.1%RH

Atmospheric Pressure : 100.5kPa

EUT Operation:


Input Voltage..... : AC 230V/50Hz

Operating Mode : Communication mode


6.6.2 Block Diagram of Test Setup

The Injected Currents Immunity test was performed in accordance with the EN 61000-4-6.

For AC Mains or DC Ports:

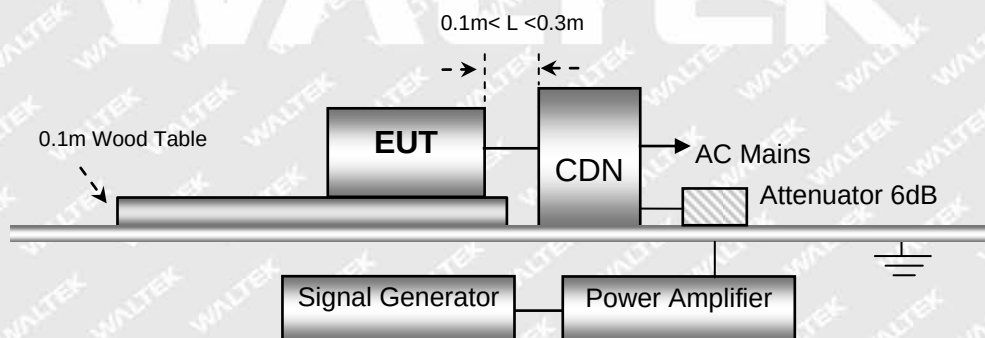

For Signal, Wired network or Control Ports:

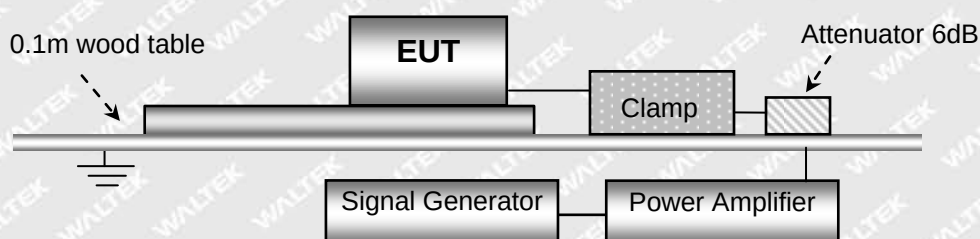



6.6.3 Test Result

Line	Voltage Level	Modulation	Step Size	Dwell Time	Performance Criteria	Test Result
AC mains power port	3Vr.m.s	80%, 1kHz Amp. Mod.	1%	1s	A	Pass*
DC power port	3Vr.m.s	80%, 1kHz Amp. Mod.	1%	1s	A	N/A
Signal port	3Vr.m.s	80%, 1kHz Amp. Mod.	1%	1s	A	N/A
Wired network port	3Vr.m.s	80%, 1kHz Amp. Mod.	1%	1s	A	N/A
Control port	3Vr.m.s	80%, 1kHz Amp. Mod.	1%	1s	A	N/A

Remark:

* During the test no deviation was detected to the selected operation mode(s)

WALTEK



6.7 Voltage Dips and Interruptions

Test Requirement : ETSI EN 301 489-17
Test Method : ETSI EN 301 489-1, EN 61000-4-11
No. of Dips / Interruptions : 3 per Level at 10ms intervals
Test Level(Voltage reduction) : 0%&70 % of U_T (Supply Voltage)

6.7.1 E.U.T. Operation

Operating Environment:


Temperature..... : 22.8°C
Humidity : 52.4%RH
Atmospheric Pressure : 100.6kPa

EUT Operation:

Input Voltage..... : AC 230V/50Hz
Operating Mode : Communication mode

6.7.2 Block Diagram of Setup

The Voltage Dips and Interruptions Immunity test was performed in accordance with the EN 61000-4-11.

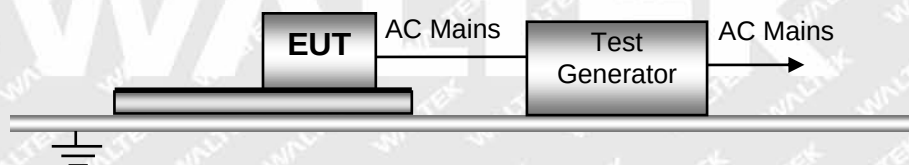

6.7.3 Test Result

Type	Test Level in % U_T	Phase	Duration	Performance criterion	Result
Voltage Dips	0	0° & 180°	0.5	B	Pass*
	0	0° & 180°	1	B	Pass*
	70	0° & 180°	25	B	Pass*
Voltage Interruption	0	0° & 180°	250	B	Pass*

Remark:


* During the test no deviation was detected to the selected operation mode(s)



7 Photographs - Test Setup

7.1 Photograph - Radiated Emissions Test Setup

Below 1000MHz

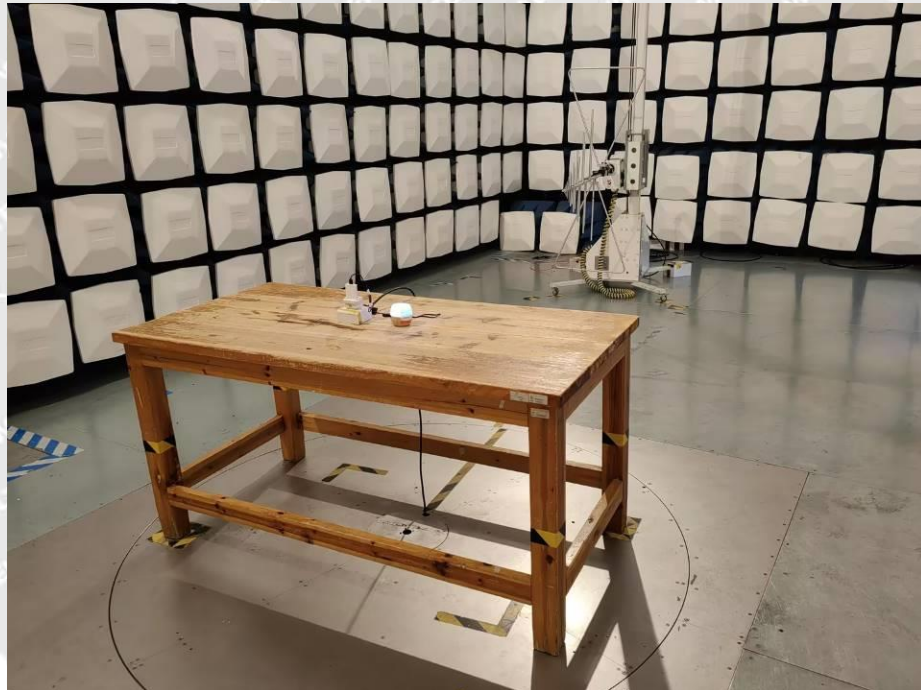

Above 1000MHz





7.2 Photograph - Conducted Emissions Test Setup




7.3 Photograph - RF Electromagnetic Field Test Setup





7.4 Photograph - ESD Test Setup

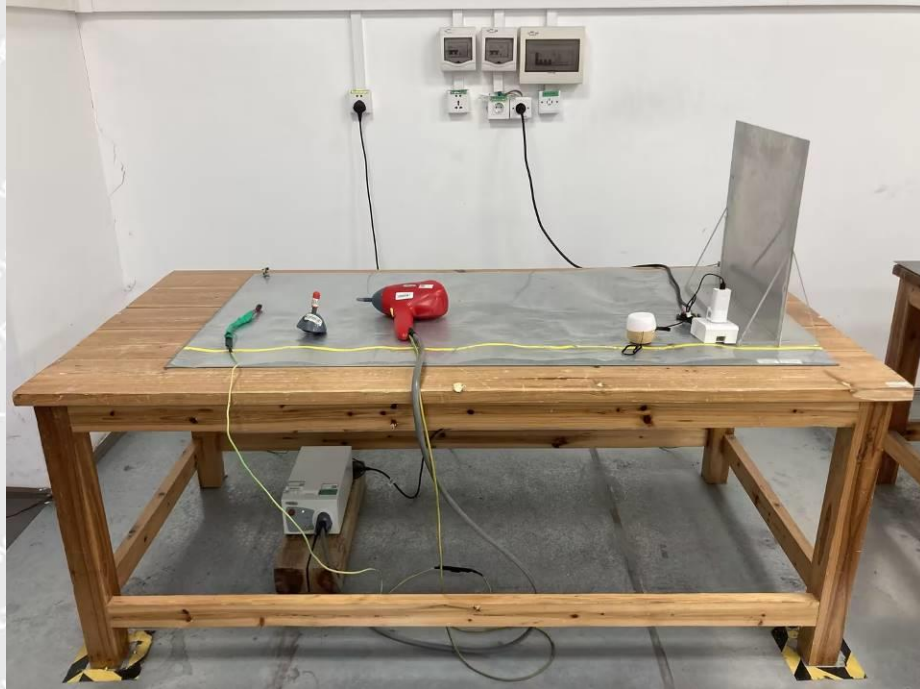


7.5 Photograph - EFT Immunity Test Setup






7.6 Photograph - Surge Immunity Test Setup

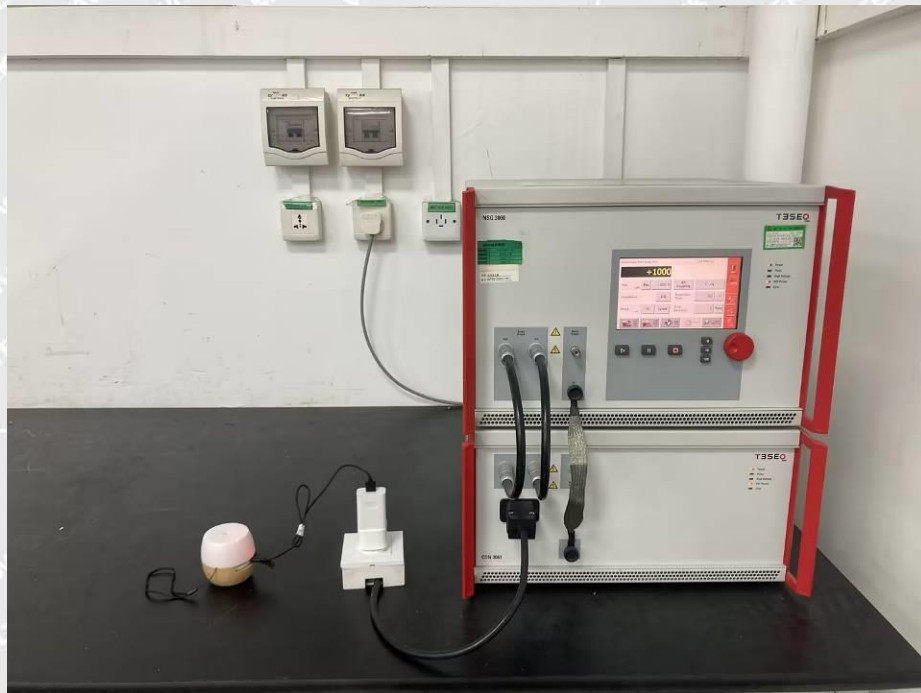

7.7 Photograph - Radio-frequency Common Mode Test Setup

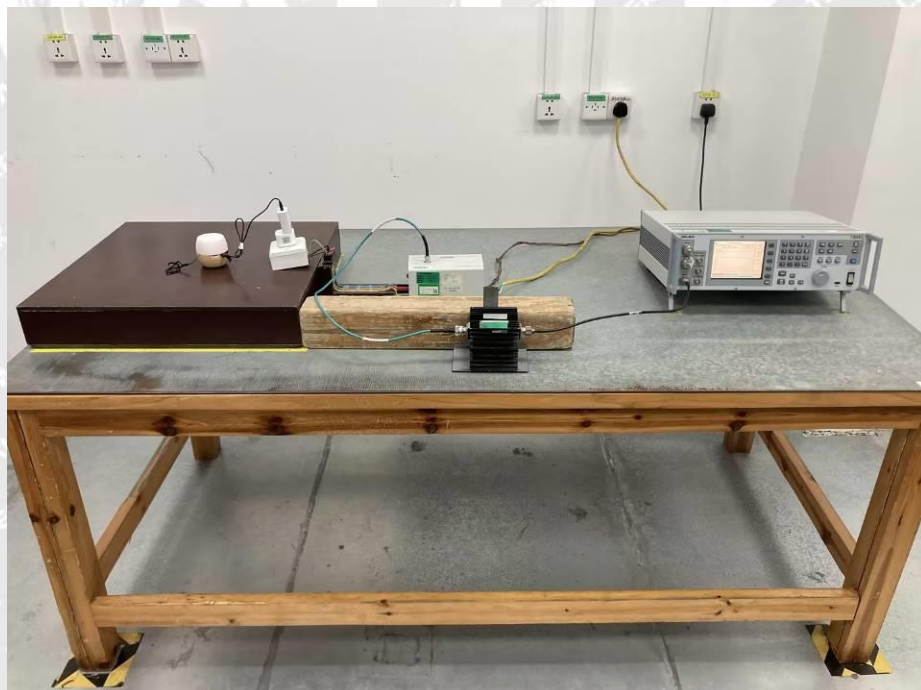



7.8 Photograph - Voltage Dips and Interruptions Immunity Test Setup



WALTEK



8 Photographs – EUT Constructional Details

Please refer to “ANNEX”.

=====End of Report=====

WALTEK



中国认可
国际互认
检测
TESTING
CNAS L6478



TEST REPORT

Reference No. : WTF24F03057625W
Applicant : Mid Ocean Brands B.V.
Address : 7/F., Kings Tower, 111 King Lam Street, Cheung Sha Wan, Kowloon,
Hong Kong
Manufacturer : 114746
Address : ---
Product Name : Wireless bamboo speaker
Model No. : MO6385
Test specification : EN 55032:2015+A11:2020+A1:2020
EN 55035:2017+A11:2020
EN IEC 55015:2019+A11:2020
EN IEC 61547:2023
Date of Receipt sample : 2024-03-21
Date of Test : 2024-03-23
Date of Issue : 2024-04-08
Test Report Form No. : WEI-55032A-04B
Test Result : Pass

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:

Waltek Testing Group (Foshan) Co., Ltd.

Address: 1/F., Building 19, Sunlink Machinery City, Xingye 4 Road,
Guanglong Industrial Park, Chihua Neighborhood Committee, Chencun Town,
Shunde District, Foshan, Guangdong, China

Tel: +86-757-23811398

Fax: +86-757-23811381

E-mail: info@waltek.com.cn

Tested by:

Roy Hong

Approved by:

Danny Zhou



1 Test Summary

EMISSION				
Test Item	Test Standard		Class / Severity	Result
Mains Terminal Disturbance Voltage	EN 55032:2015+A11:2020+A1:2020 EN IEC 55015:2019+A11:2020		Table A.10	Pass
Radiated Electromagnetic Disturbance, 9kHz to 30MHz	EN IEC 55015:2019+A11:2020		Clause 4.5.2	Pass
Radiated Emission, 30MHz to 1000MHz	EN 55032:2015+A11:2020+A1:2020 EN IEC 55015:2019+A11:2020		Table A.4	Pass
Radiation Emission, 1GHz to 6GHz	EN 55032:2015+A11:2020+A1:2020		Table A.5	Pass
IMMUNITY (EN 55035:2017+A11:2020, EN IEC 61547:2023)				
Test Item	Test Method	Class / Severity	Performance Criteria	Result
Electrostatic Discharge(ESD)	IEC 61000-4-2:2008	±4 Kv Contact ±8 Kv Air	B	Pass
Continuous RF Electromagnetic Field Disturbances	IEC 61000-4-3: 2006+A1+A2	3V/m, 80%, 1kHz, Amp. Mod.	A	Pass
Electrical Fast Transients (EFT)	IEC 61000-4-4:2012	AC ±1.0Kv DC ±0.5Kv	B	Pass
Surge	IEC 61000-4-5:2005	±1Kv D.M.† ±2Kv C.M.‡	B	Pass
Continuous Induced RF Disturbances, 0.15MHz to 10MHz	IEC 61000-4-6:2008	3Vr.m.s.(emf), 80%, 1kHz Amp. Mod.	A	Pass
Continuous Induced RF Disturbances, 10MHz to 30MHz		3 to 1Vr.m.s.(emf), 80%, 1kHz Amp. Mod	A	
Continuous Induced RF Disturbances, 30MHz to 80MHz		1Vr.m.s.(emf), 80%, 1kHz Amp. Mod	A	
Power-Frequency Magnetic Field	IEC 61000-4-8:2009	1A/m	A	N/A
Voltage Dips	IEC 61000-4-11:2004	< 5 % U _T * for 0.5per	B	Pass
		70 % U _T * for 25/30per	C	
Voltage Interruptions		< 5 % U _T * for 250/300per	C	

Remark:

Pass	Test item meets the requirement
Fail	Test item does not meet the requirement
N/A	Test case does not apply to the test object
A.M	Amplitude Modulation
†	Differential Mode
‡	Common Mode
*	U _T is the nominal supply voltage



2 Contents

	Page
COVER PAGE	1
1 TEST SUMMARY	2
2 CONTENTS	3
3 GENERAL INFORMATION.....	5
3.1 GENERAL DESCRIPTION OF E.U.T.	5
3.2 DETAILS OF E.U.T.	5
3.3 DESCRIPTION OF SUPPORT UNITS	5
3.4 STANDARDS APPLICABLE FOR TESTING	5
3.5 TEST FACILITY.....	6
3.6 SUBCONTRACTED.....	6
3.7 ABNORMALITIES FROM STANDARD CONDITIONS	6
4 EQUIPMENT USED DURING TEST	7
4.1 SOFTWARE LIST	9
4.2 MEASUREMENT UNCERTAINTY	9
4.3 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT.....	10
4.4 DECISION RULE.....	10
5 EMISSION TEST RESULTS.....	11
5.1 MAINS TERMINALS DISTURBANCE VOLTAGE.....	11
5.1.1 E.U.T. Operation	11
5.1.2 Block Diagram of Test Setup	11
5.1.3 Measurement Data	11
5.1.4 Corrected Amplitude & Margin Calculation	12
5.1.5 Mains Terminals Disturbance Voltage Test Data.....	12
5.2 RADIATED ELECTROMAGNETIC DISTURBANCE, 9kHz TO 30MHz.....	14
5.2.1 E.U.T. Operation	14
5.2.2 Block Diagram of Test Setup	14
5.2.3 Radiated Electromagnetic Disturbance Test Data, 9kHz to 30MHz.....	15
5.3 RADIATED EMISSION, 30MHz TO 1GHz	21
5.3.1 E.U.T. Operation	21
5.3.2 Block Diagram of Test Setup	21
5.3.3 Measurement Data	21
5.3.4 Corrected Amplitude & Margin Calculation	22
5.3.5 Radiated Emission Test Data.....	22
5.4 RADIATED EMISSION, 1GHz TO 6GHz.....	26
5.4.1 E.U.T. Operation	26
5.4.2 Block Diagram of Test Setup	26
5.4.3 Measurement Data	26
5.4.4 Corrected Amplitude & Margin Calculation	27
5.4.5 Radiated Emission Test Data	27
6 IMMUNITY TEST RESULTS.....	31
6.1 PERFORMANCE CRITERIA	31
6.2 ELECTROSTATIC DISCHARGE (ESD).....	32
6.2.1 E.U.T. Operation	32
6.2.2 Block Diagram of Setup	32
6.2.3 Direct Discharge Test Results	33
6.2.4 Indirect Discharge Test Results.....	33
6.3 CONTINUOUS RF ELECTROMAGNETIC FIELD DISTURBANCES.....	34
6.3.1 E.U.T. Operation	34



6.3.2	Block Diagram of Setup	34
6.3.3	Test Results	35
6.4	ELECTRICAL FAST TRANSIENTS (EFT)	36
6.4.1	E.U.T. Operation	36
6.4.2	Block Diagram of Setup	37
6.4.3	Test Results	37
6.5	SURGE	38
6.5.1	E.U.T. Operation	38
6.5.2	Block Diagram of Setup	38
6.5.3	Test Result	39
6.6	CONTINUOUS INDUCED RF DISTURBANCE	40
6.6.1	E.U.T. Operation	40
6.6.2	Block Diagram of Setup	40
6.6.3	Test Results	41
6.7	VOLTAGE DIPS AND INTERRUPTIONS	42
6.7.1	E.U.T. Operation	42
6.7.2	Block Diagram of Setup	42
6.7.3	Test Results	43
7	PHOTOGRAPHS – TEST SETUP	44
7.1	PHOTOGRAPH – MAINS TERMINAL DISTURBANCE VOLTAGE TEST SETUP	44
7.2	PHOTOGRAPH – RADIATED ELECTROMAGNETIC DISTURBANCE TEST SETUP	44
7.2	PHOTOGRAPH – RADIATED EMISSION TEST SETUP, 30MHZ TO 1GHZ	45
7.3	PHOTOGRAPH – RADIATED EMISSION TEST SETUP, 1GHZ TO 6GHZ	45
7.4	PHOTOGRAPH – ESD IMMUNITY TEST SETUP	46
7.5	PHOTOGRAPH – CONTINUOUS RF ELECTROMAGNETIC FIELD DISTURBANCES TEST SETUP	46
7.6	PHOTOGRAPH – EFT IMMUNITY TEST SETUP	47
7.7	PHOTOGRAPH – SURGE IMMUNITY TEST SETUP	47
7.8	PHOTOGRAPH – CONTINUOUS INDUCED RF DISTURBANCE TEST SETUP	48
7.9	PHOTOGRAPH – VOLTAGE DIPS AND INTERRUPTIONS IMMUNITY TEST SETUP	48
8	PHOTOGRAPHS – CONSTRUCTIONAL DETAILS	49
8.1	EUT – EXTERNAL PHOTOS	49
8.2	EUT – INTERNAL PHOTOS	50



3 General Information

3.1 General Description of E.U.T.

Product Name : Wireless bamboo speaker
Model No. : MO6385
Remark : ---

3.2 Details of E.U.T.

Technical Data : Input: DC 5V, 0.3A
Battery: 3.7V, 300mAh, 1.11Wh

3.3 Description of Support Units

The EUT has been tested as an independent unit. MO6385 is the test sample. The DV, LOOP and RED tests were performed in the condition of AC 240V/50Hz input. The other tests were performed in the condition of AC 230V/50Hz input. The full tests were performed with the AC adapter specified by the laboratory. The RE, ESD and RS tests were performed in the additional condition of battery 3.7V input.

3.4 Standards Applicable for Testing

The tests were performed according to following standards:

EN 55032:2015+A11:2020 +A1:2020	Electromagnetic compatibility of multimedia equipment - Emission Requirements
EN 55035:2017+A11:2020	Electromagnetic compatibility of multimedia equipment - Immunity requirements
EN IEC 55015:2019 +A11:2020	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment
EN IEC 61547:2023	Equipment for general lighting purposes - EMC immunity requirements



3.5 Test Facility

The test facility has a test site registered with the following organizations:

- **ISED – Registration No.: 21895**

Waltek Testing Group (Foshan) Co., Ltd. has been registered and fully described in a report filed with the Innovation, Science and Economic Development Canada (ISED). The acceptance letter from the ISED is maintained in our files. Registration ISED number: 21895, March 12, 2019

- **FCC – Registration No.: 820106**

Waltek Testing Group (Foshan) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 820106, August 16, 2018

- **NVLAP – Lab Code: 600191-0**

Waltek Testing Group (Foshan) Co., Ltd. EMC Laboratory is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 600191-0.

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

3.6 Subcontracted

Whether parts of tests for the product have been subcontracted to other labs:

☐ Yes ☒ No

If Yes, list the related test items and lab information:

Test items: ---

Lab information: ---

3.7 Abnormalities from Standard Conditions

None.



4 Equipment Used during Test

☐ Mains Terminal Disturbance Voltage (Conducted Emission) 1#					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	EMI Test Receiver	R&S	ESR3	102423	Valid
2.	LISN	R&S	ENV216	101343	Valid
3.	Cable	HUBER+SUHNER	CBL2-NN-6M	223NN624	Valid
4.	Switch	CD	RSU-A4 18G	RSUA4008	Valid
☒ Mains Terminal Disturbance Voltage (Conducted Emission) 2#					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	EMI Test Receiver	R&S	ESCI	101178	Valid
2.	LISN	R&S	ENV216	101215	Valid
3.	Cable	HUBER+SUHNER	CBL2-NN-6M	6102701	Valid
4.	Switch	ESE	RSU/M2	---	Valid
☐ Mains Terminal Disturbance Voltage (Conducted Emission) 3#					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	EMI Test Receiver	R&S	ESR3	102842	Valid
2.	LISN	R&S	ENV216	101542	Valid
3.	Cable	YIHENG	LMR195UF-NMNM-2.5	---	Valid
4.	Manual RF Switch	YIHENG	SW-2	RSU0402	Valid
☒ Radiated Electromagnetic Disturbance(9kHz to 30MHz)					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	EMI Test Receiver	R&S	ESCI	101178	Valid
2.	Three Loops Antenna	SCHWARZBECK	HXYZ9170	213	Valid
☒ Radiated Emission (30MHz to 1GHz) 1#					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	3m Semi-anechoic Chamber	CHANGCHUANG	9m×6m×6m	-	Valid
2.	EMI Test Receiver	R&S	ESR7	101566	Valid
3.	Trilog Broadband Antenna	SCHWARZBECK	VULB 9162	9162-117	Valid
4.	Coaxial Cable (below 1GHz)	H+S	CBL3-NN-12+3 m	214NN320	Valid
☐ Radiated Emission (30MHz to 1GHz) 2#					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	3m Semi-anechoic Chamber	YIHENG	9m×6m×6m	YH2021071801	Valid
2.	EMI Test Receiver	R&S	ESR7	102454	Valid
3.	Trilog Broadband	SCHWARZBECK	VULB 9163	01418	Valid



	Antenna				
4.	Coaxial Cable (below 1GHz)	Times-Microwave Systems	LMR240UF-NMSM- 7.5	-	Valid
☒ Radiated Emission (1GHz to 6GHz) 1#					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	3m Semi-anechoic Chamber	CHANGCHUANG	9m×6m×6m	-	Valid
2.	EMI Test Receiver	R&S	ESR7	101566	Valid
3.	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	01561	Valid
4.	Coaxial Cable (above 1GHz)	Times-Microwave	CBL5-NN	-	Valid
5.	Preamplifier	Lunar E M	LNA1G18-40	20160501002	Valid
☐ Radiated Emission (1GHz to 6GHz) 2#					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	3m Semi-anechoic Chamber	YIHENG	9m×6m×6m	YH2021071801	Valid
2.	EMI Test Receiver	R&S	ESR7	102454	Valid
3.	Broad-band Horn Antenna	SCHWARZBECK	BBHA9120D	02465	Valid
4.	Coaxial Cable (above 1GHz)	Times-Microwave Systems	SFT205-NMSM-7	-	Valid
5.	Preamplifier	Tonscend	TAP0118045	AP21J806168	Valid
☒ ESD					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	ESD Simulator	TESEQ	NSG437	521	Valid
☒ EFT & Voltage Dips and Interruptions					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	EMS test system	TESEQ	NSG3040	1858	Valid
☒ Surge					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	Surge Simulator	TESEQ	NSG3060	1395	Valid
☒ Injected Currents					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	Conducted Immunity test system	TESEQ	NSG4070	45345	Valid
2.	CDN	TESEQ	CDN M016	31586	Valid
3.	6dB Attenuator	TESEQ	ATN6075	32122	Valid



☒ Radio-frequency Electromagnetic Fields					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	RF Power Amplifier	OPHIR	5225R	1051/1712	Valid
2.	RF Power Amplifier	OPHIR	5293RE	1051/171	Valid
3.	Stacked double logarithmic periodic antenna	SCHWARZBECK	STLP9128E-SPECIAL	142	Valid
4.	Stacked double logarithmic periodic antenna	SCHWARZBECK	STLP 9149	476	Valid
5.	RF signal generator	Agilent	N5181A	MY48180720	Valid
6.	Power meter	RS	NRP6A	101133	Valid
7.	Power meter	RS	NRP6A	101134	Valid

☐: Not Used

☒: Used

4.1 Software List

Description	Manufacturer	Model	Version
EMI Test Software (Conducted Emission 1#)	FARATRONIC	EZ-EMC	EMEC-3A1
EMI Test Software (Conducted Emission 2#)	FARATRONIC	EZ-EMC	CON-03A1
EMI Test Software (Conducted Emission 3#)	FARATRONIC	EZ-EMC	COM 3A1.1
EMI Test Software (LOOP)	FARATRONIC	EZ-EMC	CON-03A1
EMI Test Software (Radiated Emission 1#)	FARATRONIC	EZ-EMC	RA-03A1-1
EMI Test Software (Radiated Emission 2#)	FARATRONIC	EZ-EMC	RA-03A1-1
Radiated Immunity Test Software	TONSCEND	JS35-RS	V2.0.1.7

4.2 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Conducted Emission	150kHz~30MHz	±2.6dB	(1)
Radiated Electromagnetic Disturbance	9kHz~30MHz	±3.0dB	(1)
Radiated Emission	30MHz~1GHz	±4.5dB	(1)
Radiated Emission	1GHz~6GHz	±4.5dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



4.3 Special Accessories and Auxiliary Equipment

Item	Equipment	Technical Data	Manufacturer	Model No.
1.	AC Adapter	Input: AC 100-240V~, 50/60Hz, 0.5A Output: DC 5V, 2A or DC 9V, 2A	HUAWEI	HW-090200CH0

4.4 Decision Rule

Compliance or non-compliance with a disturbance limit shall be determined in the following manner.

If U_{LAB} is less than or equal to U_{cispr} , then

- Compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- Non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{LAB} is greater than U_{cispr} , then

- Compliance is deemed to occur if no measured disturbance level, increased by $(U_{LAB} - U_{cispr})$, exceeds the disturbance limit;
- Non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{LAB} - U_{cispr})$, exceeds the disturbance limit.

WALTEK



5 Emission Test Results

5.1 Mains Terminals Disturbance Voltage

Test Requirement	: EN 55032 Annex A.3 ; EN IEC 55015 Clause 4.3.1
Test Method	: EN 55032 Annex A.3 ; EN IEC 55015 Clause 8.3
Limit	: Table A.10 of EN 55032 ; Table 1 of EN IEC 55015
Test Result	: Pass
Frequency Range	: 150kHz to 30MHz of EN 55032; 9kHz to 150MHz of EN IEC 55015
Class	: Class B

5.1.1 E.U.T. Operation

Operating Environment:


Temperature	: 24.8°C
Humidity	: 49.3%RH
Atmospheric Pressure	: 101.2kPa

EUT Operation:

Input Voltage	: AC 240V/50Hz
Operating Mode	: Lighting + BT link mode with AC input

5.1.2 Block Diagram of Test Setup

The Mains Terminals Disturbance Voltage tests were performed in accordance with the CISPR 16-1-2.

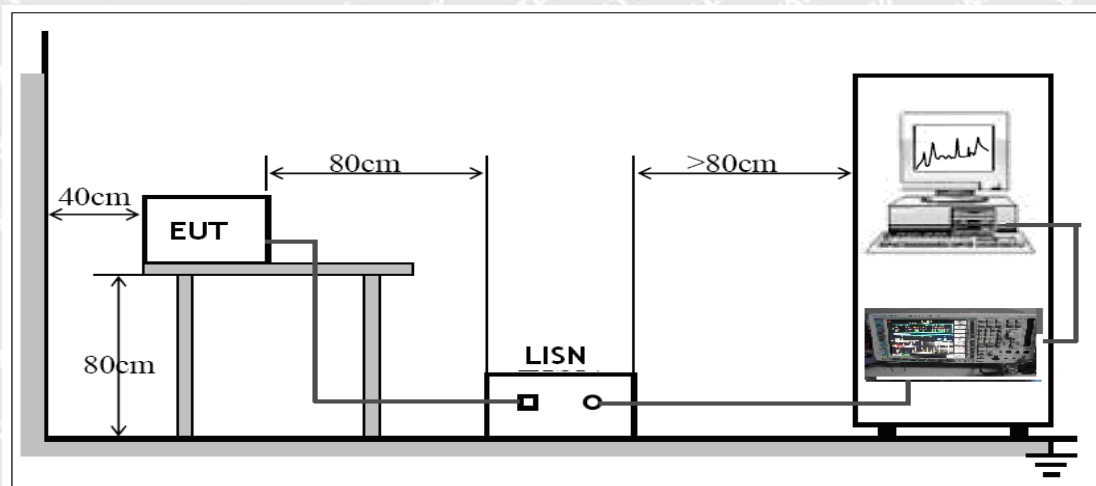

5.1.3 Measurement Data

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.



5.1.4 Corrected Amplitude & Margin Calculation

The Corrected factor is calculated by adding LISN VDF(Voltage Division Facotr), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Measurement} = \text{Reading Level} + \text{Correct Factor}$$


$$\text{Correct Facotor} = \text{LISN VDF} + \text{Cable Loss}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Measurement} - \text{Limit}$$

5.1.5 Mains Terminals Disturbance Voltage Test Data


Live Line

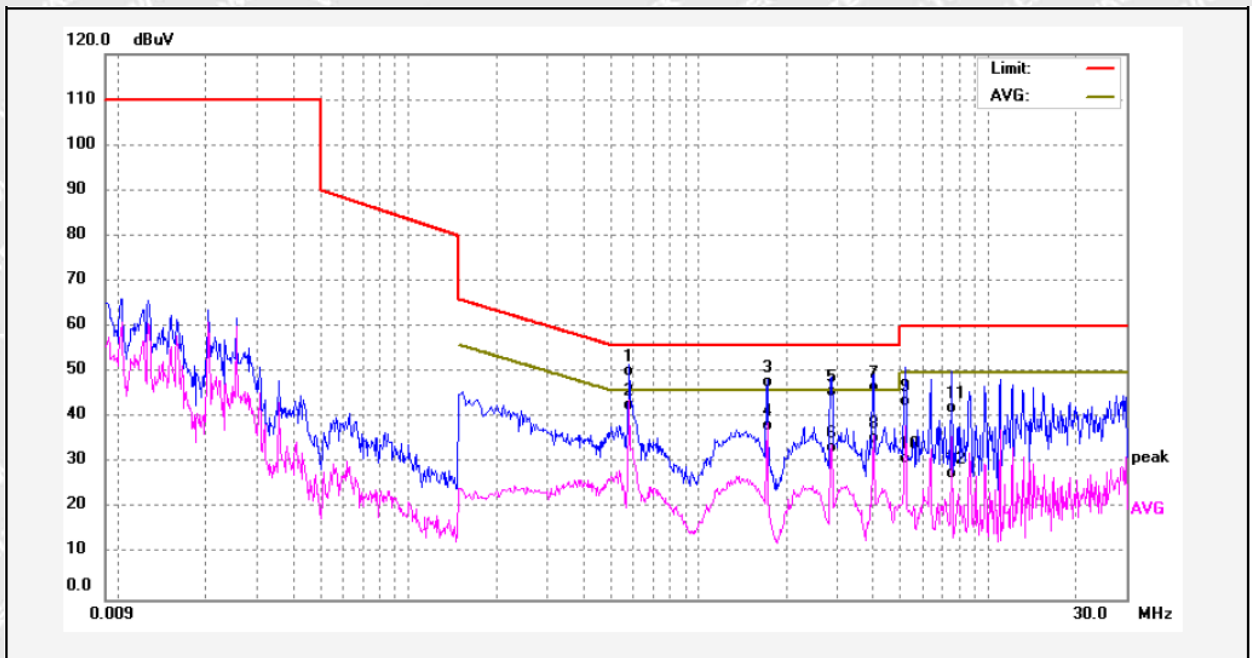

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.5780	40.45	9.66	50.11	56.00	-5.89	QP	
2	0.5780	33.19	9.66	42.85	46.00	-3.15	AVG	
3	1.7300	38.01	9.71	47.72	56.00	-8.28	QP	
4	1.7300	28.68	9.71	38.39	46.00	-7.61	AVG	
5	2.8780	36.12	9.78	45.90	56.00	-10.10	QP	
6	2.8780	23.74	9.78	33.52	46.00	-12.48	AVG	
7	4.0380	36.82	9.83	46.65	56.00	-9.35	QP	
8	4.0380	25.61	9.83	35.44	46.00	-10.56	AVG	
9	5.2020	33.87	9.89	43.76	60.00	-16.24	QP	
10	5.2020	21.25	9.89	31.14	50.00	-18.86	AVG	
11	7.4820	32.19	9.98	42.17	60.00	-17.83	QP	
12	7.4820	17.73	9.98	27.71	50.00	-22.29	AVG	



Neutral Line

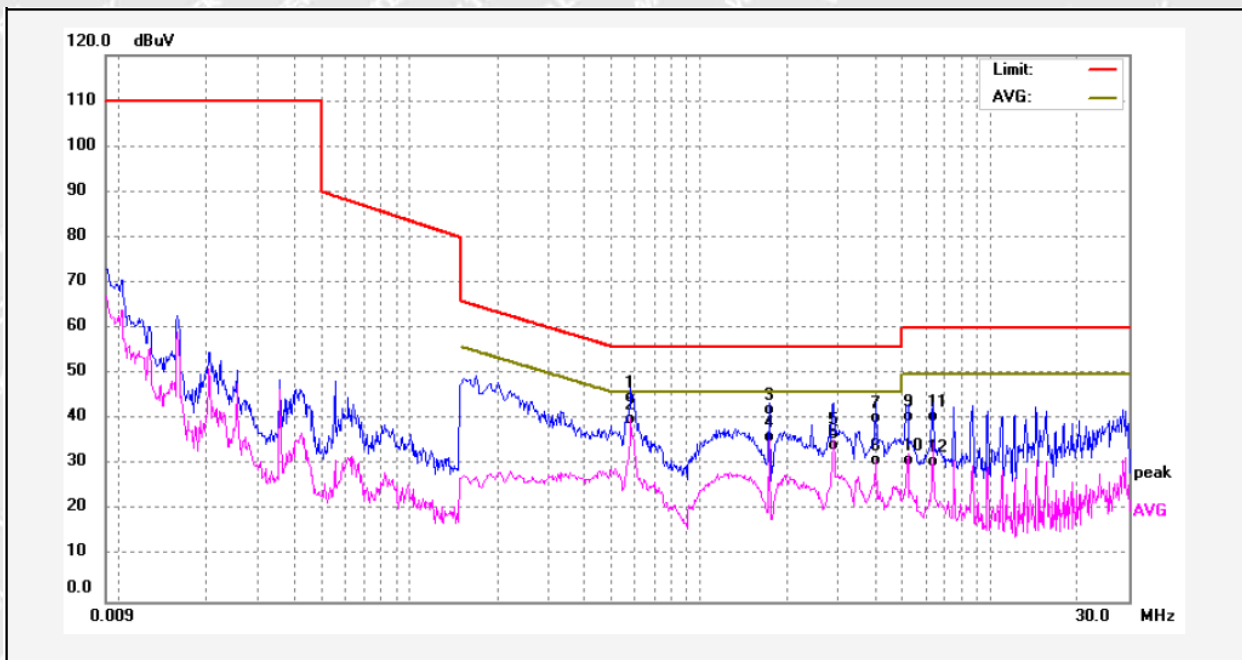

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.5780	35.22	9.59	44.81	56.00	-11.19	QP	
2	0.5780	30.49	9.59	40.08	46.00	-5.92	AVG	
3	1.7340	32.43	9.63	42.06	56.00	-13.94	QP	
4	1.7340	26.57	9.63	36.20	46.00	-9.80	AVG	
5	2.8980	27.01	9.69	36.70	56.00	-19.30	QP	
6	2.8980	24.76	9.69	34.45	46.00	-11.55	AVG	
7	4.0380	30.49	9.74	40.23	56.00	-15.77	QP	
8	4.0380	21.27	9.74	31.01	46.00	-14.99	AVG	
9	5.2100	30.76	9.81	40.57	60.00	-19.43	QP	
10	5.2100	21.29	9.81	31.10	50.00	-18.90	AVG	
11	6.3700	30.80	9.85	40.65	60.00	-19.35	QP	
12	6.3700	20.84	9.85	30.69	50.00	-19.31	AVG	



5.2 Radiated Electromagnetic Disturbance, 9kHz to 30MHz

Test Requirement : EN IEC 55015 Clause 4.5.2

Test Method : EN IEC 55015 Clause 9.3.2

Test Result : Pass

Frequency Range : 9kHz to 30MHz

Class/Severity : Table 8 of EN IEC 55015

5.2.1 E.U.T. Operation

Operating Environment:

Temperature : 24.8°C

Humidity : 49.3%RH

Barometric Pressure : 101.2kPa


EUT Operation:

Input Voltage : AC 240V/50Hz for mode 1; Battery 3.7V for mode 2

Operating Mode : Mode 1: Lighting + BT link mode with AC Input
Mode 2: Lighting + BT link mode with battery operated

5.2.2 Block Diagram of Test Setup

The Radiated Electromagnetic Disturbance (9kHz to 30MHz) test was performed in accordance with the EN IEC 55015.

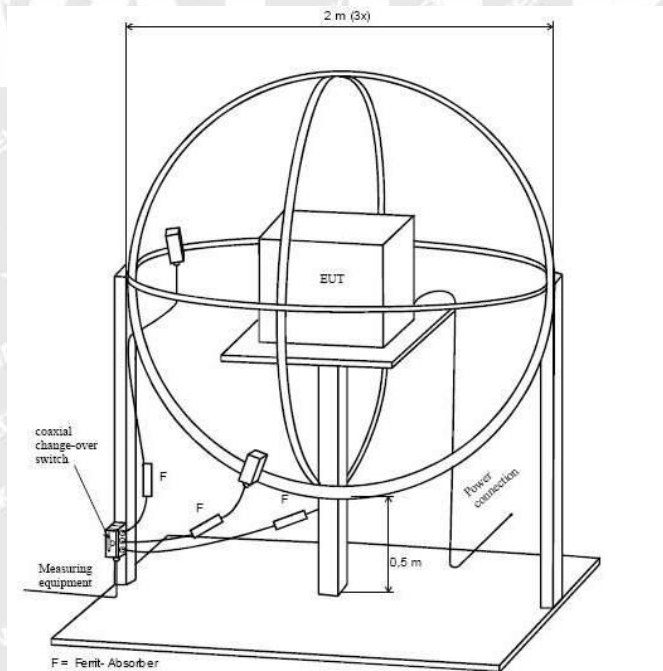


1.1.1 Measurement Data

According to the data in section 5.2.4, the EUT complied with the EN IEC 55015 standards. The maximised peak emissions from the EUT was scanned and measured for three loops. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.



5.2.3 Radiated Electromagnetic Disturbance Test Data, 9kHz to 30MHz
Lighting + BT link mode with AC Input


Loop X

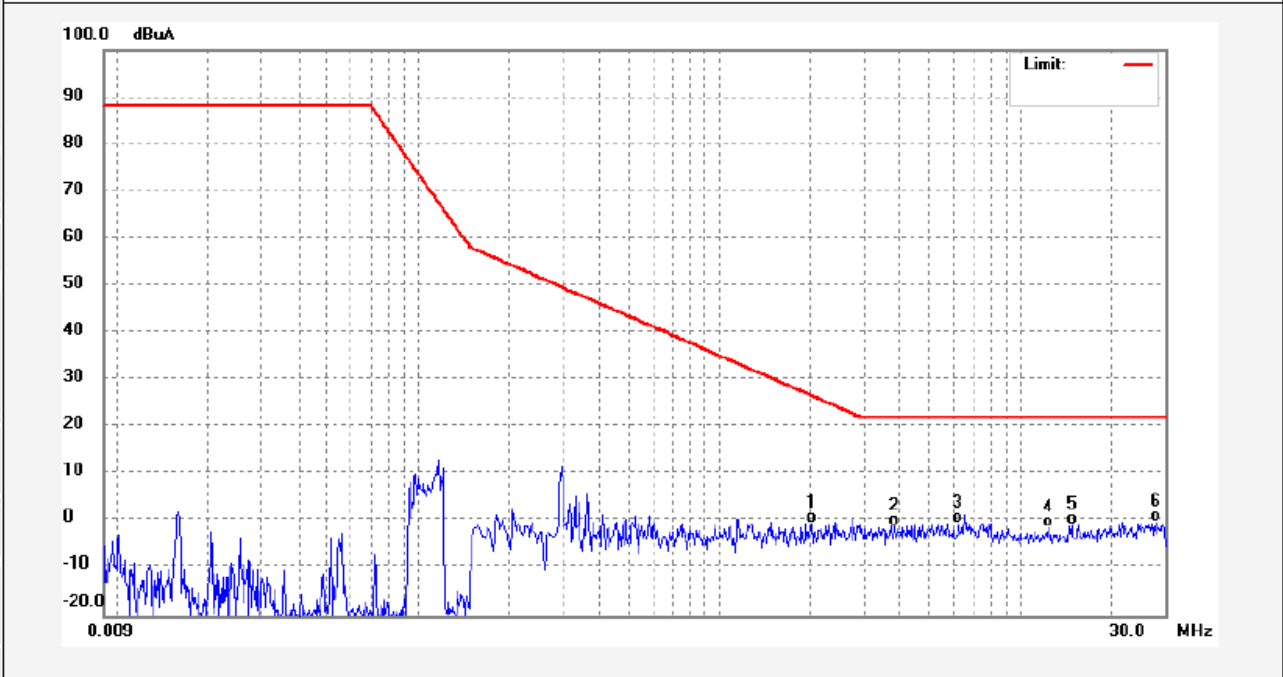

No.	Freq. (MHz)	Reading (dBuA)	Factor (dB)	Result (dBuA)	Limit dBuA	Margin (dB)	Detector	Remark
1	2.0300	-0.42	0.09	-0.33	26.69	-27.02	QP	
2	3.7900	-1.04	0.14	-0.90	22.00	-22.90	QP	
3	6.2180	-0.44	0.20	-0.24	22.00	-22.24	QP	
4	12.3900	-1.46	0.27	-1.19	22.00	-23.19	QP	
5	14.8100	-1.03	0.30	-0.73	22.00	-22.73	QP	
6	28.1140	-0.49	0.42	-0.07	22.00	-22.07	QP	




Loop Y

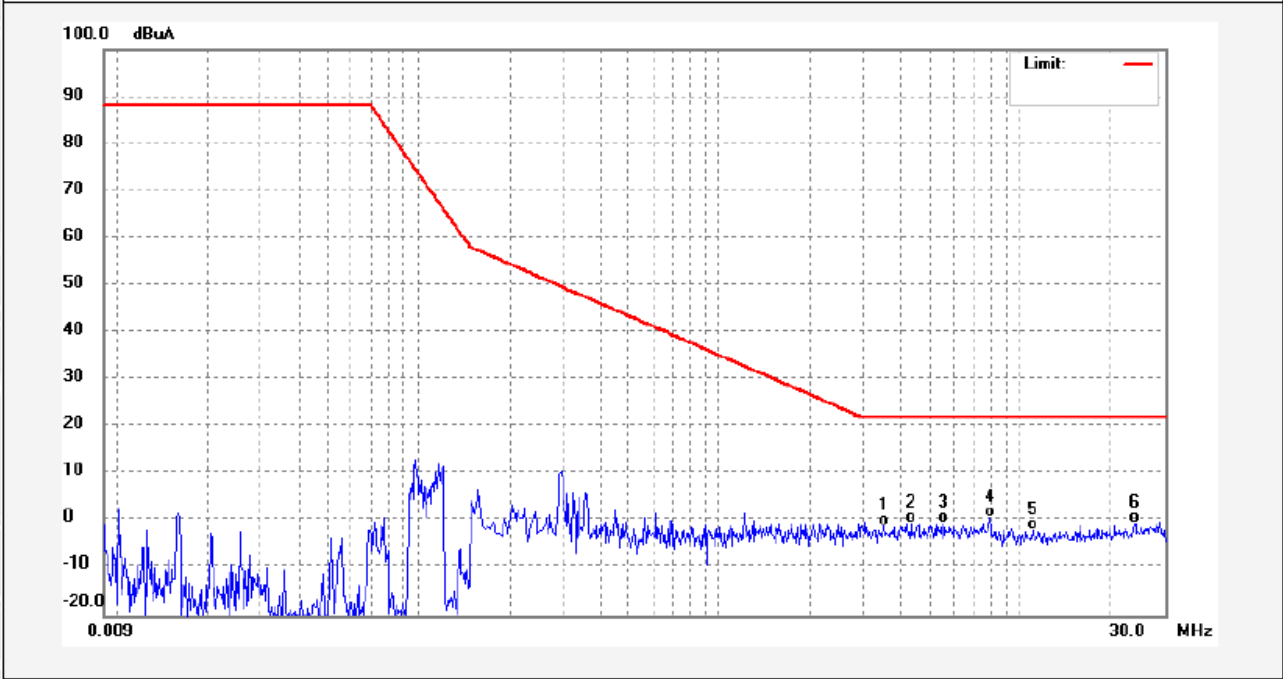

No.	Freq. (MHz)	Reading (dBuA)	Factor (dB)	Result (dBuA)	Limit dBuA	Margin (dB)	Detector	Remark
1	3.5220	-1.18	0.14	-1.04	22.00	-23.04	QP	
2	4.3140	-0.52	0.16	-0.36	22.00	-22.36	QP	
3	5.5500	-0.61	0.19	-0.42	22.00	-22.42	QP	
4	7.9300	0.63	0.22	0.85	22.00	-21.15	QP	
5	10.9700	-2.23	0.25	-1.98	22.00	-23.98	QP	
6	23.9020	-0.65	0.38	-0.27	22.00	-22.27	QP	



Loop Z

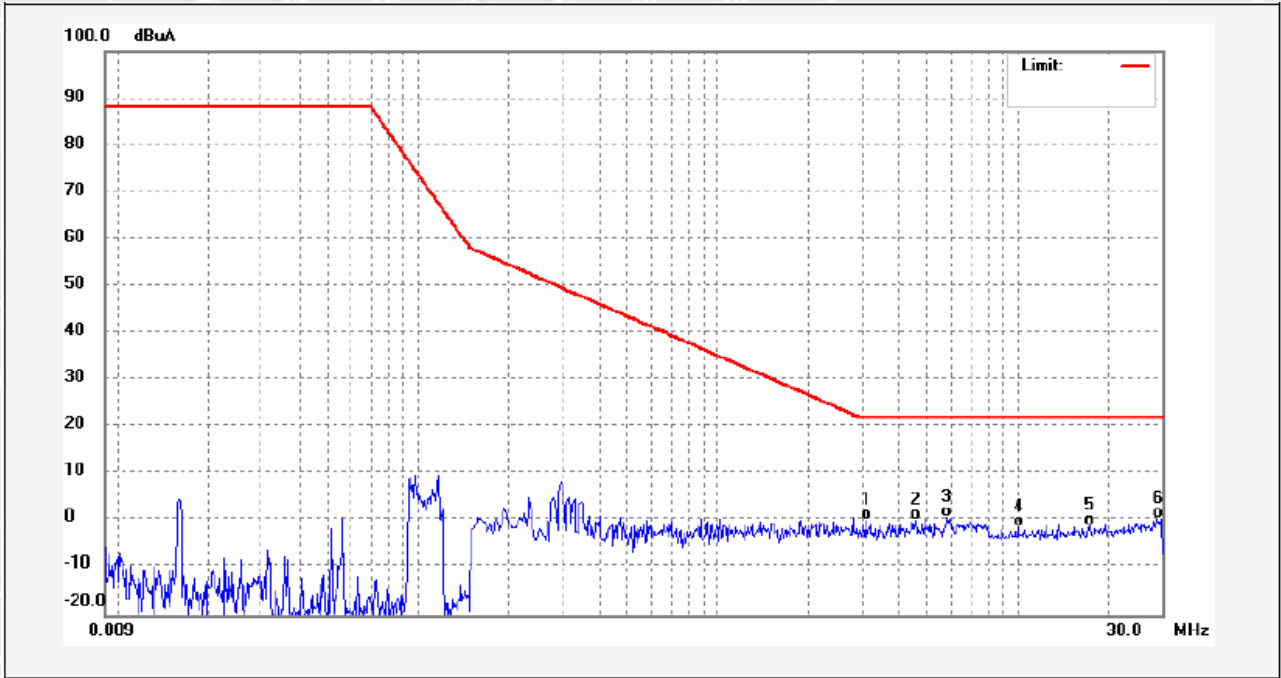


No.	Freq. (MHz)	Reading (dBuA)	Factor (dB)	Result (dBuA)	Limit dBuA	Margin (dB)	Detector	Remark
1	3.1180	0.05	0.12	0.17	22.00	-21.83	QP	
2	4.5660	0.09	0.17	0.26	22.00	-21.74	QP	
3	5.8260	0.67	0.19	0.86	22.00	-21.14	QP	
4	10.0340	-1.47	0.24	-1.23	22.00	-23.23	QP	
5	17.2780	-1.15	0.32	-0.83	22.00	-22.83	QP	
6	29.9980	0.23	0.44	0.67	22.00	-21.33	QP	



Lighting + BT link mode with battery operated


Loop X

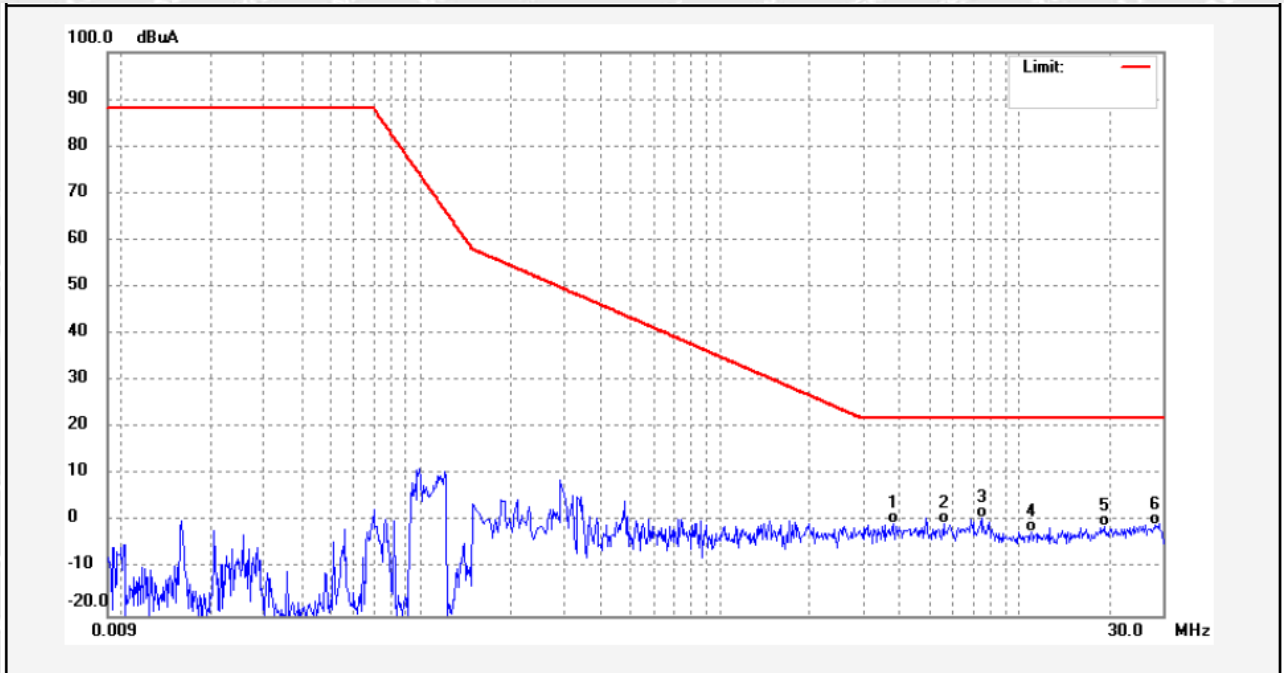

No.	Freq. (MHz)	Reading (dBuA)	Factor (dB)	Result (dBuA)	Limit dBuA	Margin (dB)	Detector	Remark
1	3.7900	-0.56	0.14	-0.42	22.00	-22.42	QP	
2	5.5939	-0.57	0.19	-0.38	22.00	-22.38	QP	
3	7.4900	0.75	0.21	0.96	22.00	-21.04	QP	
4	10.9700	-2.26	0.25	-2.01	22.00	-24.01	QP	
5	19.3580	-1.19	0.34	-0.85	22.00	-22.85	QP	
6	28.5740	-1.00	0.43	-0.57	22.00	-22.57	QP	




Loop Y

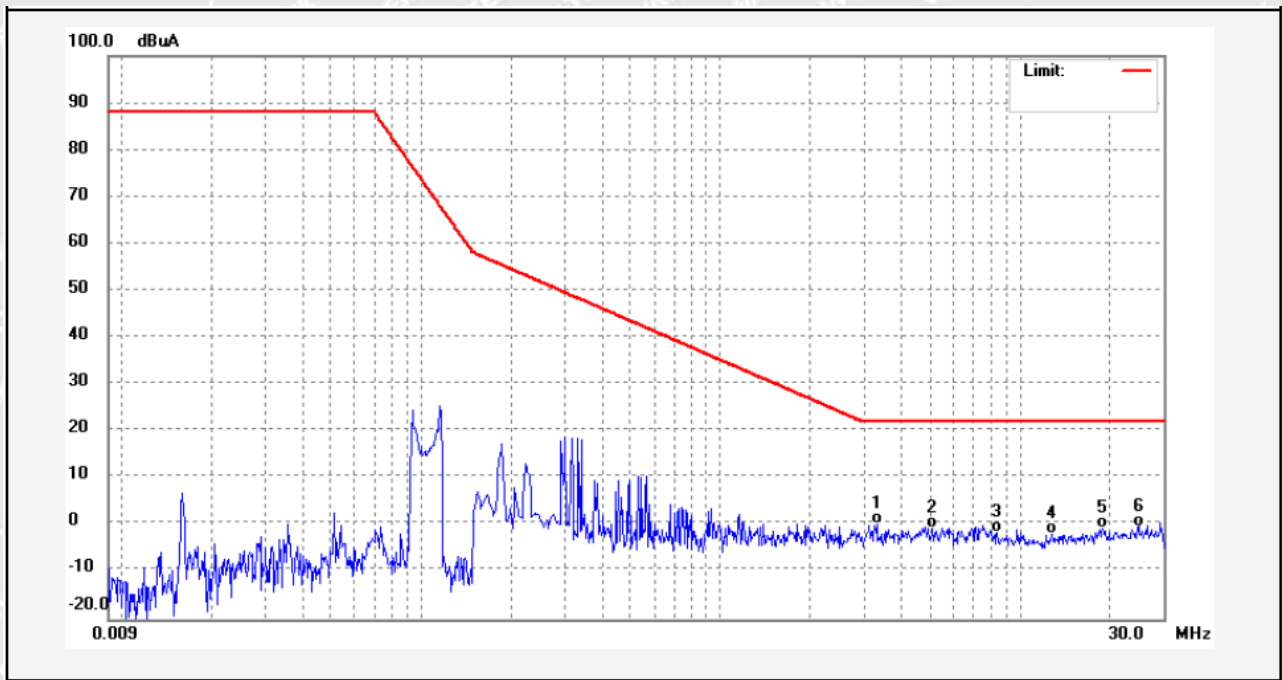

No.	Freq. (MHz)	Reading (dBuA)	Factor (dB)	Result (dBuA)	Limit (dBuA)	Margin (dB)	Detector	Remark
1	3.3260	0.17	0.13	0.30	22.00	-21.70	QP	
2	5.1180	-0.74	0.18	-0.56	22.00	-22.56	QP	
3	8.3940	-1.62	0.22	-1.40	22.00	-23.40	QP	
4	12.7980	-2.13	0.27	-1.86	22.00	-23.86	QP	
5	18.8900	-1.11	0.34	-0.77	22.00	-22.77	QP	
6	24.8900	-0.59	0.39	-0.20	22.00	-22.20	QP	



Loop Z

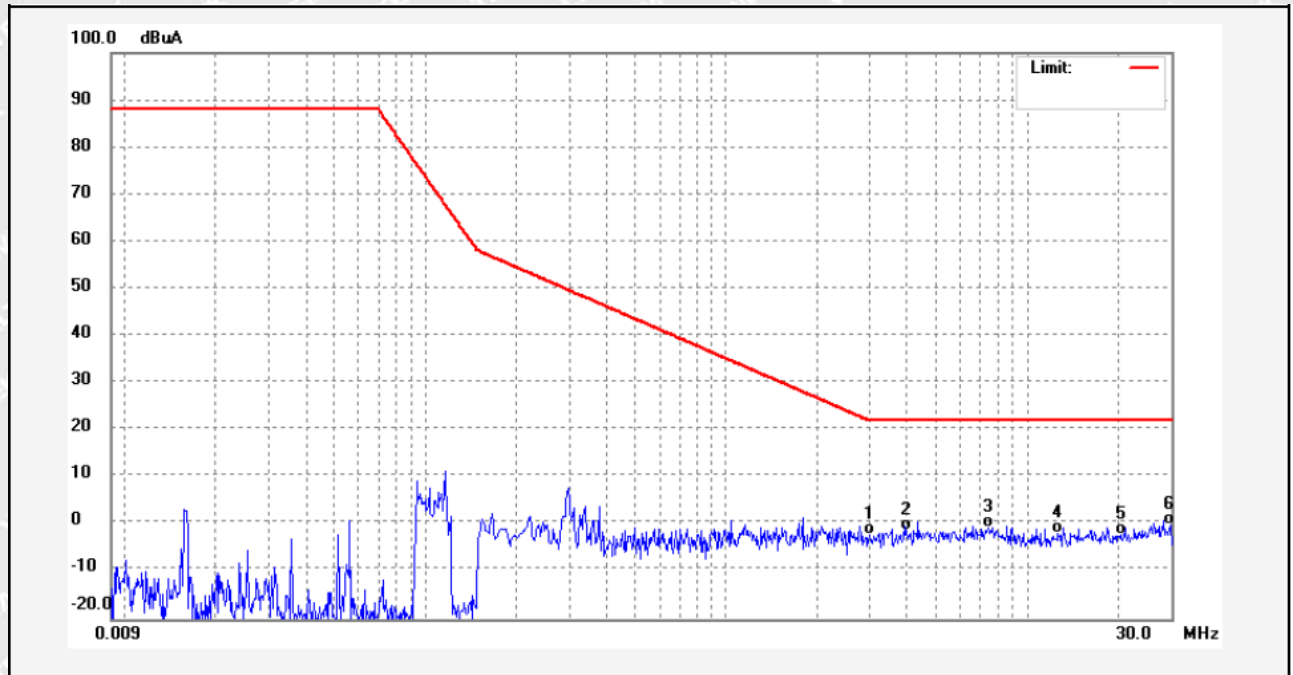

No.	Freq. (MHz)	Reading (dBuA)	Factor (dB)	Result (dBuA)	Limit (dBuA)	Margin (dB)	Detector	Remark
1	2.9940	-2.25	0.12	-2.13	22.02	-24.15	QP	
2	3.9780	-1.35	0.15	-1.20	22.00	-23.20	QP	
3	7.4300	-0.79	0.21	-0.58	22.00	-22.58	QP	
4	12.6940	-2.13	0.27	-1.86	22.00	-23.86	QP	
5	20.4900	-2.52	0.35	-2.17	22.00	-24.17	QP	
6	29.9980	-0.37	0.44	0.07	22.00	-21.93	QP	



5.3 Radiated Emission, 30MHz to 1GHz

Test Requirement	: EN 55032 Annex A.2 ; EN IEC 55015 Clause 4.5.3
Test Method	: EN 55032 Annex A.2 ; EN IEC 55015 Clause 9.3.4
Test Limit.....	: Table A.4 of EN 55032; Table 10 of EN IEC 55015
Test Result	: Pass
Frequency Range	: 30MHz to 1000MHz
Class	: Class B

5.3.1 E.U.T. Operation

Operating Environment:


Temperature.....	: 23.3°C
Humidity	: 51.3%RH
Atmospheric Pressure	: 101.2kPa

EUT Operation:

Input Voltage.....	: AC 240V/50Hz for mode 1; Battery 3.7V for mode 2
Operating Mode	: Mode 1: Lighting + BT link mode with AC Input Mode 2: Lighting + BT link mode with battery operated

5.3.2 Block Diagram of Test Setup

The Radiated Emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the CISPR 16-2-3.

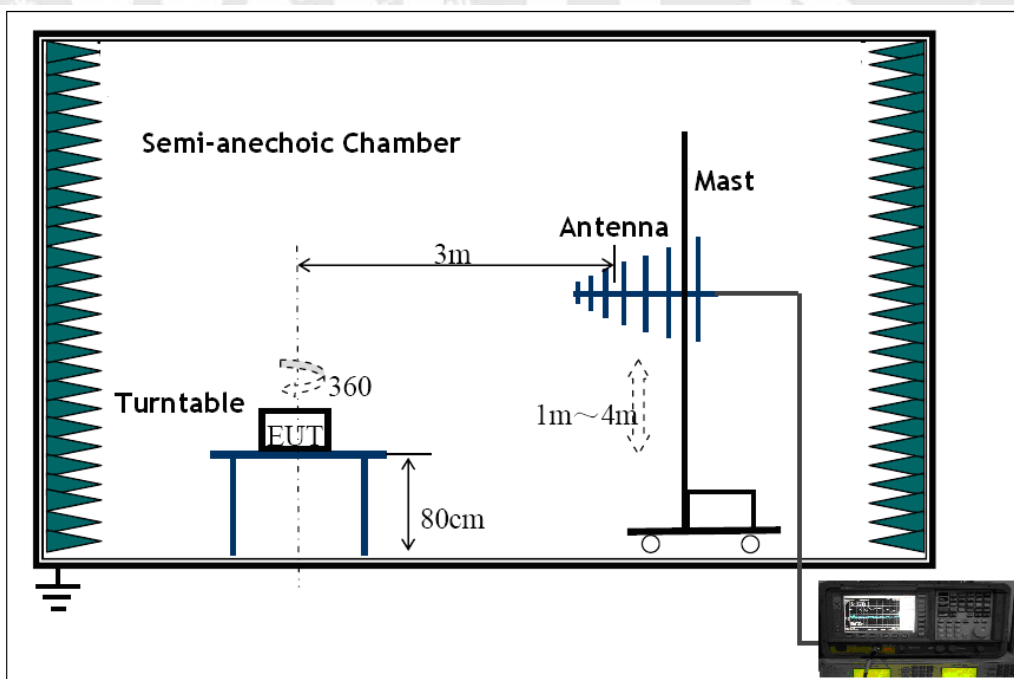

5.3.3 Measurement Data

The maximised peak emissions from the EUT was scanned and measured for EUT 0°-360°. Quasi-peak measurements were performed if peak emissions were within 6dB of the limit line.



5.3.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Corr. Factor}$$

$$\text{Corr. Factor} = \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$


The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

5.3.5 Radiated Emission Test Data

Lighting + BT link mode with AC Input


Vertical Polarization

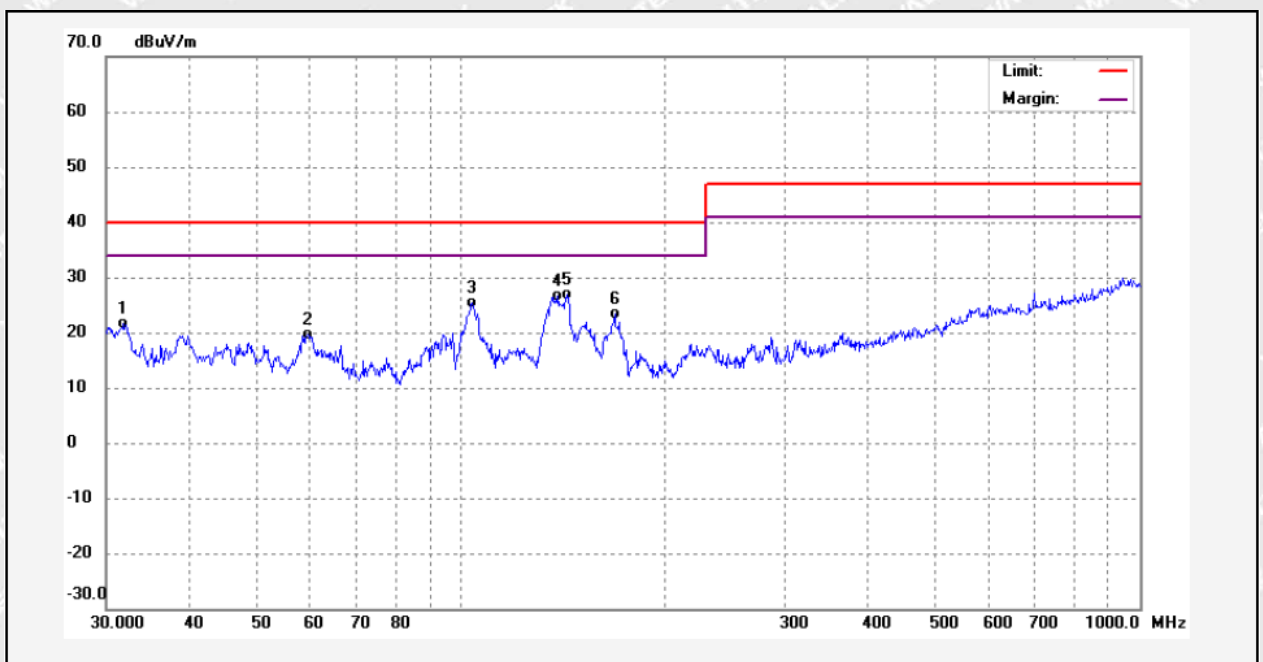

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	31.8986	9.38	12.24	21.62	40.00	-18.38	QP	
2	59.5657	5.63	13.96	19.59	40.00	-20.41	QP	
3	103.9876	12.34	12.93	25.27	40.00	-14.73	QP	
4	139.2147	17.38	9.15	26.53	40.00	-13.47	QP	
5	143.5775	17.79	9.14	26.93	40.00	-13.07	QP	
6	168.4728	12.82	10.60	23.42	40.00	-16.58	QP	




Horizontal Polarization

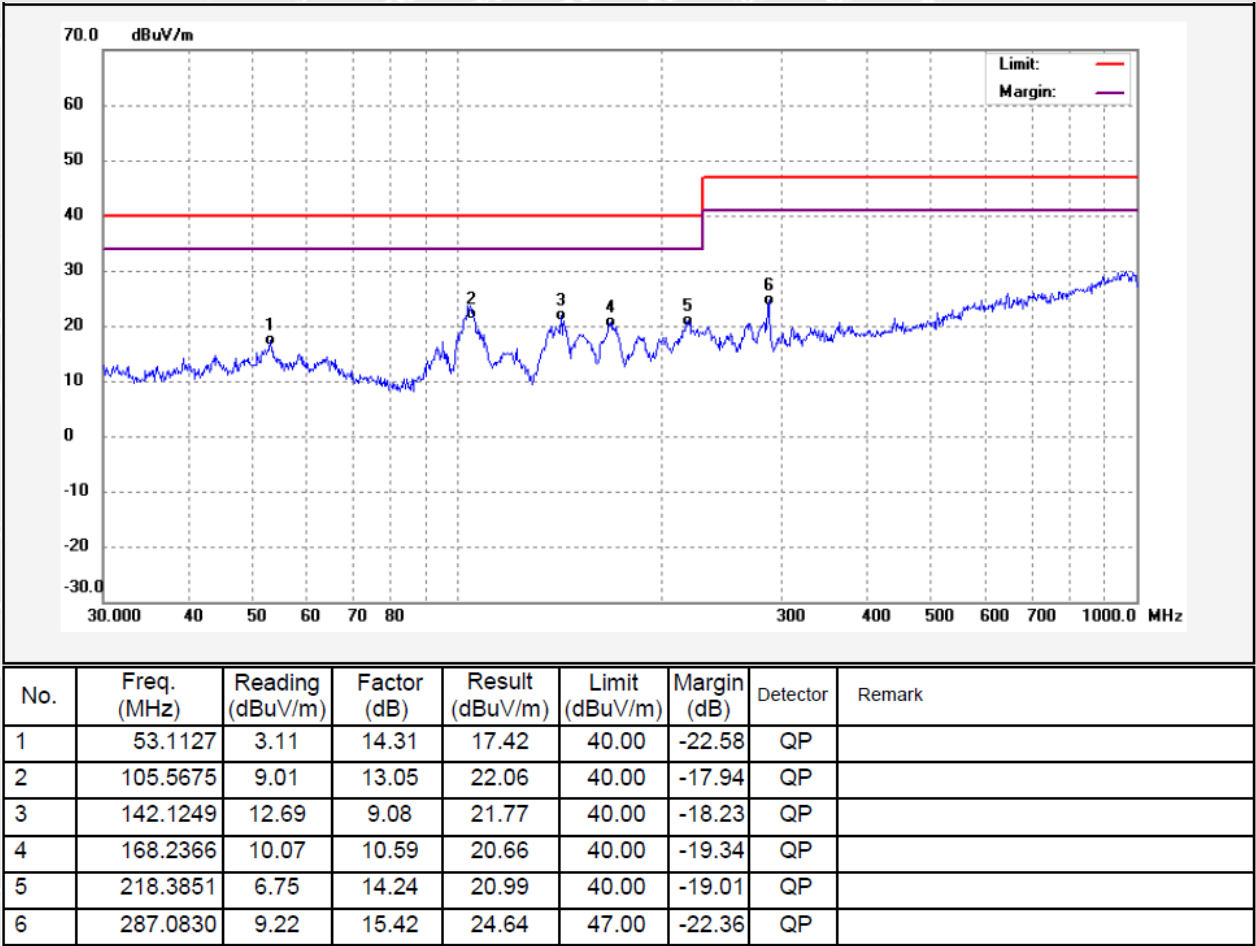



Working mode with battery operated


Vertical Polarization

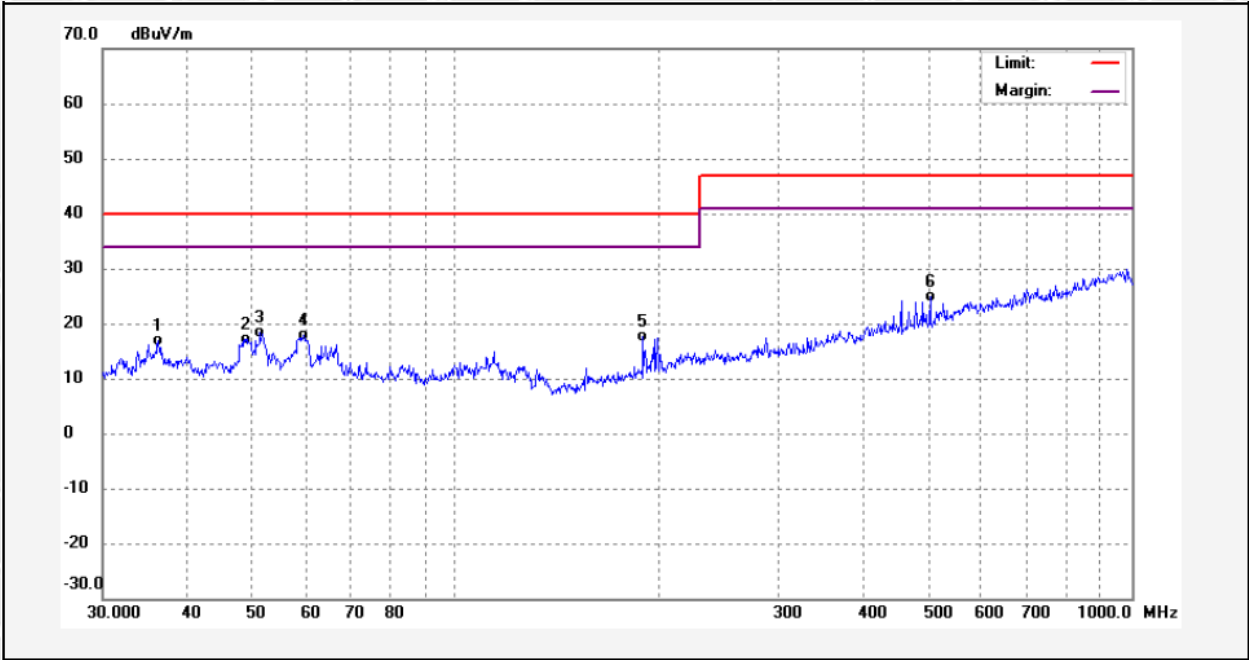

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	36.2794	4.50	12.47	16.97	40.00	-23.03	QP	
2	48.9629	2.92	14.33	17.25	40.00	-22.75	QP	
3	51.3005	3.94	14.32	18.26	40.00	-21.74	QP	
4	59.5866	3.90	13.95	17.85	40.00	-22.15	QP	
5	189.6720	5.55	12.10	17.65	40.00	-22.35	QP	
6	503.9988	4.45	20.32	24.77	47.00	-22.23	QP	



Horizontal Polarization

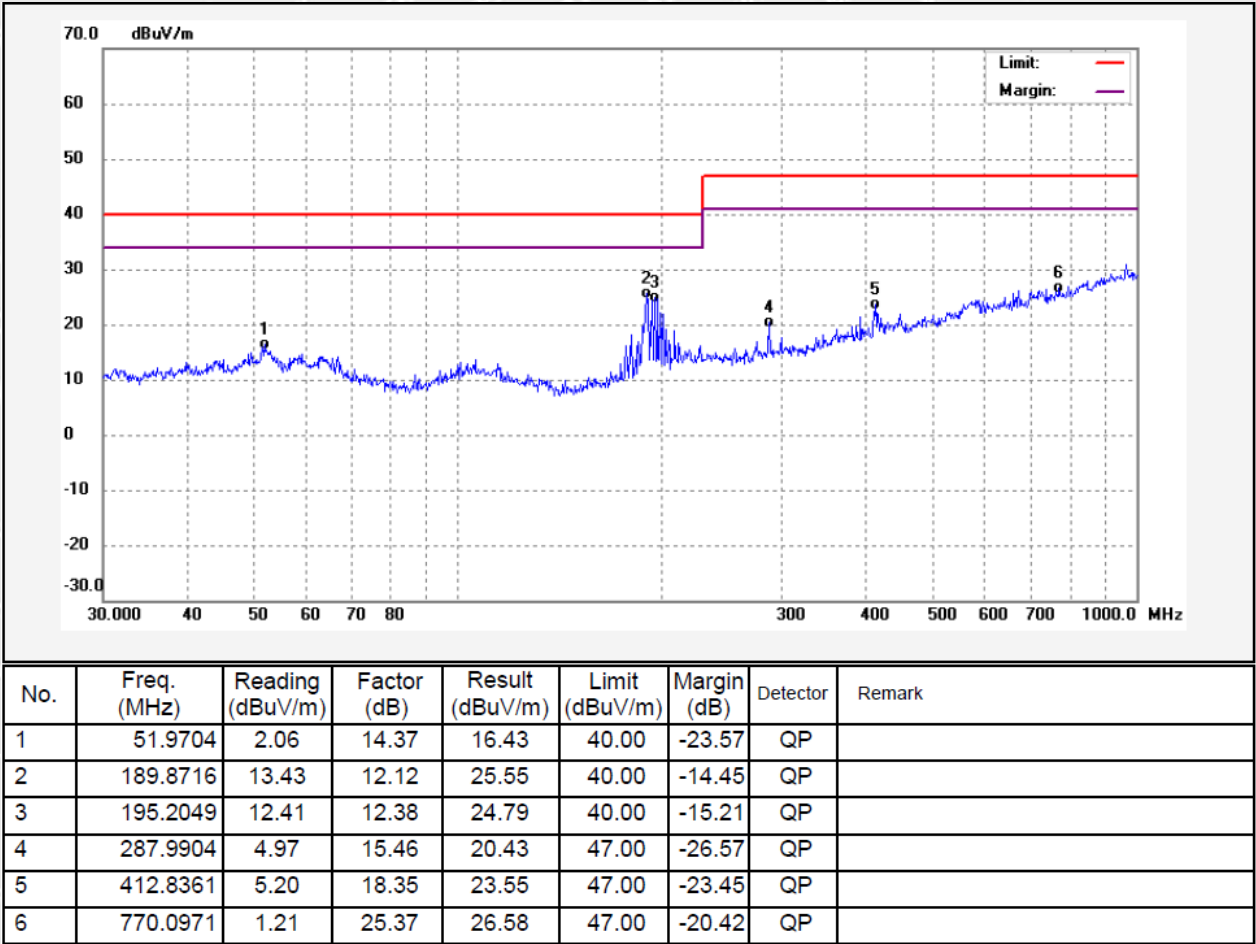



5.4 Radiated Emission, 1GHz to 6GHz

Test Requirement	: EN 55032 Annex A.2
Test Method	: EN 55032 Annex A.2
Test Limit.....	: Table A.5 of EN 55032
Test Result	: Pass
Frequency Range	: 1GHz to 6GHz
Class.....	: Class B

5.4.1 E.U.T. Operation

Operating Environment:


Temperature.....	: 23.3°C
Humidity	: 51.3%RH
Atmospheric Pressure	: 101.2kPa

EUT Operation:

Input Voltage.....	: AC 240V/50Hz for mode 1; Battery 3.7V for mode 2
Operating Mode	: Mode 1: Lighting + BT link mode with AC Input Mode 2: Lighting + BT link mode with battery operated

5.4.2 Block Diagram of Test Setup

The Radiated Emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the CISPR 16-2-3.

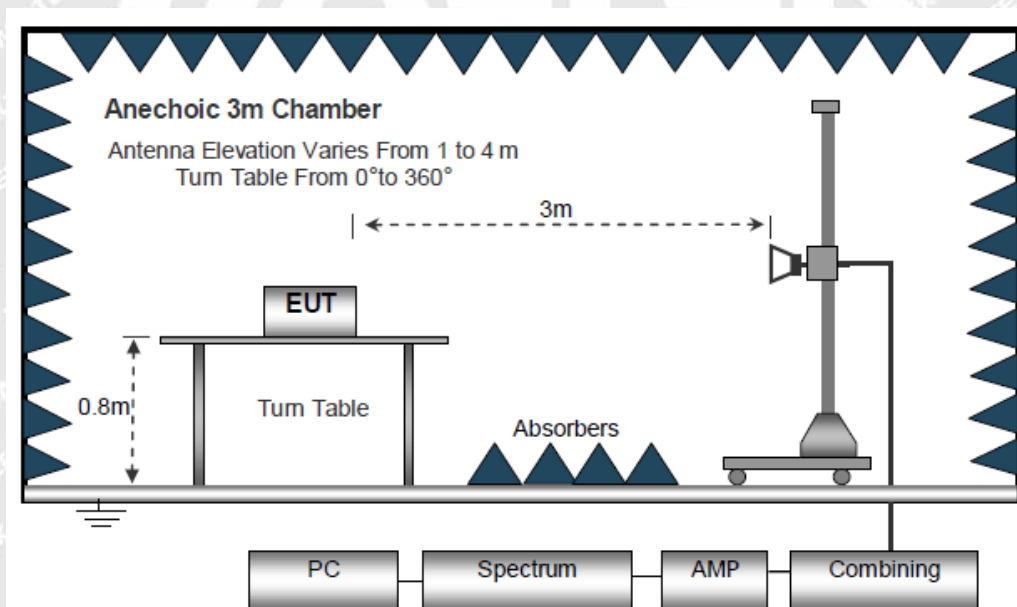

5.4.3 Measurement Data

The maximised peak emissions from the EUT was scanned and measured for EUT 0°-360°. Quasi-peak measurements were performed if peak emissions were within 6dB of the limit line.



5.4.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Corr. Factor}$$

$$\text{Corr. Factor} = \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$


The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

5.4.5 Radiated Emission Test Data

Lighting + BT link mode with AC Input


Vertical Polarization

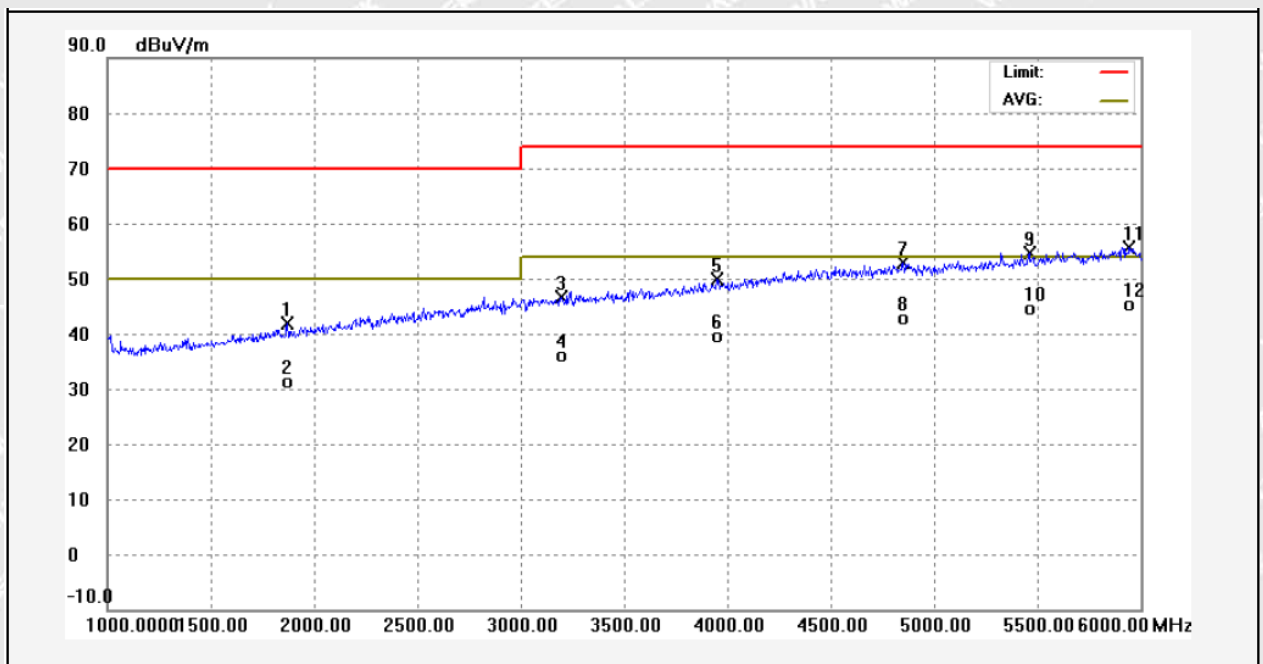

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	1871.500	11.95	29.87	41.82	70.00	-28.18	peak	
2	1871.500	1.55	29.87	31.42	50.00	-18.58	AVG	
3	3195.500	12.16	34.53	46.69	74.00	-27.31	peak	
4	3195.500	1.69	34.53	36.22	54.00	-17.78	AVG	
5	3951.000	13.40	36.47	49.87	74.00	-24.13	peak	
6	3951.000	3.08	36.47	39.55	54.00	-14.45	AVG	
7	4851.500	13.98	38.99	52.97	74.00	-21.03	peak	
8	4851.500	3.77	38.99	42.76	54.00	-11.24	AVG	
9	5462.000	14.61	40.04	54.65	74.00	-19.35	peak	
10	5462.000	4.54	40.04	44.58	54.00	-9.42	AVG	
11	5948.000	14.88	40.85	55.73	74.00	-18.27	peak	
12	5948.000	4.41	40.85	45.26	74.00	-28.74	QP	



Horizontal Polarization

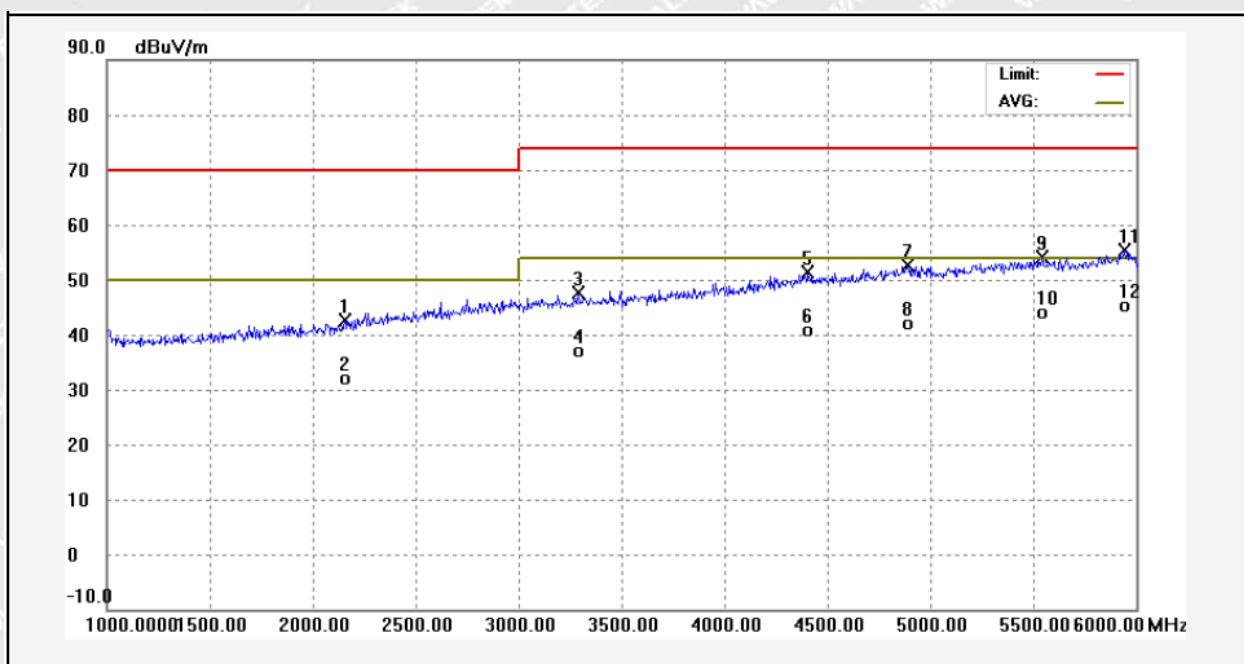


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2158.500	11.32	31.30	42.62	70.00	-27.38	peak	
2	2158.500	0.75	31.30	32.05	50.00	-17.95	AVG	
3	3293.500	13.05	34.49	47.54	74.00	-26.46	peak	
4	3293.500	2.75	34.49	37.24	54.00	-16.76	AVG	
5	4409.000	13.99	37.37	51.36	74.00	-22.64	peak	
6	4409.000	3.55	37.37	40.92	54.00	-13.08	AVG	
7	4893.000	14.01	38.71	52.72	74.00	-21.28	peak	
8	4893.000	3.50	38.71	42.21	54.00	-11.79	AVG	
9	5548.500	14.35	39.83	54.18	74.00	-19.82	peak	
10	5548.500	4.37	39.83	44.20	54.00	-9.80	AVG	
11	5947.500	14.38	40.89	55.27	74.00	-18.73	peak	
12	5947.500	4.48	40.89	45.37	54.00	-8.63	AVG	



Lighting + BT link mode with battery operated


Vertical Polarization

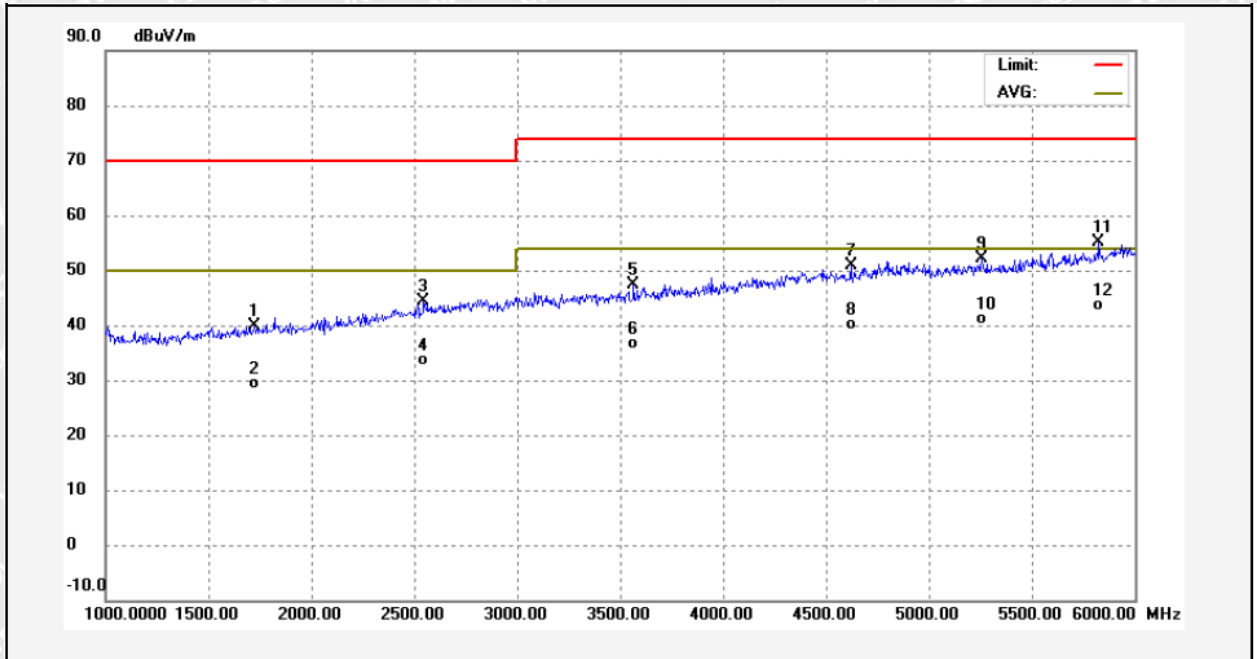

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	1727.000	9.60	30.20	39.80	70.00	-30.20	peak	
2	1727.000	-0.77	30.20	29.43	50.00	-20.57	AVG	
3	2545.500	11.66	32.81	44.47	70.00	-25.53	peak	
4	2545.500	0.81	32.81	33.62	50.00	-16.38	AVG	
5	3565.500	12.51	34.89	47.40	74.00	-26.60	peak	
6	3565.500	1.84	34.89	36.73	54.00	-17.27	AVG	
7	4624.000	13.03	37.79	50.82	74.00	-23.18	peak	
8	4624.000	2.26	37.79	40.05	54.00	-13.95	AVG	
9	5257.000	12.96	39.21	52.17	74.00	-21.83	peak	
10	5257.000	2.02	39.21	41.23	54.00	-12.77	AVG	
11	5829.500	14.69	40.47	55.16	74.00	-18.84	peak	
12	5829.500	3.20	40.47	43.67	54.00	-10.33	AVG	



Horizontal Polarization

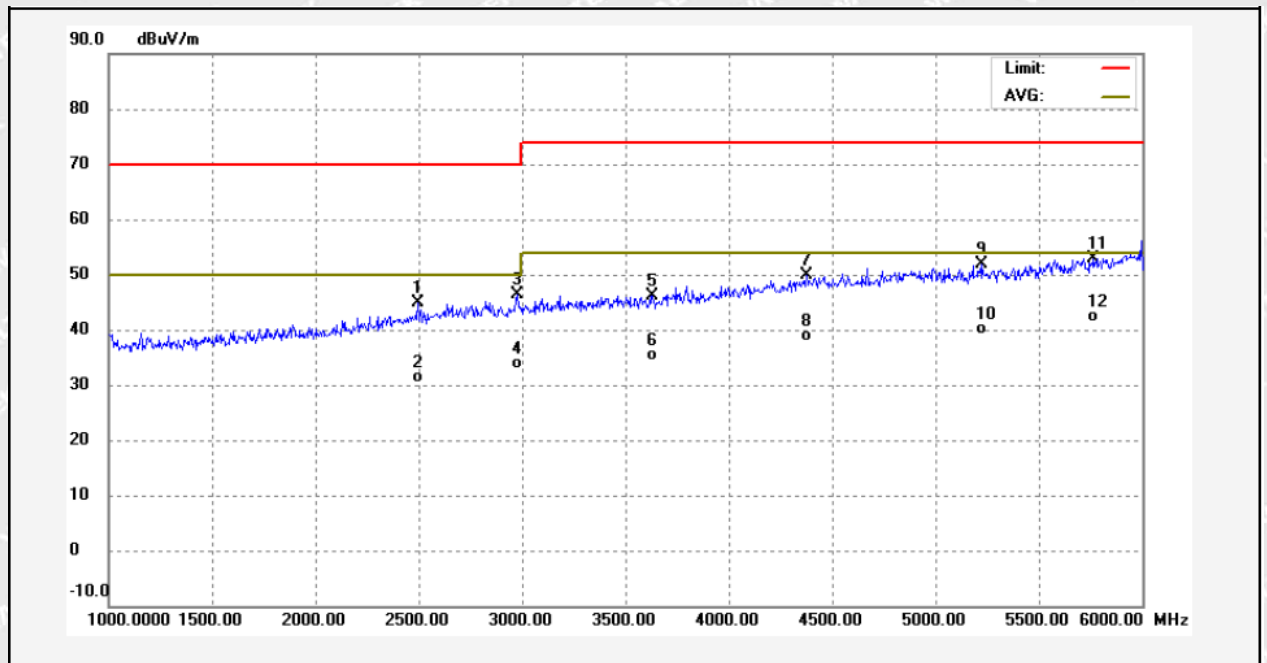

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2499.000	12.15	32.70	44.85	70.00	-25.15	peak	
2	2499.000	-1.40	32.70	31.30	50.00	-18.70	AVG	
3	2975.000	12.49	33.83	46.32	70.00	-23.68	peak	
4	2975.000	0.04	33.83	33.87	50.00	-16.13	AVG	
5	3634.000	11.14	35.05	46.19	74.00	-27.81	peak	
6	3634.000	0.41	35.05	35.46	54.00	-18.54	AVG	
7	4378.000	12.70	37.09	49.79	74.00	-24.21	peak	
8	4378.000	1.83	37.09	38.92	54.00	-15.08	AVG	
9	5225.500	12.66	39.15	51.81	74.00	-22.19	peak	
10	5225.500	0.96	39.15	40.11	54.00	-13.89	AVG	
11	5765.000	12.63	40.31	52.94	74.00	-21.06	peak	
12	5765.000	2.12	40.31	42.43	54.00	-11.57	AVG	



6 Immunity Test Results

6.1 Performance Criteria

Performance criterion A: The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer when the equipment is used as intended.

Performance criterion B: After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the equipment is used as intended. During the test, degradation of performance is allowed. However, no change of operating state or stored data is allowed to persist after the test

Performance criterion C: Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

WALTEK



6.2 Electrostatic Discharge (ESD)

Test Requirement	: EN 55035, EN IEC 61547
Test Method	: IEC 61000-4-2
Test Result	: Pass
Discharge Impedance	: 330Ω / 150pF
Discharge Voltage	: Air Discharge: ±8kV Contact Discharge: ±4kV HCP & VCP: ±4kV
Polarity	: Positive & Negative
Number of Discharge	: Minimum 10 times at each test point
Discharge Mode	: Single Discharge
Discharge Period	: 1 second minimum

6.2.1 E.U.T. Operation

Operating Environment:


Temperature	: 21.4°C
Humidity	: 51.7%RH
Barometric Pressure	: 101.2kPa

EUT Operation:

Input Voltage	: AC 230V/50Hz for mode 1; Battery 3.7V for mode 2
Operating Mode	: Mode 1: Working mode with AC input Mode 2: Working mode with battery operated

6.2.2 Block Diagram of Setup

The ESD test was performed in accordance with the IEC 61000-4-2.

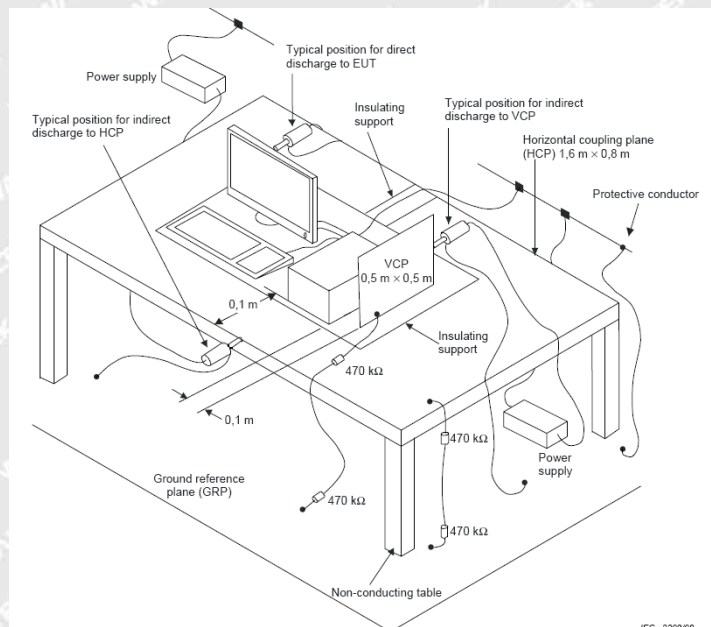



6.2.3 Direct Discharge Test Results

Observations:**Test points:**

1. All Exposed Surface & Seams;
2. All metallic part

Direct Discharge			Test Results	
Applied Voltage (kV)	Performance Criterion	Test Point	Contact Discharge	Air Discharge
±8	B	1	N/A	Pass*
±4	B	2	Pass*	N/A

Remark:

- * During the test no deviation was detected to the selected operation mode(s)

6.2.4 Indirect Discharge Test Results

Observations:**Test points:**

1. All sides.

Indirect Discharge			Test Results	
Applied Voltage (kV)	Performance Criterion	Test Point	Horizontal Coupling	Vertical Coupling
±4	B	1	Pass*	Pass*

Remark:

- * During the test no deviation was detected to the selected operation mode(s)



6.3 Continuous RF Electromagnetic Field Disturbances

Test Requirement	: EN 55035, EN IEC 61547
Test Method	: IEC 61000-4-3
Test Result	: Pass
Frequency Range	: 80MHz to 1000MHz, 1800MHz, 2600MHz, 3500MHz, 5000MHz
Test level	: 3V/m
Modulation	: 80%, 1kHz Amplitude Modulation.
Face of EUT	: Front, Back, Left, Right
Antenna polarisation.....	: Horizontal & Vertical
Test Distance	: 3m

6.3.1E.U.T. Operation

Operating Environment:


Temperature.....	: 21.4°C
Humidity	: 52.8%RH
Barometric Pressure	: 100.1kPa

EUT Operation:

Input Voltage.....	: AC 230V/50Hz for mode 1; Battery 3.7V for mode 2
Operating Mode	: Mode 1: Working mode with AC input Mode 2: Working mode with battery operated

6.3.2 Block Diagram of Setup

The Radio-frequency electromagnetic fields Immunity test was performed in accordance with the IEC 61000-4-3.

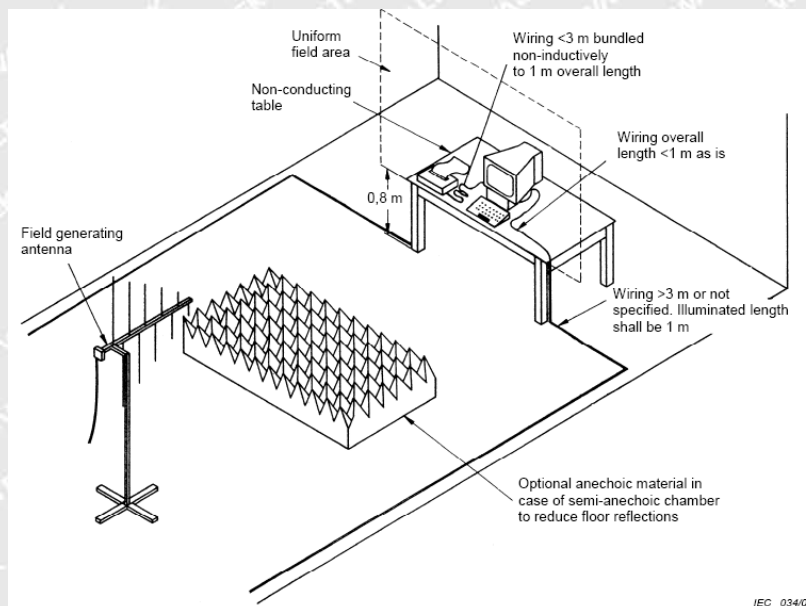



6.3.3 Test Results

Frequency	Face of EUT	Antenna polarisation	Test Level	Step Size	Dwell Time	Performance Criterion	Result
80 to 1000MHz	Front, Back, Left, Right	Horizontal	3V/m	1%	1s	A	Pass*
80 to 1000MHz	Front, Back, Left, Right	Vertical	3V/m	1%	1s	A	Pass*
1800MHz	Front, Back, Left, Right	Horizontal	3V/m	1%	1s	A	Pass*
1800MHz	Front, Back, Left, Right	Vertical	3V/m	1%	1s	A	Pass*
2600MHz	Front, Back, Left, Right	Horizontal	3V/m	1%	1s	A	Pass*
2600MHz	Front, Back, Left, Right	Vertical	3V/m	1%	1s	A	Pass*
3500MHz	Front, Back, Left, Right	Horizontal	3V/m	1%	1s	A	Pass*
3500MHz	Front, Back, Left, Right	Vertical	3V/m	1%	1s	A	Pass*
5000MHz	Front, Back, Left, Right	Horizontal	3V/m	1%	1s	A	Pass*
5000MHz	Front, Back, Left, Right	Vertical	3V/m	1%	1s	A	Pass*

Remark:

- * During the test no deviation was detected to the selected operation mode(s)



6.4 Electrical Fast Transients (EFT)

Test Requirement : EN 55035, EN IEC 61547
Test Method : IEC 61000-4-4
Test Result : Pass
Test Level : 1.0kV on AC Mains
Polarity : Positive & Negative
Repetition Frequency.... : 5kHz
Burst Duration : 5/50ns
Test Duration : 2 minutes per level & polarity

6.4.1E.U.T. Operation

Operating Environment:

Temperature..... : 22.1°C
Humidity : 51.4%RH
Barometric Pressure..... : 102.8kPa

EUT Operation:


Input Voltage..... : AC 230V/50Hz
Operating Mode : Working mode with AC input

WALTEK



6.4.2 Block Diagram of Setup

The Electrical Fast Transients Immunity test was performed in accordance with the IEC 61000-4-4.

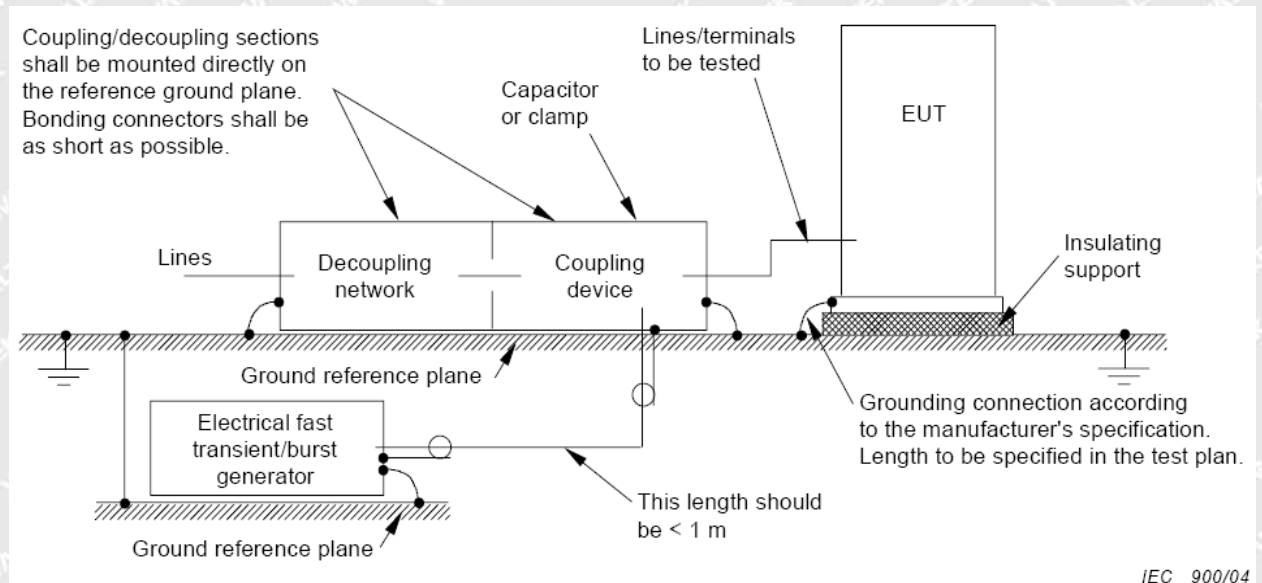

6.4.3 Test Results

Test Port	Test Level(kV)	Performance Criterion	Result
Line-Neutral	± 1.0	B	Pass*

Remark:

* During the test no deviation was detected to the selected operation mode(s)



6.5 Surge

Test Requirement : EN 55035, EN IEC 61547

Test Method : IEC 61000-4-5

Test Result : Pass

Test level : $\pm 1\text{kV}$ Live to Neutral, $\pm 2\text{kV}$ Live to PE and Neutral to PE

Interval : 60s between each surge

No. of surges : five positive and five negative pulses each at 0° , 90° , 180° and at 270°

6.5.1E.U.T. Operation

Operating Environment:

Temperature : 21.2°C

Humidity : 51.7%RH

Barometric Pressure : 102.4kPa


EUT Operation:

Input Voltage : AC 230V/50Hz

Operating Mode : Working mode with AC input

6.5.2Block Diagram of Setup

The Surge Immunity test was performed in accordance with the IEC 61000-4-5.

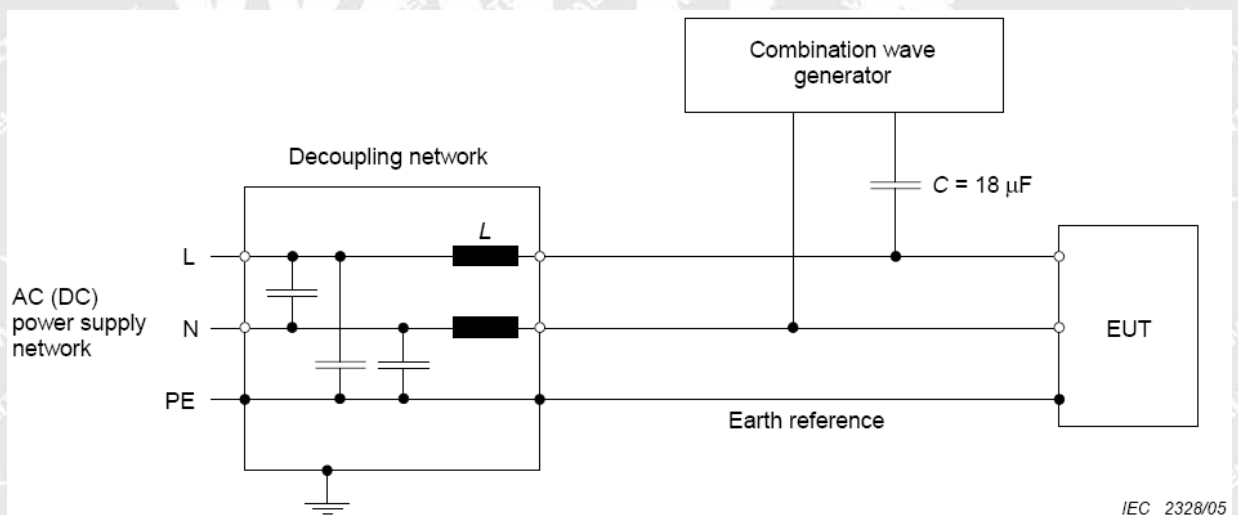



6.5.3Test Result

Test Port	Applied Voltage (kV)	Performance criterion	Result
Between Phase And Phase	± 1	B	N/A
Between Live And Neutral	± 1	B	Pass*
Between Live And Earth	± 2	B	N/A
Between Neutral And Earth	± 2	B	N/A

Remark:

* During the test no deviation was detected to the selected operation mode(s)

WALTEK



6.6 Continuous Induced RF Disturbance

Test Requirement : EN 55035, EN IEC 61547

Test Method : IEC 61000-4-6

Test Result : Pass

Frequency Range : 0.15 to 10MHz, 10 to 30MHz, 30 to 80MHz

Test level : 3V r.m.s. / 3~1V r.m.s. / 1V r.m.s. (unmodulated emf into 150 Ω)

Modulation : 80%, 1kHz Amplitude Modulation.

6.6.1E.U.T. Operation

Operating Environment:

Temperature : 22.8°C

Humidity : 52.3%RH

Barometric Pressure : 102.1kPa


EUT Operation:

Input Voltage : AC 230V/50Hz

Operating Mode : Working mode with AC input

6.6.2 Block Diagram of Setup

The Injected Currents Immunity test was performed in accordance with the IEC 61000-4-6.

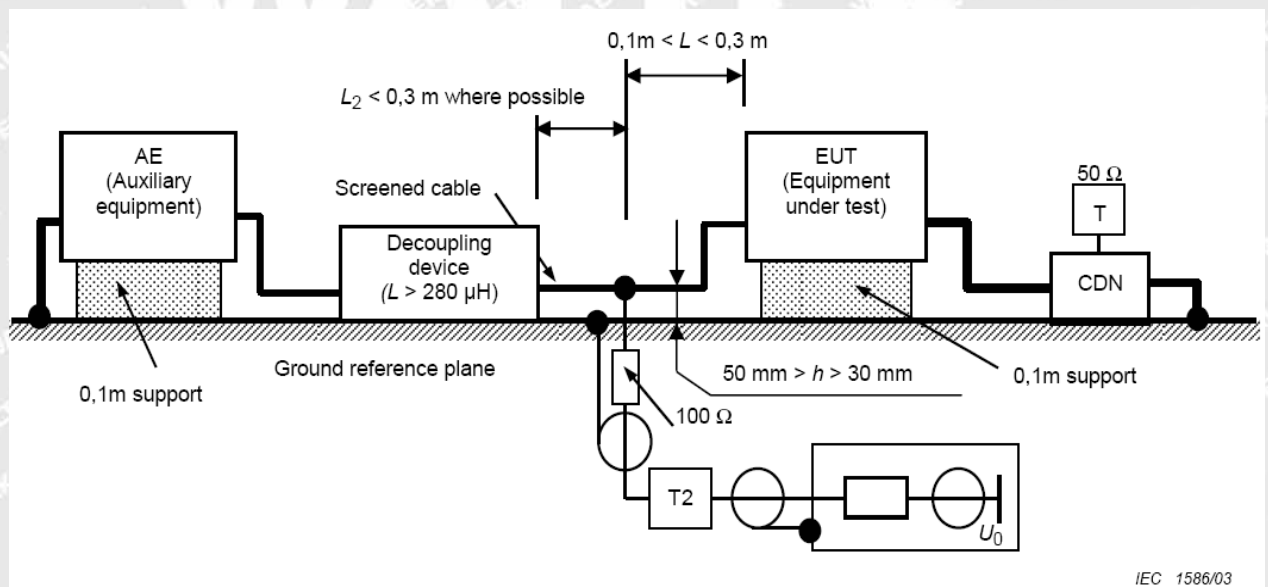



6.6.3Test Results

Frequency	Line	Test Level	Modulation	Step Size	Dwell Time	Performance Criterion	Result
0.15MHz to 10MHz	2 Wire AC Supply Cables	3Vr.m.s.	80%, 1kHz Amp. Mod.	1%	1s	A	Pass*
10MHz to 30MHz	2 Wire AC Supply Cables	3 to 1 Vr.m.s.	80%, 1kHz Amp. Mod.	1%	1s	A	Pass*
30MHz to 80MHz	2 Wire AC Supply Cables	1Vr.m.s.	80%, 1kHz Amp. Mod.	1%	1s	A	Pass*

Remark:

* During the test no deviation was detected to the selected operation mode(s)

WALTEK



6.7 Voltage Dips and Interruptions

Test Requirement	: EN 55035, EN IEC 61547
Test Method	: IEC 61000-4-11
Test Result	: Pass
Test Level(Voltage reduction)	: >90% & 30 % of Induction
No. of Dips / Interruptions	: 1 per Level at 20ms intervals

6.7.1E.U.T. Operation

Operating Environment:


Temperature	: 21.8°C
Humidity	: 51.2%RH
Barometric Pressure	: 101.7kPa

EUT Operation:

Input Voltage	: AC 230V/50Hz
Operating Mode	: Working mode with AC input

6.7.2 Block Diagram of Setup

The Voltage Dips and Interruptions Immunity test was performed in accordance with the IEC 61000-4-11.

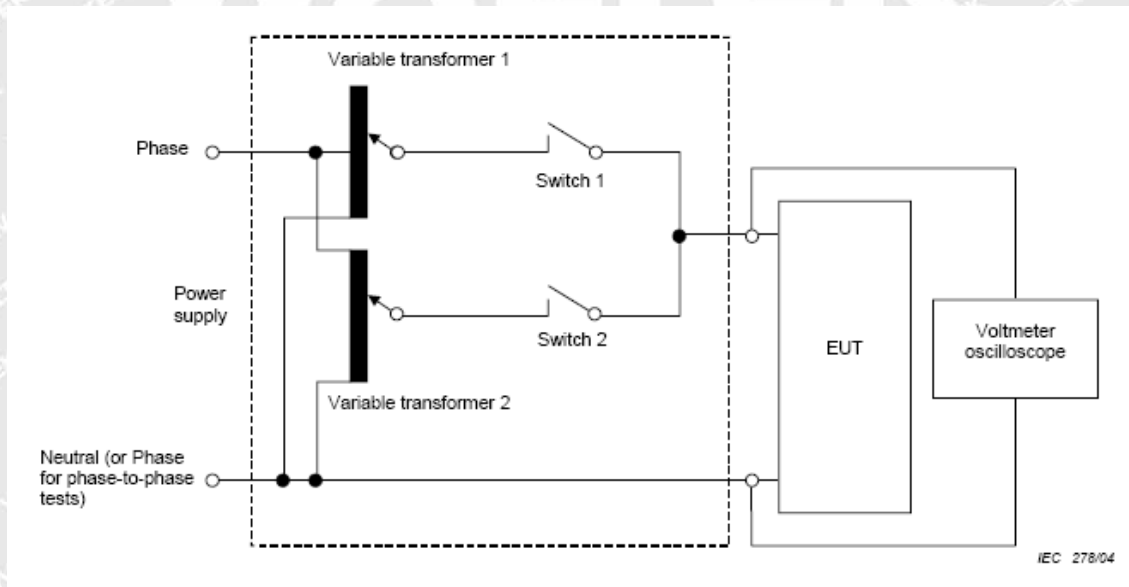



6.7.3Test Results

Test Item	Test Level in %U _T	Performance criterion	50Hz		60Hz	
			Duration	Result	Duration	Result
Voltage Dips	< 5	B	0.5	Pass*	0.5	Pass*
	70	C	25	Pass*	30	Pass*
Voltage Interruptions	< 5	C	250	Pass*	300	Pass*

Remark:

* During the test no deviation was detected to the selected operation mode(s)

WALTEK



7 Photographs – Test Setup

7.1 Photograph – Mains Terminal Disturbance Voltage Test Setup



1.2 Photograph – Radiated Electromagnetic Disturbance Test Setup





7.2 Photograph – Radiated Emission Test Setup, 30MHz to 1GHz




7.3 Photograph – Radiated Emission Test Setup, 1GHz to 6GHz





7.4 Photograph – ESD Immunity Test Setup

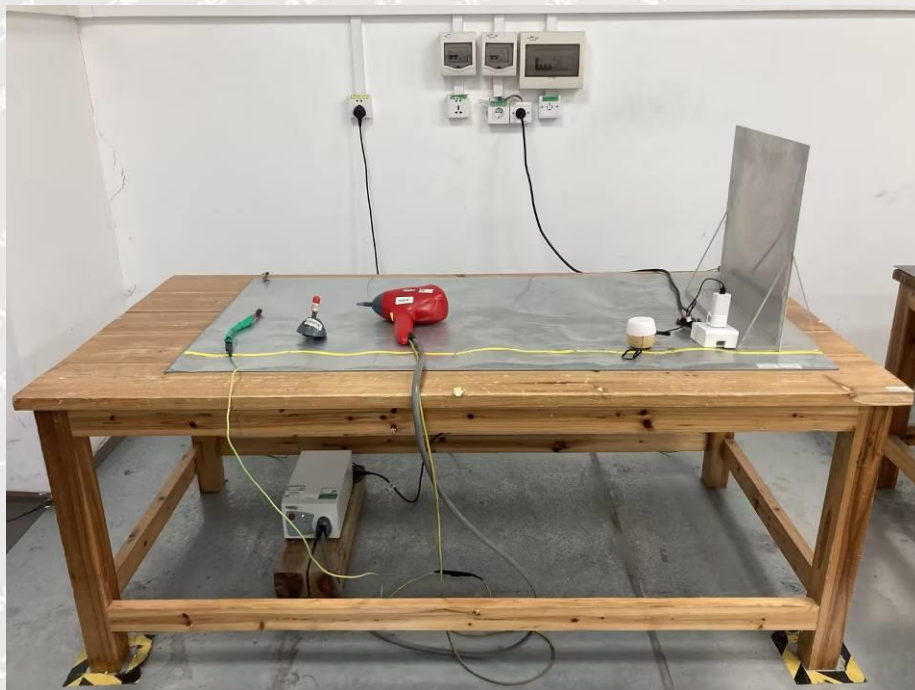

7.5 Photograph – Continuous RF Electromagnetic Field Disturbances Test Setup






7.6 Photograph – EFT Immunity Test Setup




7.7 Photograph – Surge Immunity Test Setup

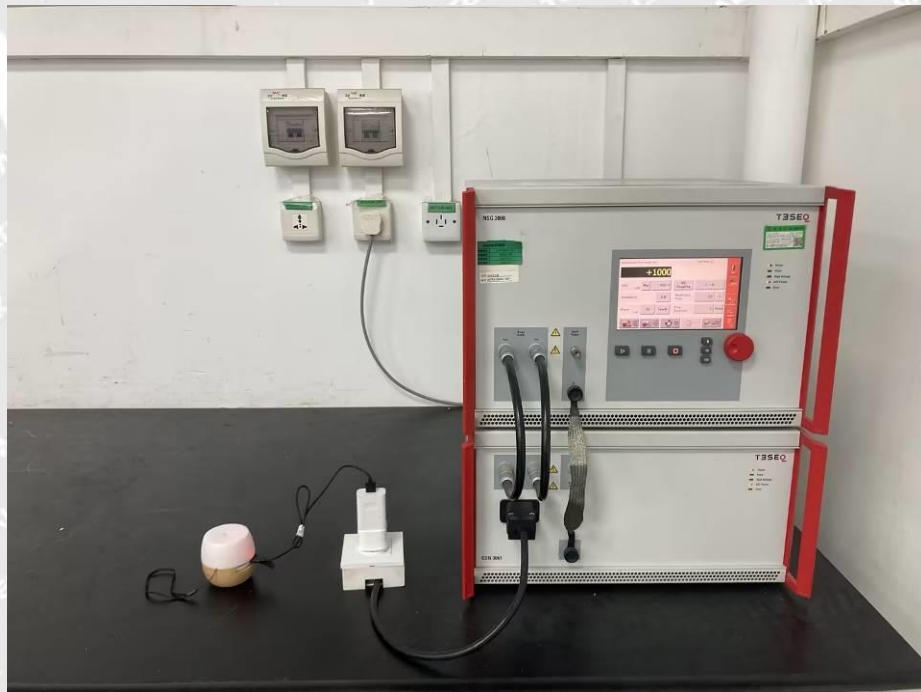



7.8 Photograph – Continuous Induced RF Disturbance Test Setup

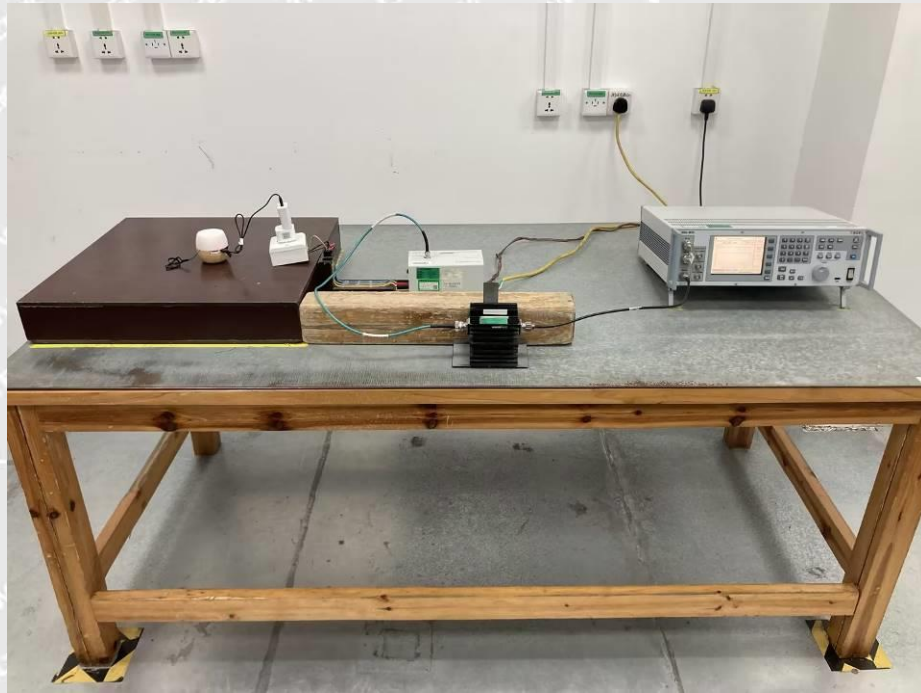

7.9 Photograph – Voltage Dips and Interruptions Immunity Test Setup







8 Photographs – Constructional Details


8.1 EUT – External Photos





8.2 EUT – Internal Photos

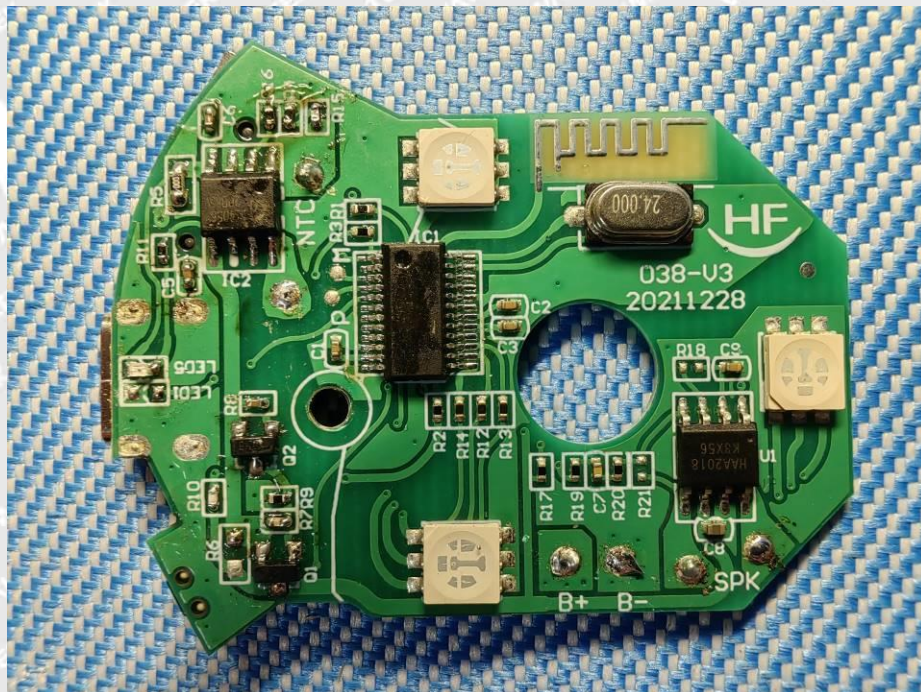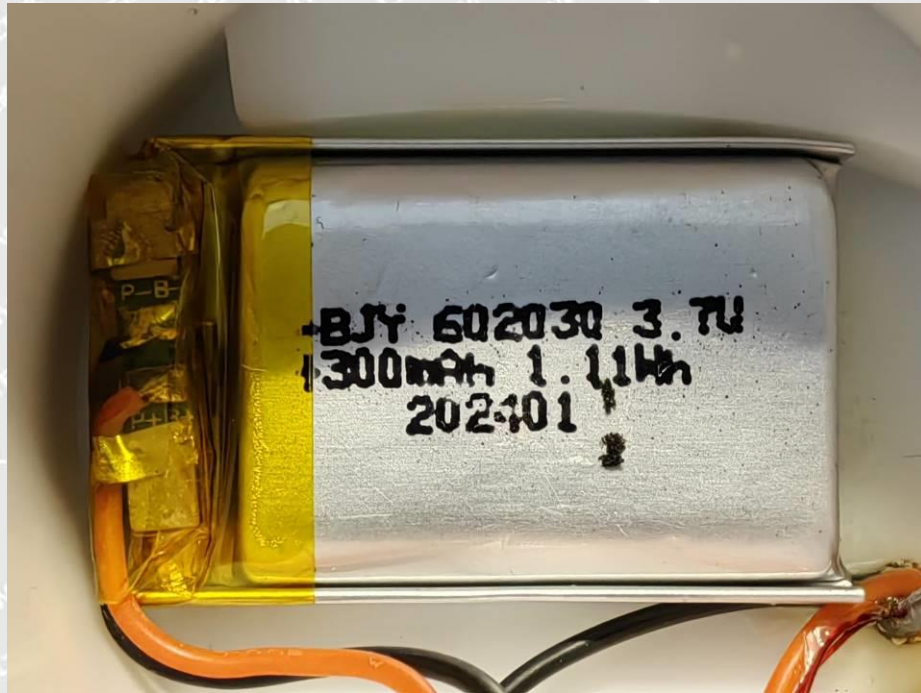

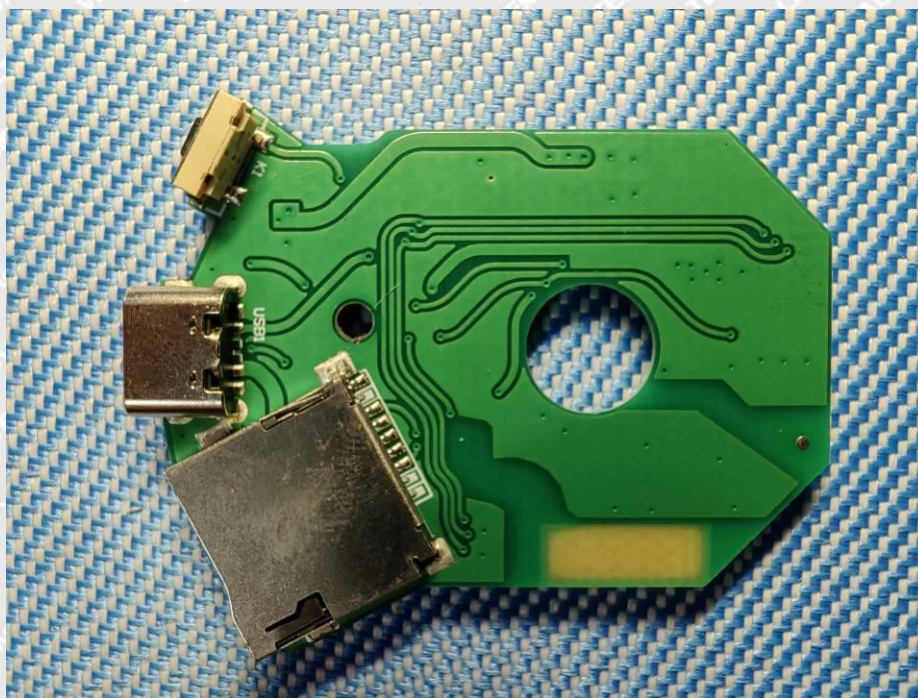

===== End of Report =====

WALTEK